




## FOUR CHARACTER 6.9 mm (0.27 INCH) 5X7 ALPHANUMERIC DISPLAYS

STANDARD RED HDSP-2490  
 YELLOW HDSP-2491  
 HIGH EFFICIENCY RED HDSP-2492  
 HIGH PERFORMANCE GREEN HDSP-2493

### Features

- FOUR COLORS  
 Standard Red  
 Yellow  
 High Efficiency Red  
 High Performance Green
- INTEGRATED SHIFT REGISTERS WITH CONSTANT CURRENT DRIVERS
- COMPACT CERAMIC PACKAGE
- WIDE VIEWING ANGLE
- END STACKABLE FOUR CHARACTER PACKAGE
- TTL COMPATIBLE
- 5 x 7 LED MATRIX DISPLAYS FULL ASCII SET
- CATEGORIZED FOR LUMINOUS INTENSITY
- HDSP-2491/2493 ALSO CATEGORIZED FOR COLOR

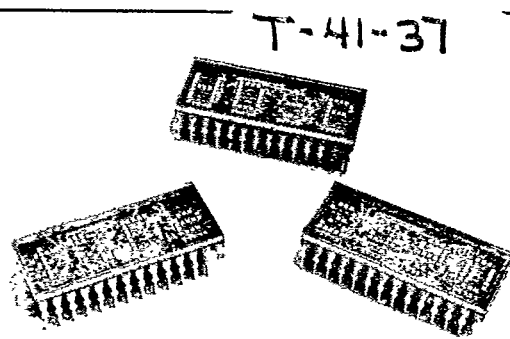

### Typical Applications


- INSTRUMENTS
- BUSINESS MACHINES
- INDUSTRIAL PROCESS CONTROL EQUIPMENT
- MEDICAL INSTRUMENTS
- COMPUTER PERIPHERALS
- MILITARY GROUND SUPPORT EQUIPMENT

### Description

The HDSP-2490/-2491/-2492/-2493 series of displays are 6.9 mm 0.27 inch 5 x 7 LED arrays for display of alphanumeric information. These devices are available in standard red, yellow, high efficiency red, and high performance green.

Each four character cluster is contained in a 28 pin dual-in-line package. An on-board SIPO Serial-In-Parallel-Out 7-bit shift register associated with each digit controls constant current LED row drivers. Full character display is achieved by external column strobing.

### Package Dimensions

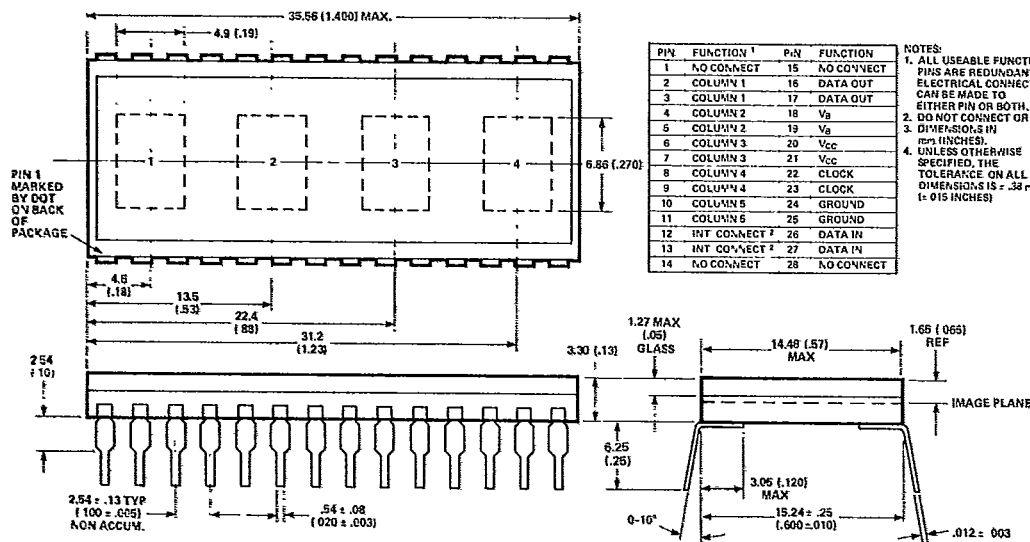



### Absolute Maximum Ratings (HDSP-2490/-2491/-2492/-2493)

Supply Voltage $V_{CC}$ to Ground .....	-0.5V to 6.0V	Storage Temperature Range, $T_s$ .....	-55°C to +100°C
Inputs, Data Out and $V_B$ .....	-0.5V to $V_{CC}$	Maximum Allowable Power Dissipation	
Column Input Voltage, $V_{COL}$ .....	-0.5V to +6.0V	at $T_A = 25^\circ\text{C}$ <sup>1,2,3</sup> .....	1.46 Watts
Free Air Operating Temperature Range, $T_A$ <sup>[1,2]</sup> .....	-20°C to +85°C	Maximum Solder Temperature 1.59 mm (0.063 in.)	
		Below Seating Plane $t < 5$ sec .....	260°C

T-41-37

### Recommended Operating Conditions (HDSP-2490/-2491/-2492/-2493)

Parameter	Symbol	Min.	Nom.	Max.	Units	Fig.
Supply Voltage	$V_{CC}$	4.75	5.0	5.25	V	
Data Out Current, Low State	$I_{OL}$			1.6	mA	
Data Out Current, High State	$I_{OH}$			-0.5	mA	
Column Input Voltage, Column On HDSP-2490	$V_{COL}$	2.4		3.5	V	4
Column Input Voltage, Column On HDSP-2491/-2492/-2493	$V_{COL}$	2.75		3.5	V	4
Setup Time	$t_{setup}$	70	45		ns	1
Hold Time	$t_{hold}$	30	0		ns	1
Width of Clock	$t_{m(Clock)}$	75			ns	1
Clock Frequency	$f_{clock}$	0		3	MHz	1
Clock Transition Time	$t_{rHL}$			200	ns	1
Free Air Operating Temperature Range <sup>1,2</sup>	$T_A$	-20		85	°C	2

### Electrical Characteristics Over Operating Temperature Range

Unless otherwise specified

Description	Symbol	Test Conditions	Min.	Typ.*	Max.	Units	Fig.	
Supply Current	$I_{CC}$	$V_{CC} = 5.25V$ $V_{CLOCK} = V_{DATA} = 2.4V$ All SR Stages = Logical 1	$V_B = 0.4V$		45	60	mA	
			$V_B = 2.4V$		73	95	mA	
Column Current at any Column Input	$I_{COL}$	$V_{CC} = 5.25V$ $V_{COL} = 3.5V$				500	$\mu A$	4
Column Current at any Column Input	$I_{COL}$	All SR Stages = Logical 1				380	520	
$V_B$ , Clock or Data Input Threshold High	$V_{IH}$	$V_{CC} = V_{COL} = 4.75V$	2.0				V	
$V_B$ , Clock or Data Input Threshold Low	$V_{IL}$					0.8	V	
Input Current Logical 1	$V_B$ , Clock	$V_{CC} = 5.25V, V_{IH} = 2.4V$		20	80		$\mu A$	
	Data In			10	40		$\mu A$	
Input Current Logical 0	$V_B$ , Clock	$V_{CC} = 5.25V, V_{IL} = 0.4V$		-500	-800		$\mu A$	
	Data In			-250	-400		$\mu A$	
Data Out Voltage	$V_{OH}$	$V_{CC} = 4.75V, I_{OH} = -0.5 mA, I_{COL} = 0 mA$	2.4	3.4			V	
	$V_{OL}$	$V_{CC} = 4.75V, I_{OL} = 1.6 mA, I_{COL} = 0 mA$		0.2	0.4		V	
Power Dissipation Per Package**	$P_D$	$V_{CC} = 5.0V, V_{COL} = 3.5V, 17.5\% DF$ 15 LEDs on per character, $V_B = 2.4V$		0.78			W	2
Thermal Resistance IC Junction-to-Case	$R_{\theta J-C}$			20			°C/W Device	2

\*All typical values specified at  $V_{CC} = 5.0V$  and  $T_A = 25^\circ\text{C}$  unless otherwise noted

\*\*Power dissipation per package with four characters illuminated.

**Notes:**

- 1 Operation above 85°C ambient is possible provided the following conditions are met. The junction should not exceed 125°C  $T_J$  and the case temperature as measured at pin 1 or the back of the display should not exceed 100°C  $T_C$ .
- 2 The device should be derated linearly above 60°C at 22.2 mW/°C. This derating is based on a device mounted in a socket having a thermal resistance from case to ambient at 25°C/W per device. See Figure 2 for power deratings based on a lower thermal resistance.
3. Maximum allowable dissipation is derived from  $V_{CC} = 5.25V, V_B = 2.4V, V_{COL} = 3.5V$  20 LEDs on per character, 20% DF.

T-41-37

## Optical Characteristics

### STANDARD RED HDSP-2490

Description	Symbol	Test Conditions	Min.	Typ.*	Max.	Units	Fig.
Peak Luminous Intensity per LED <sup>[4,8]</sup> (Character Average)	$I_{VPEAK}$	$V_{CC} = 5.0V, V_{COL} = 3.5V$ $T_1 = 25^\circ C^{[6]}, V_B = 2.4V$	220	370		$\mu cd$	3
Peak Wavelength	$\lambda_{PEAK}$			655		nm	
Dominant Wavelength <sup>[7]</sup>	$\lambda_d$			639		nm	

### YELLOW HDSP-2491

Description	Symbol	Test Conditions	Min.	Typ.*	Max.	Units	Fig.
Peak Luminous Intensity per LED <sup>[4,8]</sup> (Character Average)	$I_{VPEAK}$	$V_{CC} = 5.0V, V_{COL} = 3.5V$ $T_1 = 25^\circ C^{[6]}, V_B = 2.4V$	850	1400		$\mu cd$	3
Peak Wavelength	$\lambda_{PEAK}$			583		nm	
Dominant Wavelength <sup>[5,7]</sup>	$\lambda_d$			585		nm	

### HIGH EFFICIENCY RED HDSP-2492

Description	Symbol	Test Conditions	Min.	Typ.*	Max.	Units	Fig.
Peak Luminous Intensity per LED <sup>[4,8]</sup> (Character Average)	$I_{VPEAK}$	$V_{CC} = 5.0V, V_{COL} = 3.5V$ $T_1 = 25^\circ C^{[6]}, V_B = 2.4V$	850	1530		$\mu cd$	3
Peak Wavelength	$\lambda_{PEAK}$			636		nm	
Dominant Wavelength <sup>[7]</sup>	$\lambda_d$			626		nm	

### HIGH PERFORMANCE GREEN HDSP-2493

Description	Symbol	Test Conditions	Min.	Typ.*	Max.	Units	Fig.
Peak Luminous Intensity per LED <sup>[4,8]</sup> (Character Average)	$I_{VPEAK}$	$V_{CC} = 5.0V, V_{COL} = 3.5V$ $T_1 = 25^\circ C^{[6]}, V_B = 2.4V$	1280	2410		$\mu cd$	3
Peak Wavelength	$\lambda_{PEAK}$			568		nm	
Dominant Wavelength <sup>[5,7]</sup>	$\lambda_d$			574		nm	

\*All typical values specified at  $V_{CC} = 5.0V$  and  $T_A = 25^\circ C$  unless otherwise noted.

\*\*Power dissipation per package with four characters illuminated.

#### Notes:

- The characters are categorized for luminous intensity with the intensity category designated by a letter code on the bottom of the package.
- The HDSP-2491/-2493 are categorized for color with the color category designated by a number code on the bottom of the package.
- $T_1$  refers to the initial case temperature of the device immediately prior to the light measurement.
- Dominant wavelength  $\lambda_d$  is derived from the CIE chromaticity diagram, and represents the single wavelength which defines the color of the device.
- The luminous sterance of the LED may be calculated using the following relationships:  
 $L_v \text{ cd/m}^2 = I_v \text{ Candela} / A \text{ Metre}^2$   
 $L_v \text{ (Footlamberts)} = \pi I_v \text{ (Candela)} / A \text{ (Foot)}^2$   
 $A = 5.3 \times 10^{-8} \text{ M}^2 = 5.8 \times 10^{-7} \text{ Foot}^2$

## Electrical Description

The HDSP-249X series of four character alphanumeric displays have been designed to allow the user maximum flexibility in interface electronics design. Each four character display module features DATA IN and DATA OUT terminals arrayed for easy PC board interconnection. DATA OUT represents the output of the 7th bit of digit number 4 shift register. Shift register clocking occurs on the high to low transition of the clock input. The like columns of each character in a display cluster are tied to a single pin. Figure 5 is the block diagram for the displays. High true data in the shift register enables the output current mirror driver stage associated with each row of LEDs in the 5 x 7 diode array.

The TTL compatible  $V_B$  input may either be tied to  $V_{CC}$  for maximum display intensity or pulse width modulated to achieve intensity control and reduction in power consumption.

In the normal mode of operation, input data for digit 4 column 1 is loaded into the 7 on-board shift register locations 1 through 7. Column 1 data for digits 3, 2 and 1 is similarly shifted into the display shift register locations. The

column 1 input is now enabled for an appropriate period of time,  $T$ . A similar process is repeated for columns 2, 3, 4 and 5. If the time necessary to decode and load data into the shift register is  $t$ , then with 5 columns, each column of the display is operating at a duty factor of:

$$D.F. = \frac{T}{5 \cdot t + T}$$

The time frame,  $t + T$ , allotted to each column of the display is generally chosen to provide the maximum duty factor consistent with the minimum refresh rate necessary to achieve a flicker free display. For most strobed display systems, each column of the display should be refreshed (turned on) at a minimum rate of 100 times per second.

With columns to be addressed, this refresh rate then gives a value for the time  $t + T$  of:

$$1 / (5 \times 100) = 2 \text{ msec}$$

If the device is operated at 3.0 MHz clock rate maximum, it is possible to maintain  $t \ll T$ . For short display strings, the duty factor will then approach 20%.

For further applications information, refer to HP Application Note 1016.

T-41-37

SOLID STATE DISPLAYS

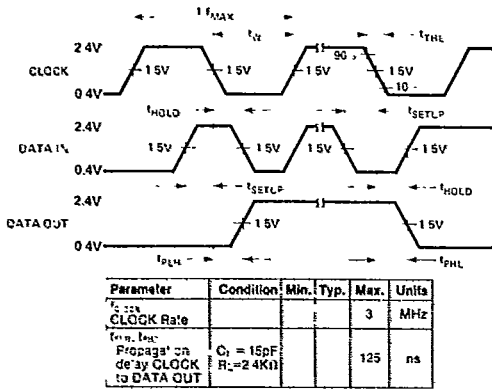


Figure 1. Switching Characteristics HDSP-2490/-2491/-2492/-2493 (TA = -20°C to -85°C)

## Mechanical and Thermal Considerations

The HDSP-2490/-2491/-2492/-2493 are available in standard ceramic dual-in-line packages. They are designed for plugging into sockets or soldering into PC boards. The packages may be horizontally or vertically stacked for character arrays of any desired size. The HDSP-2490/-2491/-2492/-2493 utilize a high output current IC to provide excellent readability in bright ambient lighting. Full power operation  $V_{CC} = 5.25V$ ,  $V_B = 2.4V$ ,  $V_{COL} = 3.5V$  with worst case thermal resistance from IC junction to ambient of  $45^\circ C/watt/device$  is possible up to ambient temperature of  $60^\circ C$ . For operation above  $60^\circ C$ , the maximum device dissipation should be derated linearly at  $22.2 mW/^\circ C$  see Figure 2. With an improved thermal design, operation at higher ambient temperatures without derating is possible. Please refer to Application Note 1016 for further information.

Power derating for this family of displays can be achieved in several ways. The power supply voltage can be lowered to a minimum of 4.75V. Column Input Voltage,  $V_{COL}$ , can be decreased to the recommended minimum values of 2.4V for the HDSP-2490 and 2.75V for the HDSP-2491/-2492/-2493. Also, the average drive current can be decreased through pulse width modulation of  $V_B$ .

The HDSP-2490, -2491/-2492/-2493 displays have glass windows. A front panel contrast enhancement filter is desirable in most actual display applications. Some suggested

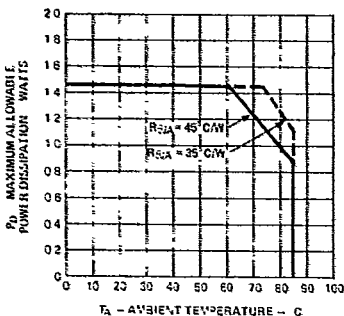


Figure 2. Maximum Allowable Power Dissipation vs. Temperature

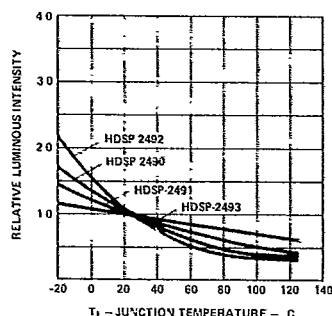


Figure 3. Relative Luminous Intensity vs. Temperature

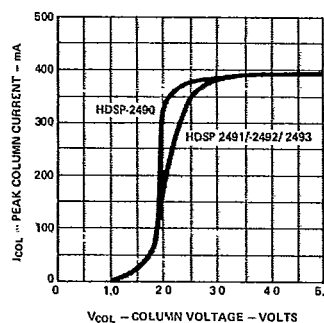


Figure 4. Peak Column Current vs. Column Voltage

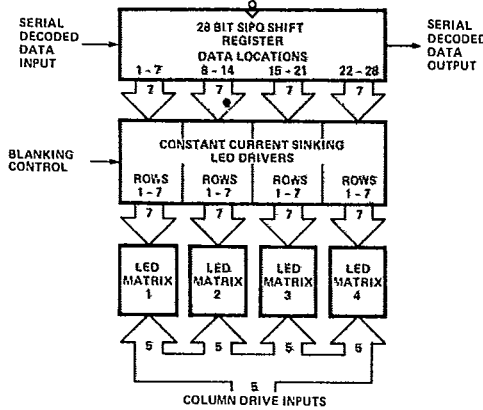


Figure 5. Block Diagram of HDSP-2490/-2491/-2492/-2493

filter materials are provided in Figure 6. Additional information on filtering and contrast enhancement can be found in HP Application Note 1015.


Post solder cleaning may be accomplished using water or Freon/alcohol mixtures formulated for vapor cleaning processing or Freon/alcohol mixtures formulated for room temperature cleaning. Freon/alcohol vapor cleaning processing for up to 2 minutes in vapors at boiling is permissible. Suggested solvents include Freon TF, Freon TE, Genesolv DI-15, Genesolv DE-15, and water.

Display Color	Ambient Lighting		
	Dim	Moderate	Bright
HDSP-2000 Std Red	Pare graphic Dark Red 63 Ruby Red 60 Chequers Red 118 Plexiglass 2423		
HDSP-2001 Yellow	Pare graphic Yellow 27 Chequers Amoer 107	Polaroid HNC137 3M Lign+ Contr. Film Panelgraphc Gray 10	Polaroid HNC10-Glass Marks Polarized MPC-0301-8-10 Note 1
HDSP-2002 HER	Pare graphic Ruby Red 60 Chequers Red 112	Chequers Grey 103	Polaroid HNC10 Glass Marks Polarized MPC-0201-2-22
HDSP-2003 HP Green	Panelgraphc Green 48 Chequers Green 107		Polaroid HNC10-Glass Marks Polarized MPC-0101-5-12

Note: 1. Optically coated circular polarized filters, such as Polaroid HNC10.

Figure 6. Contrast Enhancement Filters

**Package Dimensions**

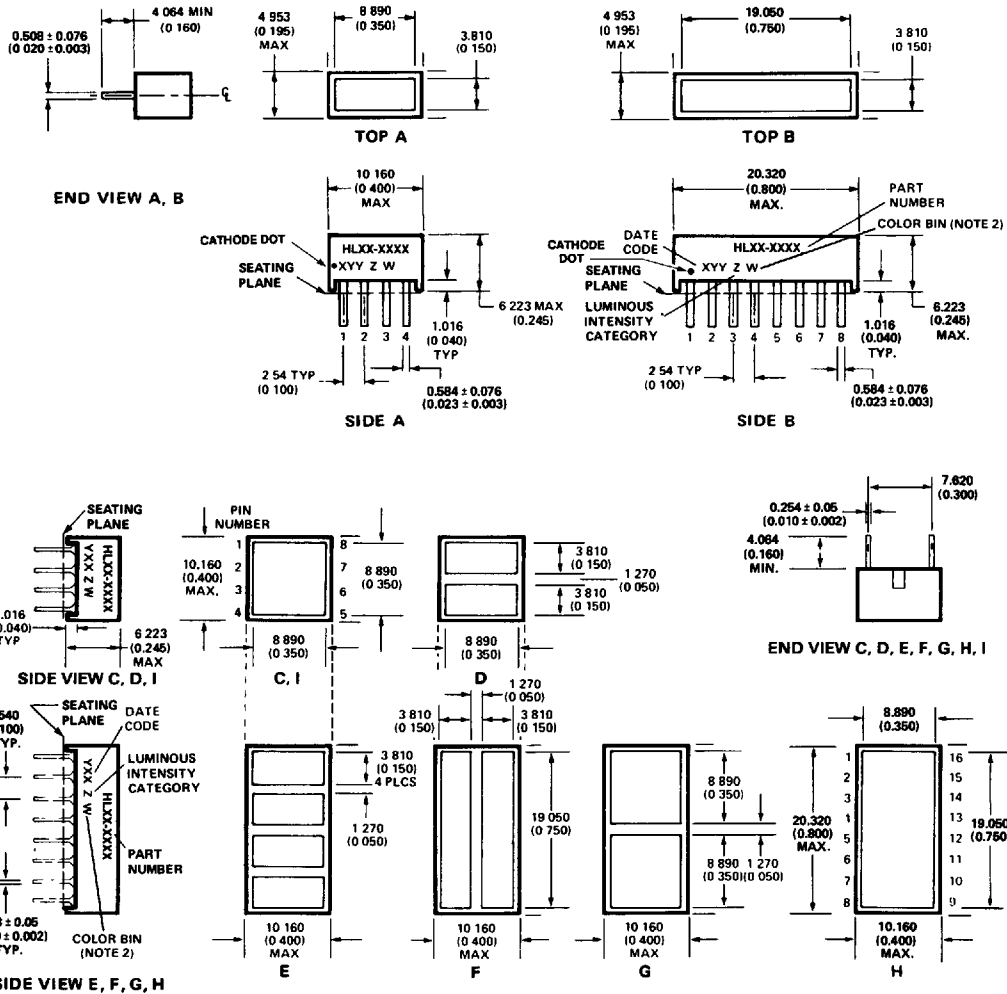

**NOTES:**  
 1. DIMENSIONS IN MILLIMETRES (INCHES). TOLERANCES ±0.25 mm (±0.010 IN.) UNLESS OTHERWISE INDICATED.  
 2. FOR YELLOW AND GREEN DEVICES ONLY.

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.