

# ER200 THRU ER206

## SUPERFAST RECOVERY RECTIFIERS

VOLTAGE - 50 to 600 Volts CURRENT - 2.0 Amperes

### FEATURES

- Superfast recovery times-epitaxial construction
- Low forward voltage, high current capability
- Exceeds environmental standards of MIL-S-19500/228
- Hermetically sealed
- Low leakage
- High surge capability
- Plastic package has Underwriters Laboratories

Flammability Classification 94V-O utilizing

Flame Retardant Epoxy Molding Compound

### MECHANICAL DATA

Case: Molded plastic, DO-15


Terminals: Axial leads, solderable to MIL-STD-202,  
Method 208

Polarity: Color Band denotes cathode end

Mounting Position: Any

Weight: 0.015 ounce, 0.4 gram

### DO-15

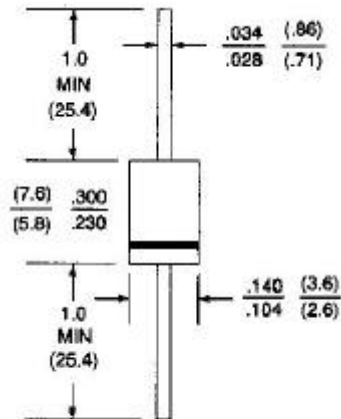

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 ambient temperature unless otherwise specified.

Resistive or inductive load, 60Hz.

	ER200	ER201	ER201A	ER202	ER203	ER204	ER206	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	150	200	300	400	600	V
Maximum RMS Voltage	35	70	105	140	210	320	420	V
Maximum DC Blocking Voltage	50	100	150	200	300	400	600	V
Maximum Average Forward Current .375"(9.5mm) lead length at T <sub>A</sub> =55	2.0							A
Peak Forward Surge Current, I <sub>FM</sub> (surge): 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	50.0							A
Maximum Forward Voltage at 2.0A DC	.95				1.25	1.7		V
Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0							A
Maximum DC Reverse Current at Rated DC Blocking Voltage T <sub>A</sub> =125	200							A
Maximum Reverse Recovery Time(Note 1)	35.0							ns
Typical Junction capacitance (Note 2)	22							pF
Typical Junction Resistance(Note 3) R <sub>JA</sub>	40							/W
Operating and Storage Temperature Range T <sub>J</sub>	-55 to +150							

### NOTES:

1. Reverse Recovery Test Conditions: I<sub>F</sub>=.5A, I<sub>R</sub>=1A, I<sub>rr</sub>=.25A

2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
3. Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

**RATING AND CHARACTERISTIC CURVES**

ER200 THRU ER206

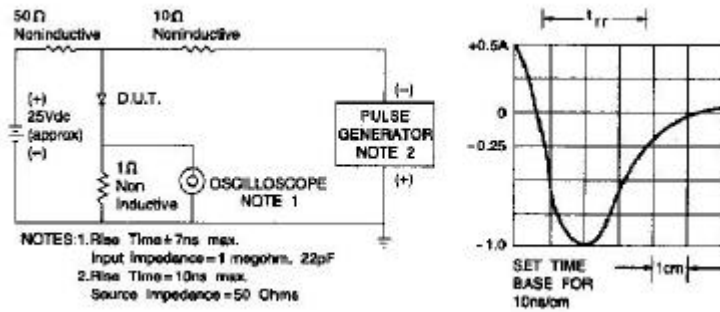


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

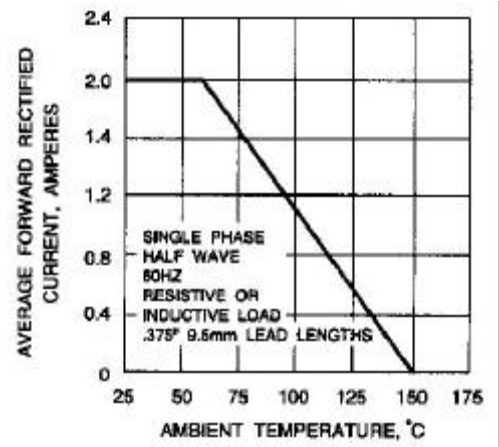


Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

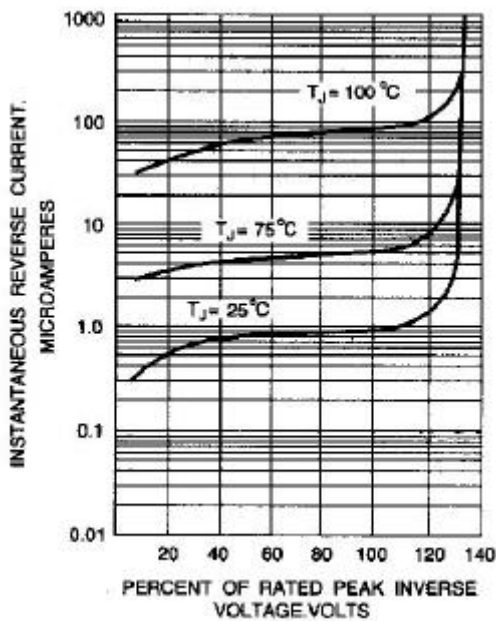


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

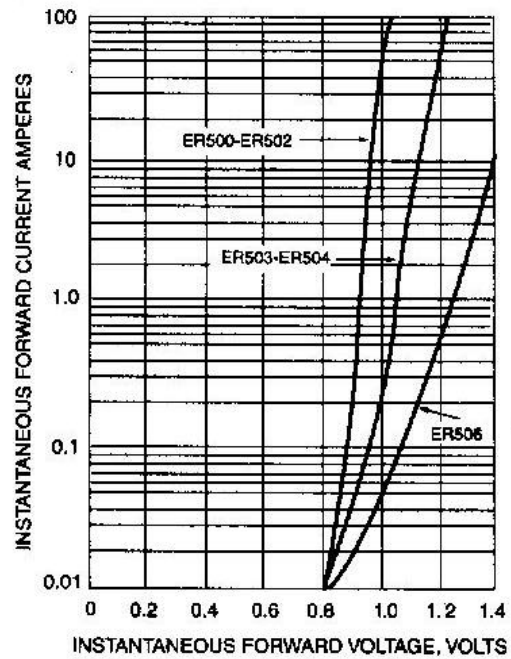


Fig. 4-FORWARD CURRENT DERATING CURVE

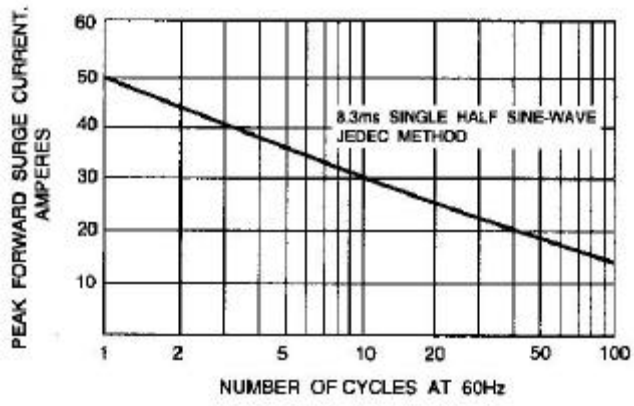


Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT

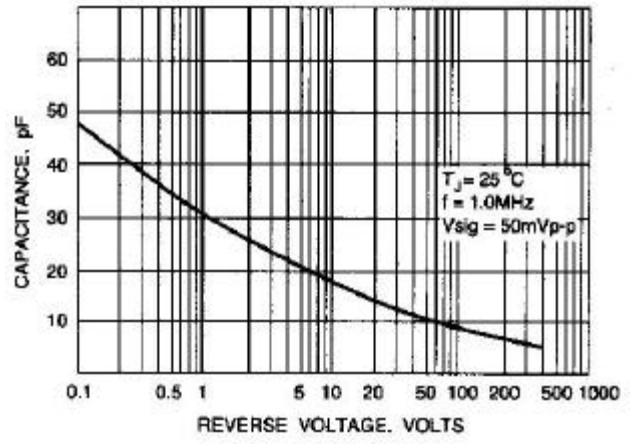


Fig. 6-TYPICAL JUNCTION CAPACITANCE

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.