

CEP6031L/CEB6031L


March 1998

N-Channel Logic Level Enhancement Mode Field Effect Transistor

4

FEATURES

- 30V , 60A , $R_{DS(ON)}=10m\Omega$ @ $V_{GS}=10V$.
 $R_{DS(ON)}=15m\Omega$ @ $V_{GS}=4.5V$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handling capability.
- TO-220 & TO-263 package.

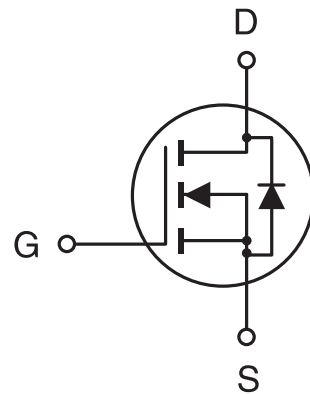

ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Limit | Unit |
|---------------------------------------------------------------------------------------|----------------|------------|---------------------|
| Drain-Source Voltage | V_{DS} | 30 | V |
| Gate-Source Voltage | V_{GS} | ± 16 | V |
| Drain Current-Continuous @ $T_J=125^\circ\text{C}$ -Pulsed | I_D | 60 | A |
| | I_{DM} | 180 | A |
| Drain-Source Diode Forward Current | I_S | 60 | A |
| Maximum Power Dissipation @ $T_c=25^\circ\text{C}$ Derate above 25°C | P_D | 75 | W |
| | | 0.5 | W/ $^\circ\text{C}$ |
| Operating and Storage Temperature Range | T_J, T_{STG} | -65 to 175 | $^\circ\text{C}$ |

THERMAL CHARACTERISTICS

| | | | |
|-----------------------------------------|-----------------|------|--------------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 2 | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 62.5 | $^\circ\text{C/W}$ |

CEP6031L/CEB6031L

4

ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise noted)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|----------------------------------------------|---------------------|-------------------------------------------------------------------------------------------------|-----|------|------|------|
| OFF CHARACTERISTICS | | | | | | |
| Drain-Source Breakdown Voltage | BV _{DSS} | V _{GS} =0V, I _D =250μA | 30 | | | V |
| Zero Gate Voltage Drain Current | I _{DSS} | V _{DS} =24V, V _{GS} =0V | | | 10 | μA |
| Gate-Body Leakage | I _{GSS} | V _{GS} =±16V, V _{DS} =0V | | | ±100 | nA |
| ON CHARACTERISTICS^a | | | | | | |
| Gate Threshold Voltage | V _{GS(th)} | V _{DS} =V _{GS} , I _D =250μA | 1 | 1.6 | 3 | V |
| Drain-Source On-State Resistance | R _{DS(on)} | V _{GS} =10V, I _D =26A | | 8.8 | 10 | mΩ |
| | | V _{GS} =4.5V, I _D =21A | | 12 | 15 | mΩ |
| On-State Drain Current | I _{D(on)} | V _{GS} =10V, V _{DS} =10V | 60 | | | A |
| Forward Transconductance | g _{FS} | V _{DS} =10V, I _D =26A | | 32 | | S |
| DYNAMIC CHARACTERISTICS^b | | | | | | |
| Input Capacitance | C _{ISS} | V _{DS} =15V, V _{GS} =0V f=1.0MHz | | 1800 | 2100 | pF |
| Output Capacitance | C _{OSS} | | | 850 | 1200 | pF |
| Reverse Transfer Capacitance | C _{RSS} | | | 440 | 600 | pF |
| SWITCHING CHARACTERISTICS^b | | | | | | |
| Turn-On Delay Time | t _{D(on)} | V _{DD} =15V, I _D =60A, V _{GS} =10V, V _{GEN} =24Ω | | 6 | 16 | ns |
| Rise Time | t _r | | | 120 | 250 | ns |
| Turn-Off Delay Time | t _{D(off)} | | | 40 | 90 | ns |
| Fall Time | t _f | | | 105 | 200 | ns |
| Total Gate Charge | Q _g | V _{DS} =10V, I _D =52A, V _{GS} =10V | | 50 | 60 | nC |
| Gate-Source Charge | Q _{gs} | | | 8 | | nC |
| Gate-Drain Charge | Q _{gd} | | | 8 | | nC |

CEP6031L/CEB6031L

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless otherwise noted)

4

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|--------------------------------------------------------|----------|--------------------------|-----|-----|-----|------|
| DRAIN-SOURCE DIODE CHARACTERISTICS ^a | | | | | | |
| Diode Forward Voltage | V_{SD} | $V_{GS} = 0V, I_s = 26A$ | | 0.9 | 1.3 | V |

Notes

- a. Pulse Test: Pulse Width $\leq 300 \mu s$, Duty Cycle $\leq 2\%$.
- b. Guaranteed by design, not subject to production testing.

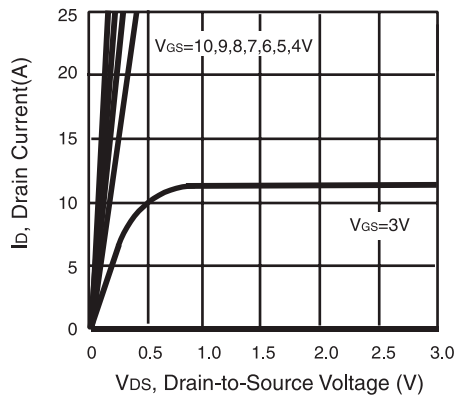


Figure 1. Output Characteristics

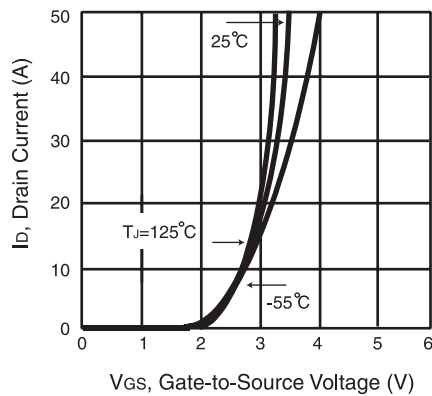


Figure 2. Transfer Characteristics

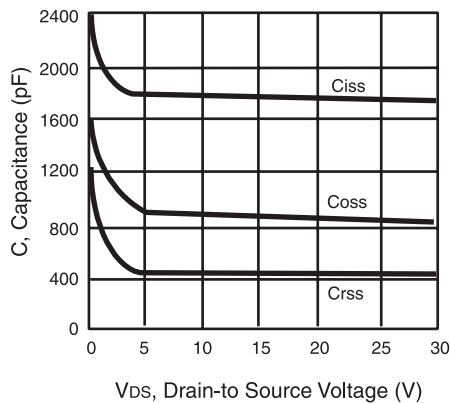


Figure 3. Capacitance

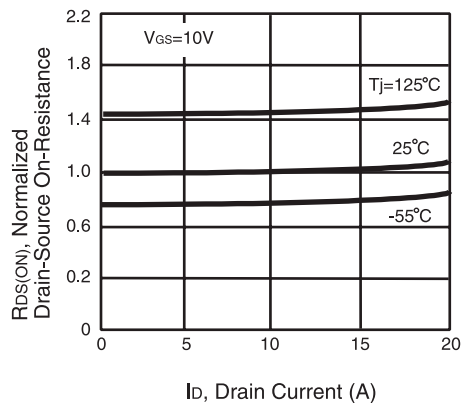


Figure 4. On-Resistance Variation with Drain Current and Temperature

CEP6031L/CEB6031L

4

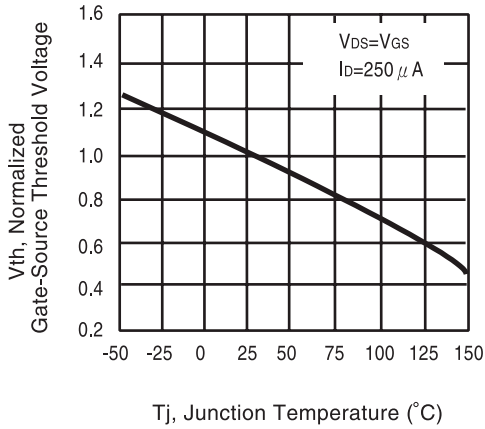


Figure 5. Gate Threshold Variation with Temperature

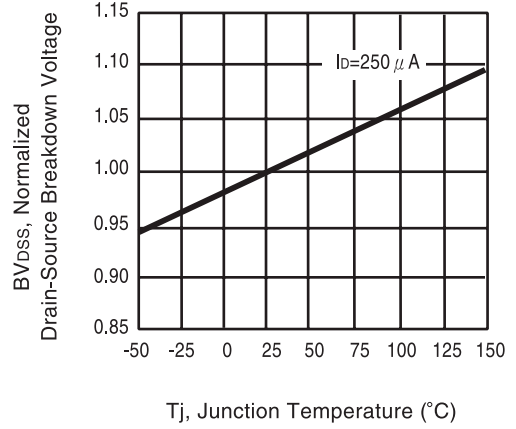


Figure 6. Breakdown Voltage Variation with Temperature

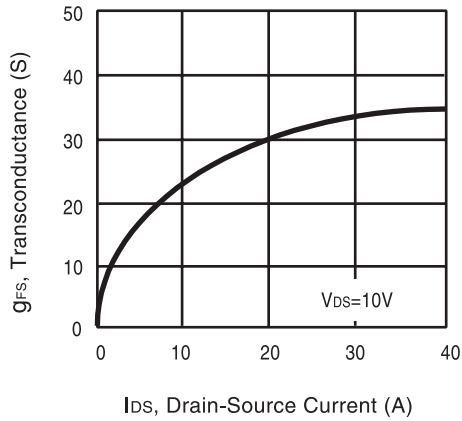


Figure 7. Transconductance Variation with Drain Current

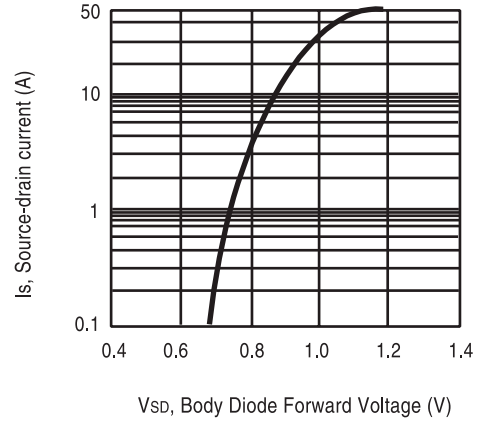


Figure 8. Body Diode Forward Voltage Variation with Source Current

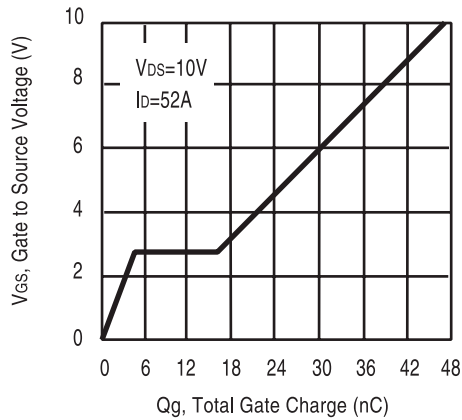


Figure 9. Gate Charge

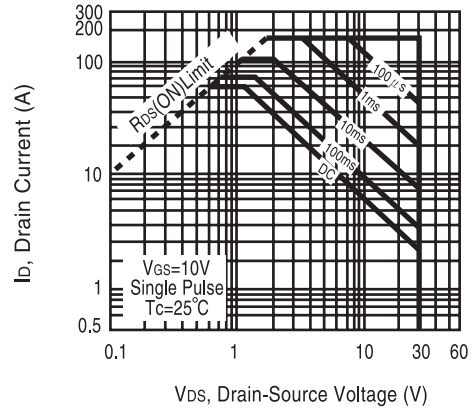


Figure 10. Maximum Safe Operating Area

CEP6031L/CEB6031L

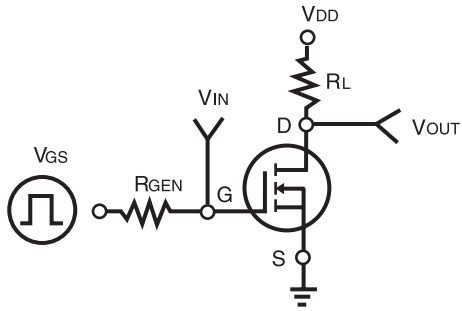


Figure 11. Switching Test Circuit

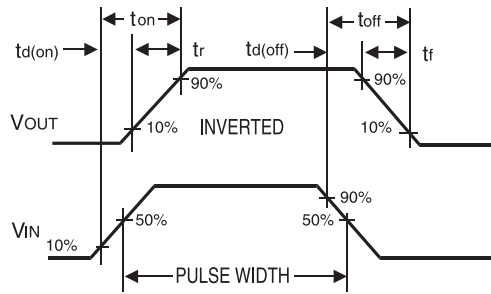


Figure 12. Switching Waveforms

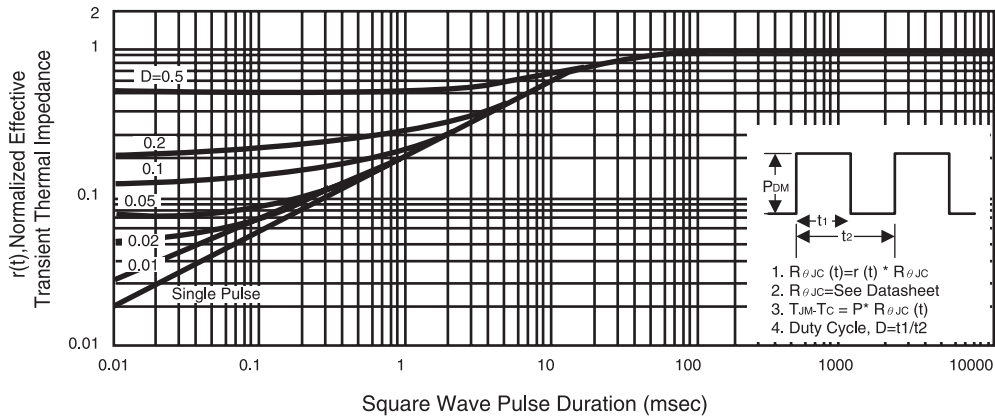


Figure 13. Normalized Thermal Transient Impedance Curve



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.