

MITSUBISHI IGBT MODULES
CM200DY-24NF

HIGH POWER SWITCHING USE

CM200DY-24NF




- IC200A
- VCES 1200V
- Insulated Type
- 2-elements in a pack

APPLICATION

General purpose inverters & Servo controls, etc

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

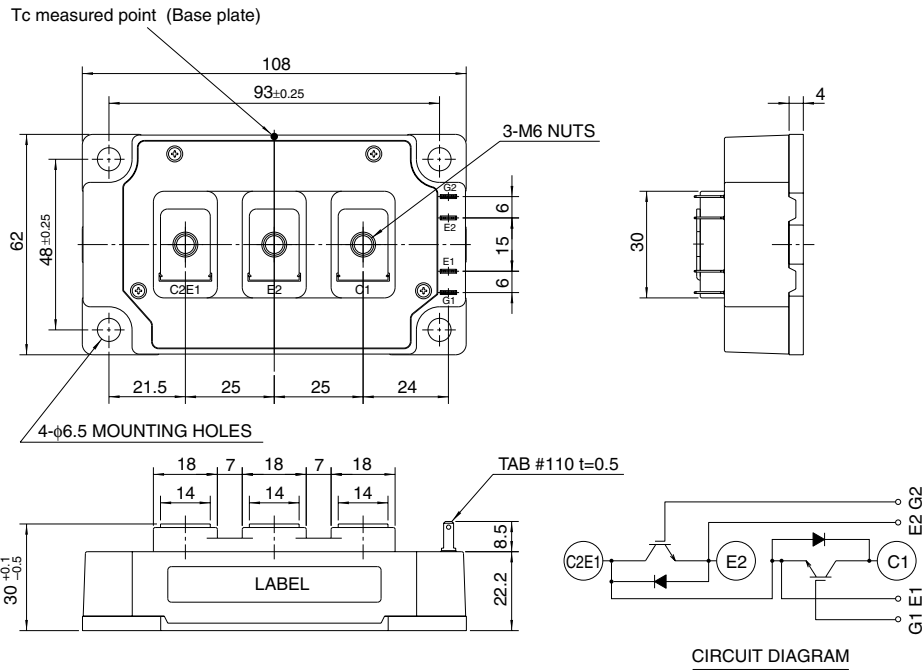

CM200DY-24NF

HIGH POWER SWITCHING USE

MAXIMUM RATINGS (T_J = 25°C)

| Symbol | Parameter | Conditions | Ratings | Unit |
|--------------------------|-------------------------------|--|------------|-------|
| V _{CES} | Collector-emitter voltage | G-E Short | 1200 | V |
| V _{GES} | Gate-emitter voltage | C-E Short | ±20 | V |
| I _C | Collector current | DC, T _c ' = 112°C ^{*3} | 200 | A |
| I _{CM} | | Pulse (Note 2) | 400 | A |
| I _E (Note 1) | Emitter current | | 200 | A |
| I _{EM} (Note 1) | | Pulse (Note 2) | 400 | A |
| P _C (Note 3) | Maximum collector dissipation | T _c = 25°C | 1130 | W |
| T _J | Junction temperature | | -40 ~ +150 | °C |
| T _{stg} | Storage temperature | | -40 ~ +125 | °C |
| V _{iso} | Isolation voltage | Main Terminal to base plate, AC 1 min. | 2500 | V |
| — | Torque strength | Main Terminal M6 | 3.5 ~ 4.5 | N • m |
| — | | Mounting holes M6 | 3.5 ~ 4.5 | N • m |
| — | Weight | Typical value | 400 | g |

ELECTRICAL CHARACTERISTICS (T_J = 25°C)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|--------------------------|--------------------------------------|--|--|------|---------------------|------|
| | | | Min. | Typ. | Max. | |
| I _{CES} | Collector cutoff current | V _{CE} = V _{CES} , V _{GE} = 0V | — | — | 1 | mA |
| V _{GE(th)} | Gate-emitter threshold voltage | I _C = 20mA, V _{CE} = 10V | 6 | 7 | 8 | V |
| I _{GES} | Gate leakage current | V _{GE} = V _{GES} , V _{CE} = 0V | — | — | 0.5 | μA |
| V _{CE(sat)} | Collector-emitter saturation voltage | T _J = 25°C | — | 1.8 | 2.5 | V |
| | | T _J = 125°C | — | 2.0 | — | |
| C _{ies} | Input capacitance | V _{CE} = 10V V _{GE} = 0V | — | — | 47 | nF |
| C _{oes} | Output capacitance | | — | — | 4 | nF |
| C _{res} | Reverse transfer capacitance | | — | — | 0.9 | nF |
| Q _G | Total gate charge | | V _{CC} = 600V, I _C = 200A, V _{GE} = 15V | — | 1350 | — |
| t _{d(on)} | Turn-on delay time | V _{CC} = 600V, I _C = 200A V _{GE1} = V _{GE2} = 15V | — | — | 500 | ns |
| t _r | Turn-on rise time | | — | — | 150 | ns |
| t _{d(off)} | Turn-off delay time | | — | — | 600 | ns |
| t _f | Turn-off fall time | | — | — | 350 | ns |
| t _{rr} (Note 1) | Reverse recovery time | | — | — | 250 | ns |
| Q _{rr} (Note 1) | Reverse recovery charge | I _E = 200A | — | 7.5 | — | μC |
| V _{EC} (Note 1) | Emitter-collector voltage | I _E = 200A, V _{GE} = 0V | — | — | 3.2 | V |
| R _{th(j-c)Q} | Thermal resistance ^{*1} | IGBT part (1/2 module) | — | — | 0.11 | °C/W |
| R _{th(j-c)R} | | FWDi part (1/2 module) | — | — | 0.19 | °C/W |
| R _{th(c-f)} | Contact thermal resistance | Case to fin, Thermal compound Applied ^{*2} (1/2 module) | — | 0.04 | — | °C/W |
| R _{th(j-c)Q} | Thermal resistance | T _c measured point is just under the chips | — | — | 0.066 ^{*3} | °C/W |
| R _G | External gate resistance | | 1.6 | — | 16 | Ω |

*1 : T_c measured point is shown in page OUTLINE DRAWING.

*2 : Typical value is measured by using Shin-etsu Silicone "G-746".

*3 : T_c measured point is just under the chips.

If you use this value, R_{th(f-a)} should be measured just under the chips.

Note 1. I_E, V_{EC}, t_{rr} & Q_{rr} represent characteristics of the anti-parallel, emitter to collector free-wheel diode (FWDi).

2. Pulse width and repetition rate should be such that the device junction temp. (T_J) does not exceed T_{Jmax} rating.


3. Junction temperature (T_J) should not increase beyond 150°C.

CM200DY-24NF


HIGH POWER SWITCHING USE

PERFORMANCE CURVES


OUTPUT CHARACTERISTICS (TYPICAL)

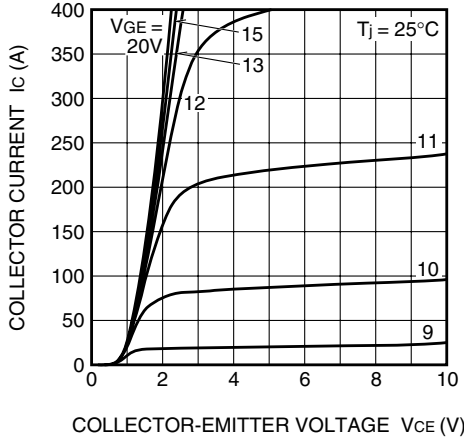


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

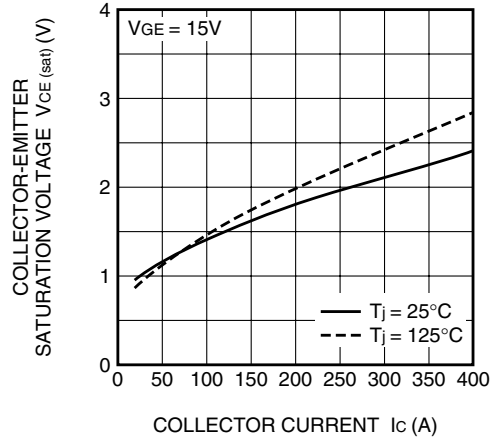


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

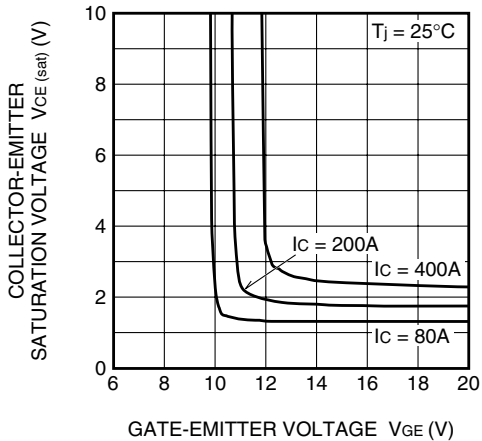


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

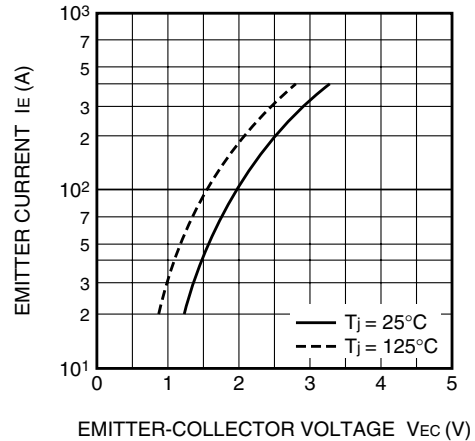

CAPACITANCE-VCE CHARACTERISTICS (TYPICAL)

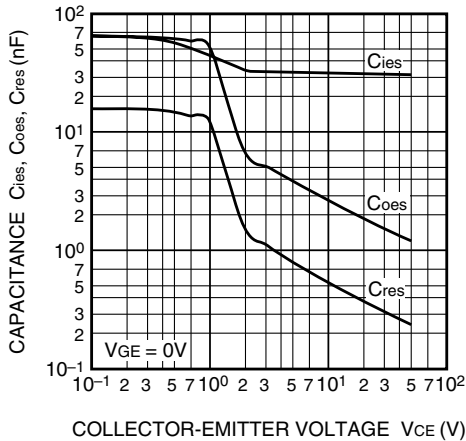


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

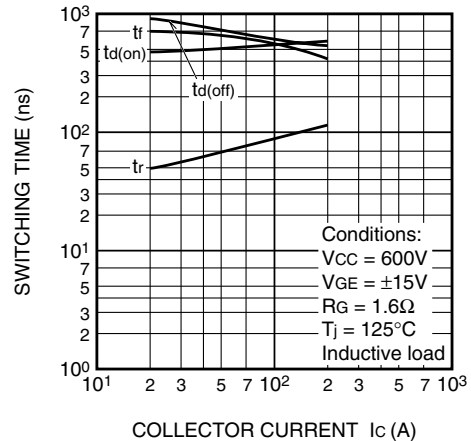


CM200DY-24NF

HIGH POWER SWITCHING USE


REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

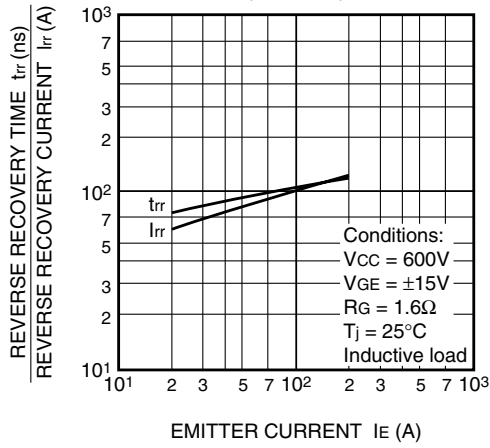

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT part & FWDi part)

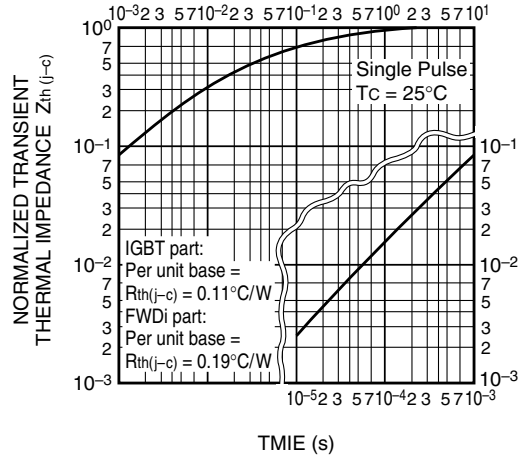

GATE CHARGE CHARACTERISTICS (TYPICAL)

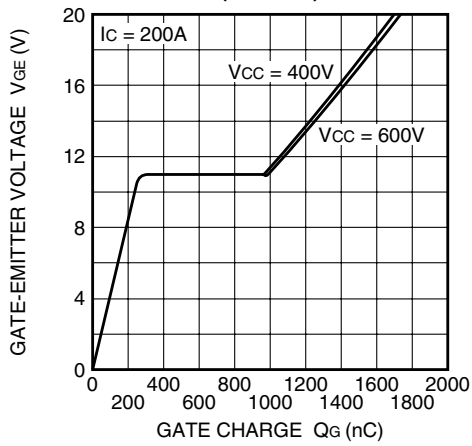

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.