

SPECIFICATION

DEVICE NAME : Power MOSFET

TYPE NAME : 2SK1549-R

SPEC. No. :

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd	
DRAWN				DWG.NO.	1/10
CHECKED					

1. Scope
This specifies Fuji power MOSFET 2SK1549-R
2. Construction N-channel enhancement mode power MOSFET
3. Application for switching
4. Outview TO-3PF Outview See to 4/10 page
5. Absolute maximum ratings at $T_c=25^\circ\text{C}$ (unless otherwise specified)

Description	Symbol	Characteristics	Unit	Remarks
Drain-source voltage	V_{DS}	250	V	
Drain-gate voltage	V_{DGR}	250	V	$R_{GS} = 20\text{K}\Omega$
Continuous Drain current	I_D	± 20	A	
Pulsed drain current	I_{Dpul}	± 80	A	
Gate-source voltage	V_{GS}	± 20	V	
Maximum power dissipation	P_D	80	W	
Operating and storage temperature range	T_{ch}	150	$^\circ\text{C}$	
	T_{stg}	-55 ~ +150	$^\circ\text{C}$	

6. Electrical characteristics at $T_c=25^\circ\text{C}$ (unless otherwise specified)
Static ratings

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Drain-source breakdown voltage	BV_{DSS}	$I_D = 1\text{mA}$ $V_{GS} = 0\text{V}$	250			V
Gate threshold voltage	$V_{GS(th)}$	$I_D = 10\text{mA}$ $V_{DS} = V_{GS}$	2.1	3.0	4.0	V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 250\text{V}$ $V_{GS} = 0\text{V}$	$T_{ch} = 25^\circ\text{C}$	10	500	μA
	I_{DSS}		$T_{ch} = 125^\circ\text{C}$	0.2	1.0	mA
Gate-source leakage current	I_{GSS}	$V_{GS} = \pm 20\text{V}$ $V_{DS} = 0\text{V}$		10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$I_D = 10\text{A}$ $V_{GS} = 10\text{V}$		0.11	0.15	Ω

Fuji Electric Co., Ltd.

DWG. NO.

2/10

Y 0257-R-003a

Dynamic ratings

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Forward transconductance	g_{fs}	$I_D = 10\text{ A}$ $V_{DS} = 25\text{ V}$	8.0	15.0		S
Input capacitance	C_{iss}	$V_{DS} = 25\text{ V}$ $V_{GS} = 0\text{ V}$ $f = 1\text{ MHz}$		2000	3000	pF
Output capacitance	C_{oss}			350	500	pF
Reverse transfer capacitance	C_{rss}			110	200	pF
Turn-on time	$t_{d(on)}$	$V_{CC} = 30\text{ V}$ $V_{GS} = 10\text{ V}$ $I_D = 3\text{ A}$ $R_{GS} = 50\ \Omega$		30	50	ns
	t_r			70	110	ns
Turn-off time	$t_{d(off)}$			400	600	ns
	t_f			120	180	ns

Reverse diode



Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Diode forward on-voltage	V_{SD}	$I_F = 2 \times I_{DR}$ $V_{GS} = 0\text{ V}$, $T_{ch} = 25^\circ\text{C}$		1.0	1.7	V
Reverse recovery time	t_{rr}	$I_F = I_{DR}$ $V_{GS} = 0\text{ V}$ $-di_F/dt = 100\text{ A}/\mu\text{s}$ $T_{ch} = 25^\circ\text{C}$		250		ns
Reverse recovery charge	Q_{rr}			2		μC

7. Thermal resistance

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance	$R_{th_{ch-c}}$				1.56	$^\circ\text{C}/\text{W}$
	$R_{th_{ch-a}}$				30.0	$^\circ\text{C}/\text{W}$

FUJI POWER MOSFET

TYPE : 2SK1549-R

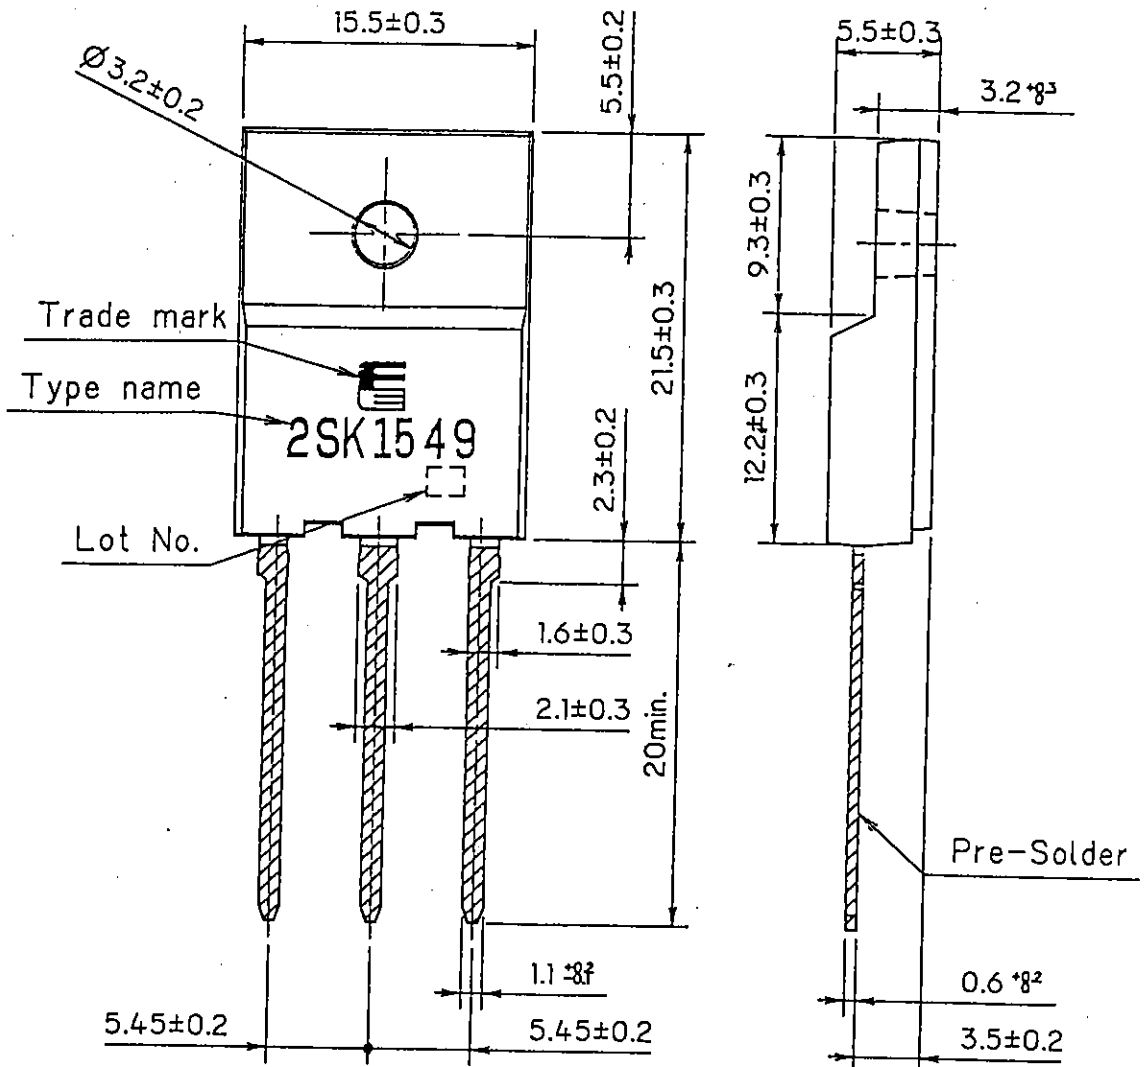

CONNECTION

- ① GATE
- ② DRAIN
- ③ SOURCE

DIMENSIONS ARE IN MILLIMETERS.


Fuji Electric Co., Ltd

DWG. NO.


4/10

Y 0257-R-003a

Power Dissipation
 $PD=f(TC)$

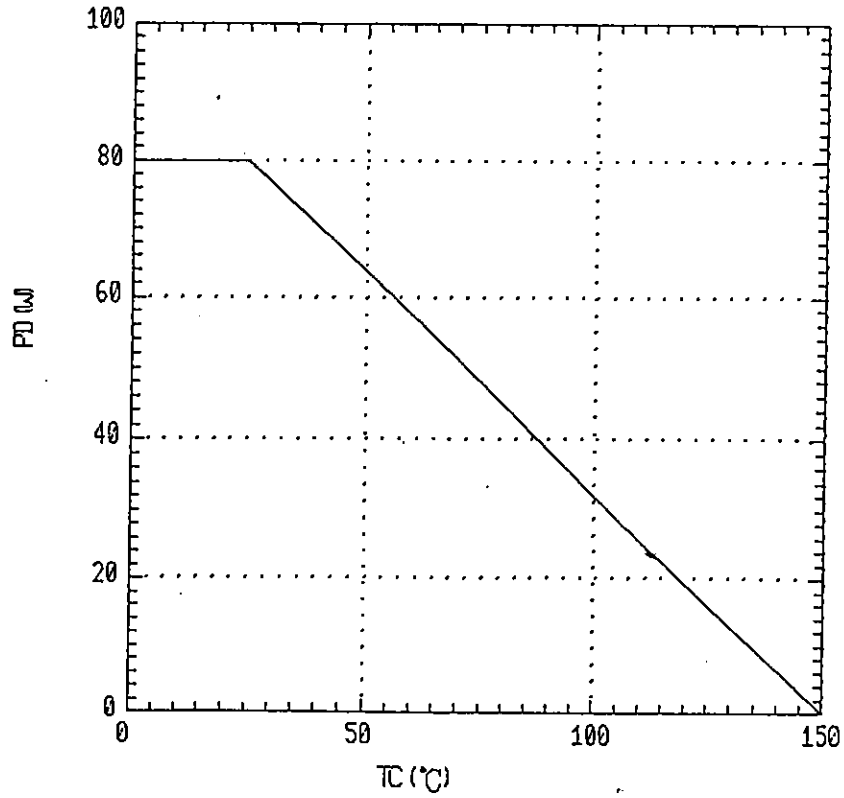

Safe operating area
 $ID=f(VDS): D=0.01, Tc=25^{\circ}C$

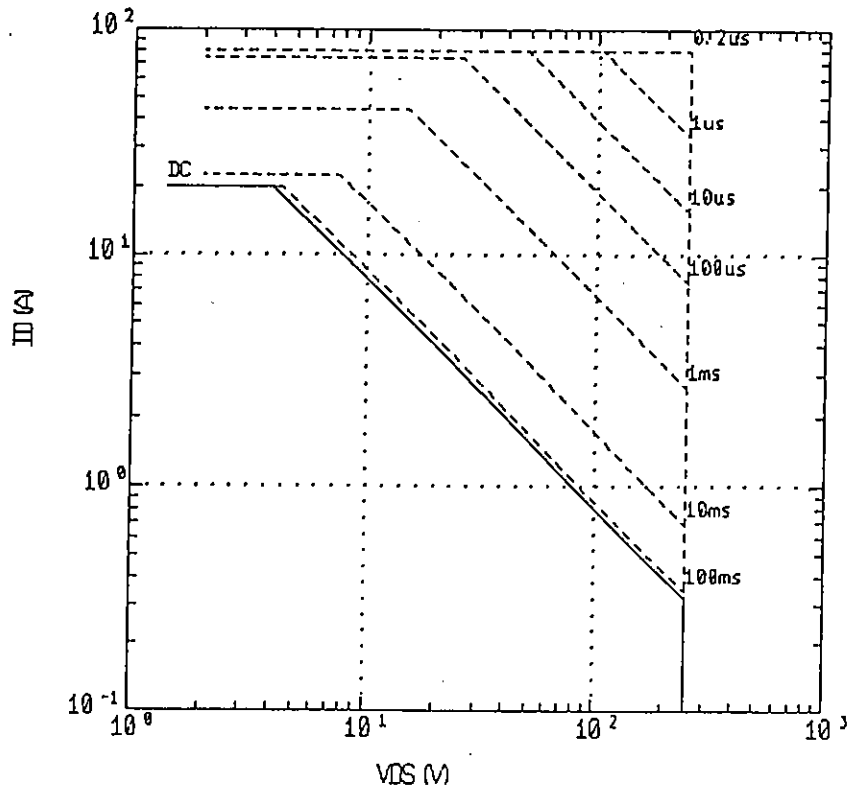


Fuji Electric Co., Ltd.

DWG. NO.


5/10

Y 0257-R-003a

Typical output characteristics
 $I_D = f(V_{DS})$: 80 μ s pulse test, $T_{ch} = 25^\circ\text{C}$

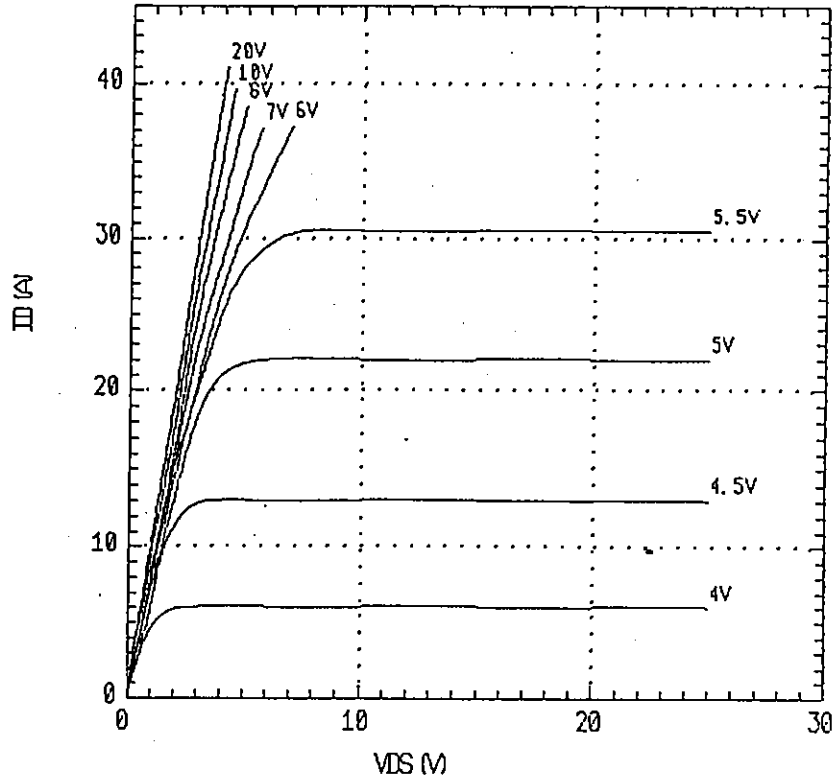

Typical Transfer Characteristic
 $I_D = f(V_{GS})$: 80 μ s pulse test, $V_{DS} = 25\text{V}$, $T_{ch} = 25^\circ\text{C}$

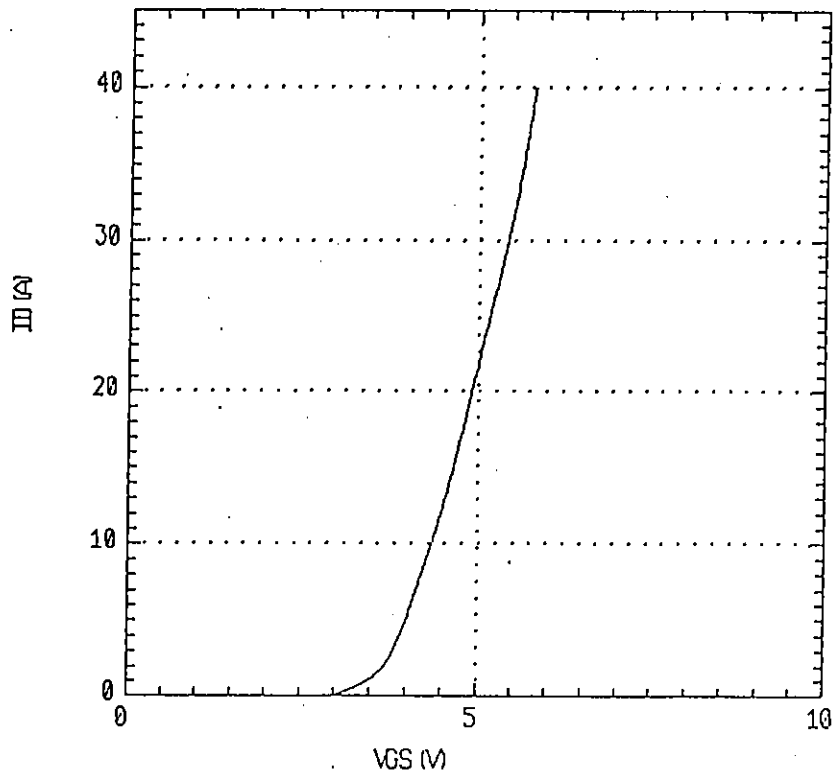


Fuji Electric Co., Ltd.

DWG. NO.


6/10

Y 0257-R-003a


Typical Transconductance
 $g_{fs}=f(I_D): 80\mu s$ pulse test, $V_{DS}=25V, T_{ch}=25^\circ C$

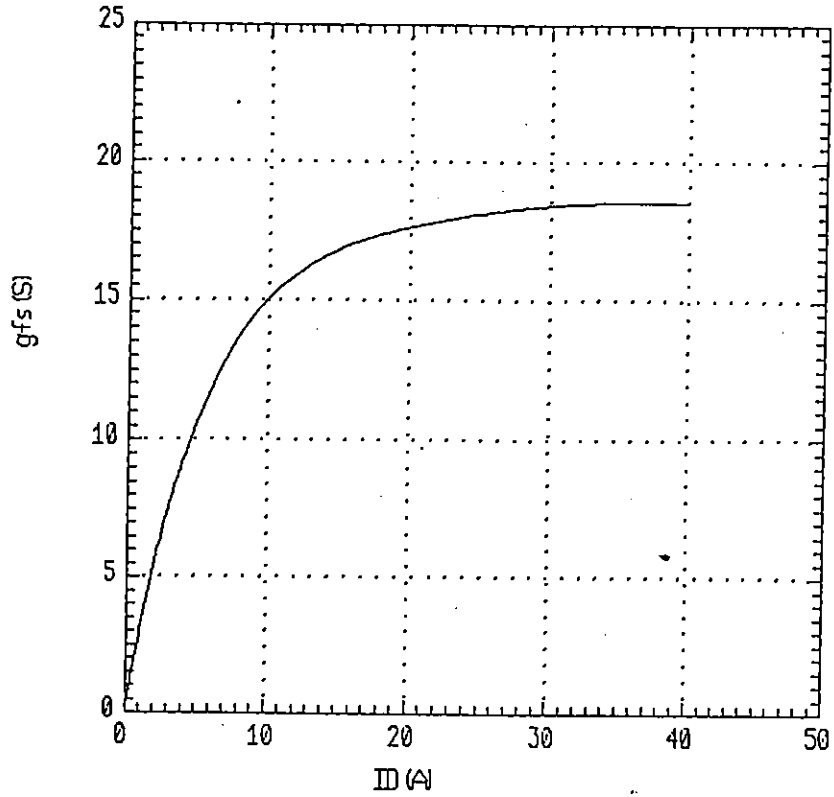


Typical Drain-source on-state resistance
 $R_{DS(on)}=f(I_D): 80\mu s$ pulse test, $T_{ch}=25^\circ C$

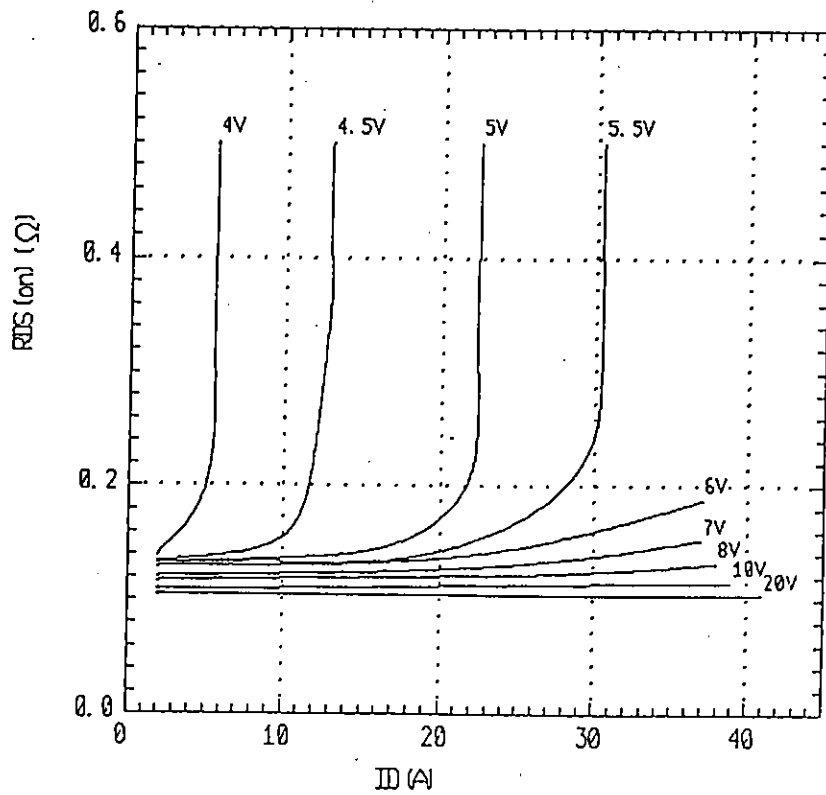

Drain-source on-state resistance
 $R_{DS(on)} = f(T_{ch}) : I_D = 10A, V_{GS} = 10V$

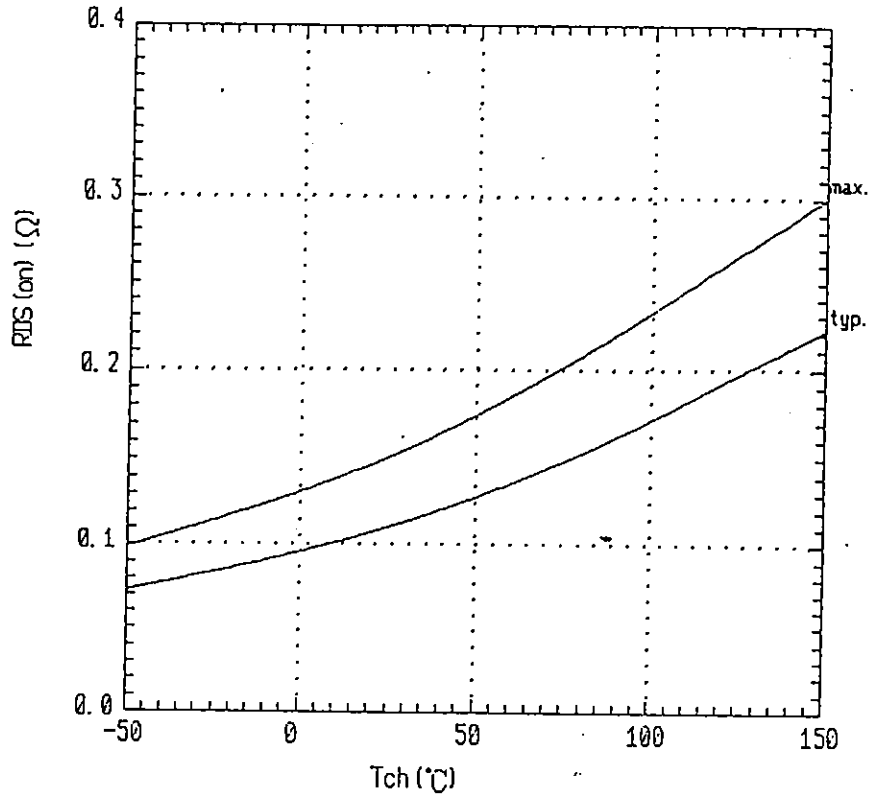

Gate threshold voltage
 $V_{GS(th)} = f(T_{ch}) : V_{DS} = V_{GS}, I_D = 10mA$

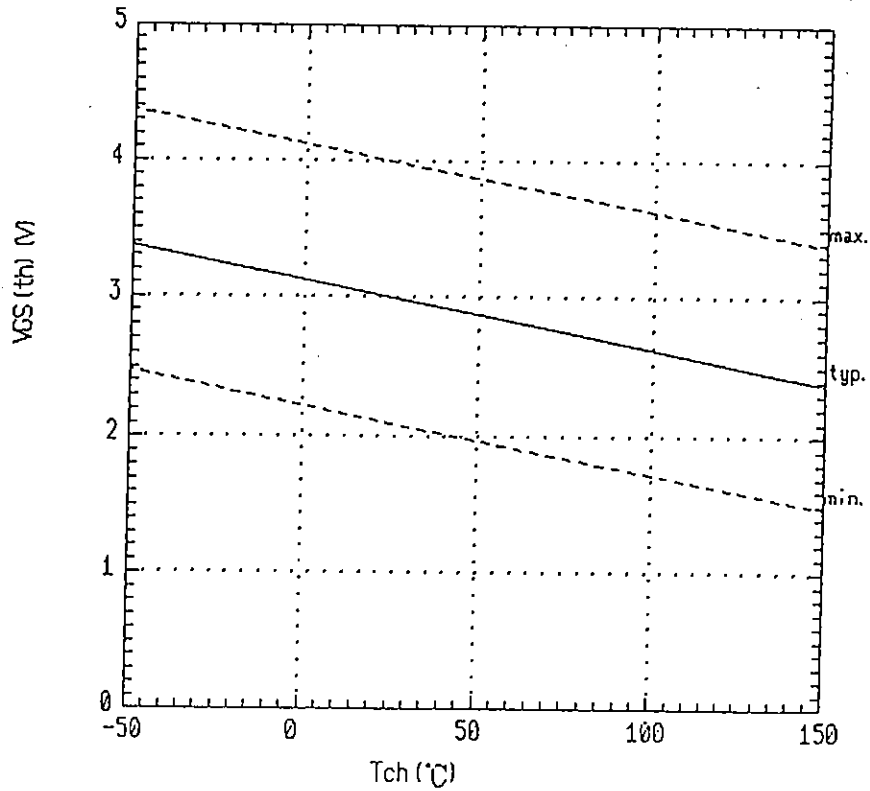


Fuji Electric Co., Ltd.

DWG. NO.


8/10

Y 0257-R-003a

Typical gate charge characteristics
 $V_{GS} = f(Q_g) : I_D = 20A, T_{ch} = 25^\circ C$

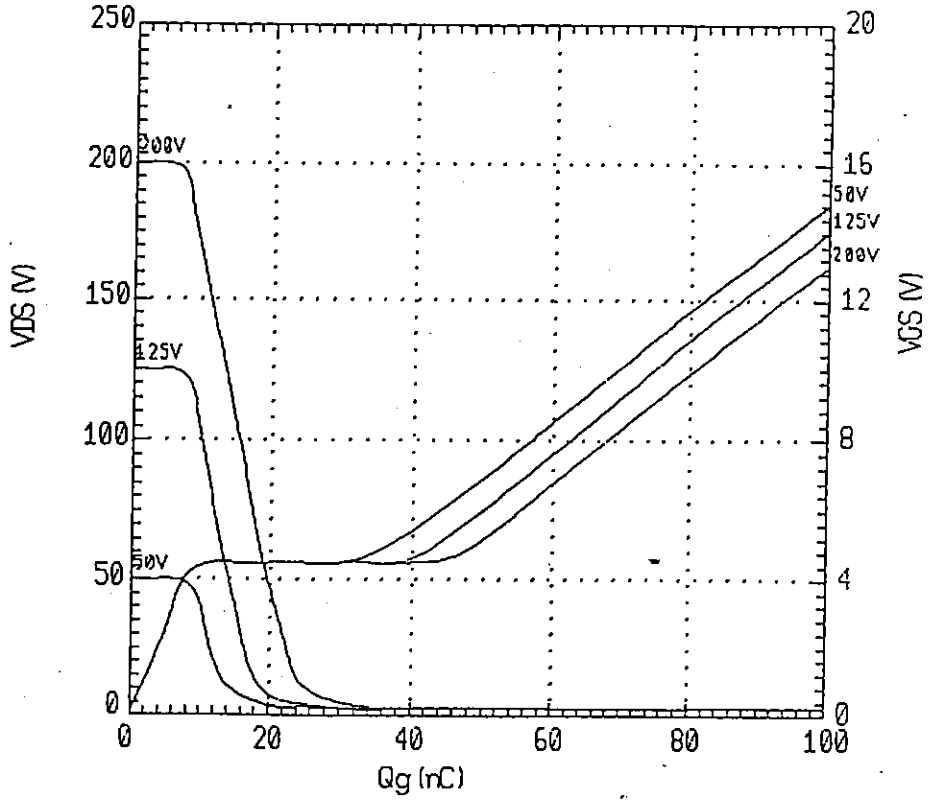

Typical capacitances
 $C = f(V_{DS}) : V_{GS} = 0V, f = 1MHz$

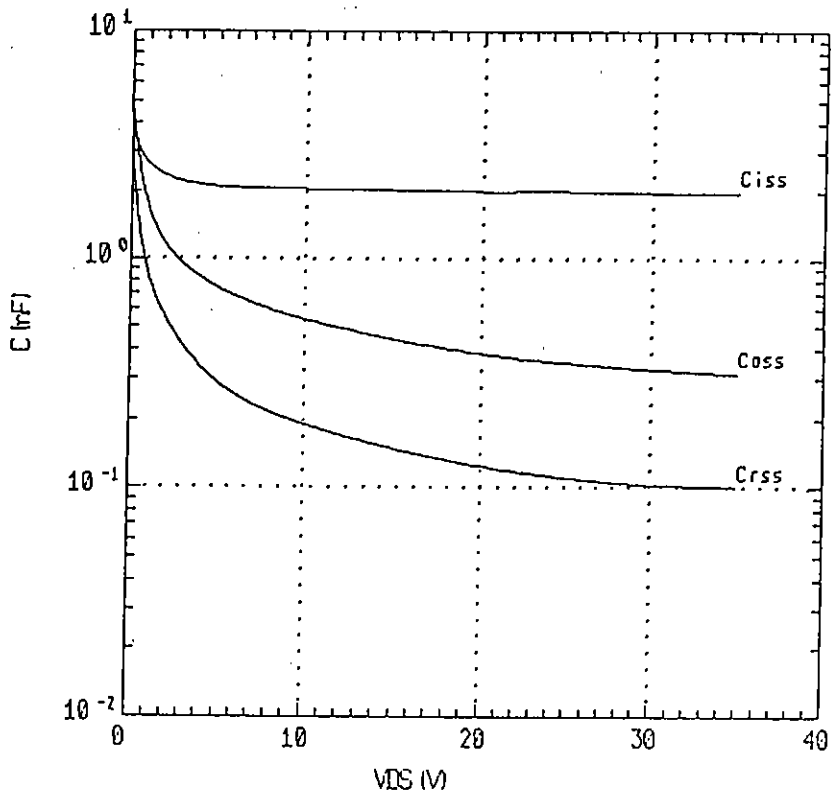


Fuji Electric Co., Ltd.

DWG. NO.


9/10

Y 0257-R-003a

Forward characteristic of reverse diode
 $I_F = f(V_{SD}) : 80 \mu s$ pulse test, $V_{GS} = 0V$

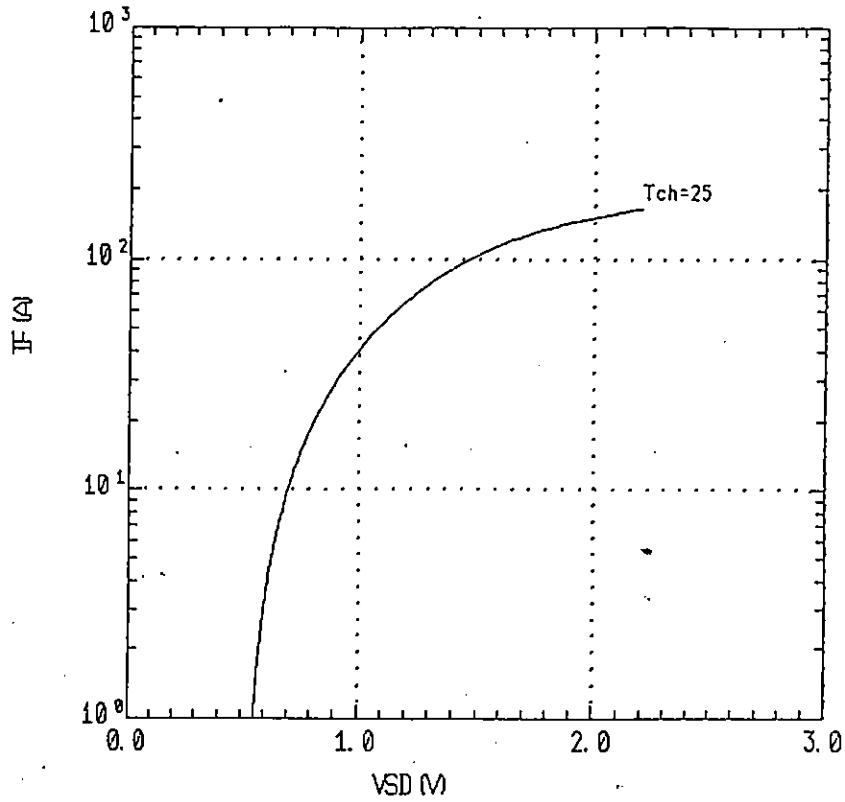

Transient thermal impedance $Z_{thch-c} = f(t)$ parameter: $D = t/T$

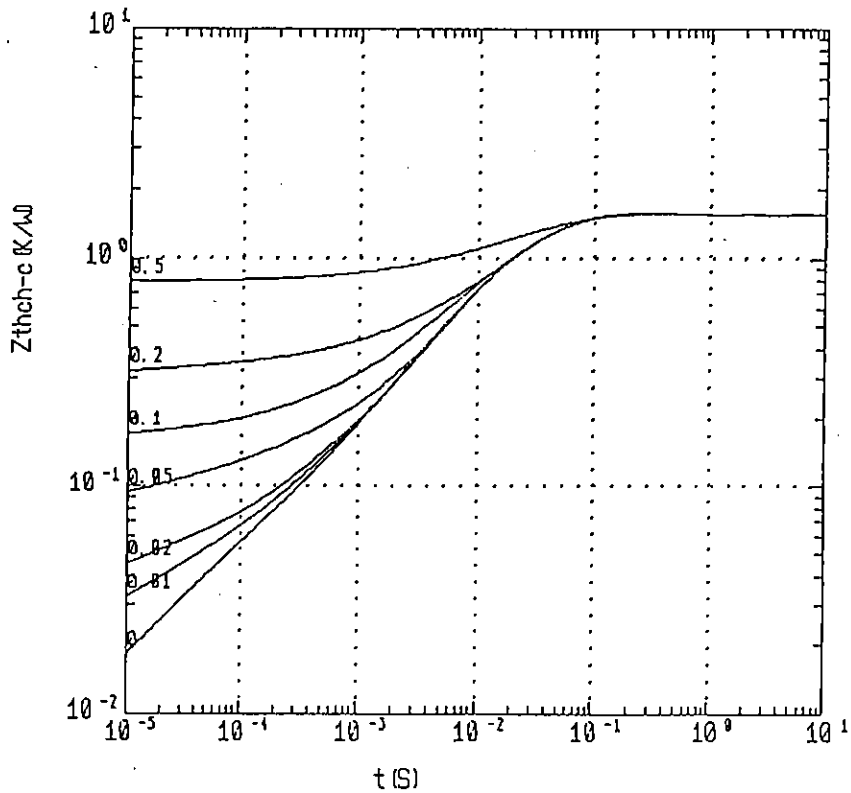

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.