

CP800 THRU CP808

SINGLE-PHASE SILICON BRIDGE

VOLTAGE - 50 to 800 Volts CURRENT - P.C. MTG 3A, HEAT-SINK MTG 8A

CP-8

FEATURES

- Surge overload rating—200 Amperes peak
- Low forward voltage drop and reverse leakage
- Small size, simple installation
- Plastic package has Underwriter Laboratory Flammability Classification 94V-O
- Reliable low cost construction utilizing molded plastic technique

MECHANICAL DATA


Mounting position: Any

Weight: 0.24 ounce, 6.9 grams

Terminals: Leads solderable per MIL-STD-202,

Method 208

Mounting torque: Thro hole for #6 screw

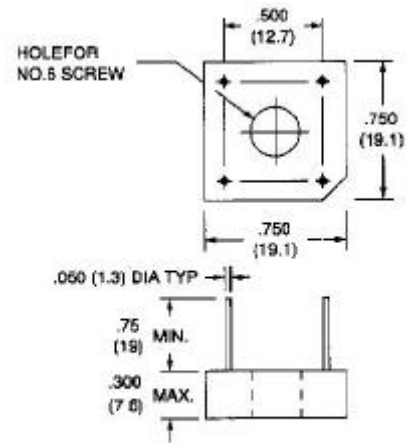

Dimensions in inches and (millimeters)

MACXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

At 25 ambient temperature unless otherwise noted; resistive or inductive load at 60Hz .

	CP800	CP801	CP802	CP804	CP806	CP808	UNITS
Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	V
Max Bridge Input Voltage RMS	35	70	140	280	420	560	V
Max Average Rectified Output at $T_C=50$ * See Fig. 2 at $T_A=40$ **	8.0						A
	3.0						A
Peak One Cycle Surge Overload Current	200						A
Max Forward Voltage Drop per element at 4.0A DC & 25 . See Fig. 3	1.1						V
Max Rev Leakage at rated Dc Blocking Voltage per element at 25 See Fig 4 at 100	10.0						A
	1.0						mA
I ² t Rating for fusing (t<8.3ms)	166						A ² Sec
Typical junction capacitance per leg (Note 4) C _J	200						pF
Typical Thermal Resistance per leg (Note 3) R _{JA}	21						/W
Typical Thermal Resistance per leg (Note 2) R _{JL}	6						
Operating Temperature Range	-55 TO +125						
Storage Temperature Range	-55 TO +150						

NOTES:

1. Bolt down on heat-sink with silicon thermal compound between bridge and mounting surface for maximum heat transfer with #6 screw.
2. Units Mounted on a 8.6"×8.6" ×24" thick (22×22×0.6cm) AL plate heatsink.
3. Units Mounted on P.C.B at 0.375"(9.5mm) lead length with 0.5×0.5"(12×12mm)copper pads.

4. Measured at 1.0MHZ and applied reverse voltage.

RATING AND CHARACTERISTIC CURVES

CP800 THRU CP808

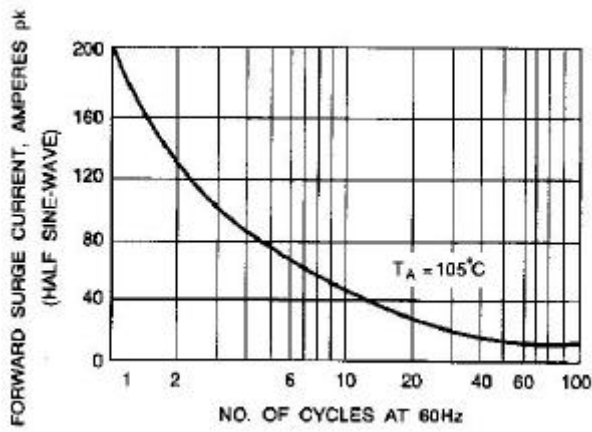


Fig. 1-NON-RECURRENT SURGE RATING

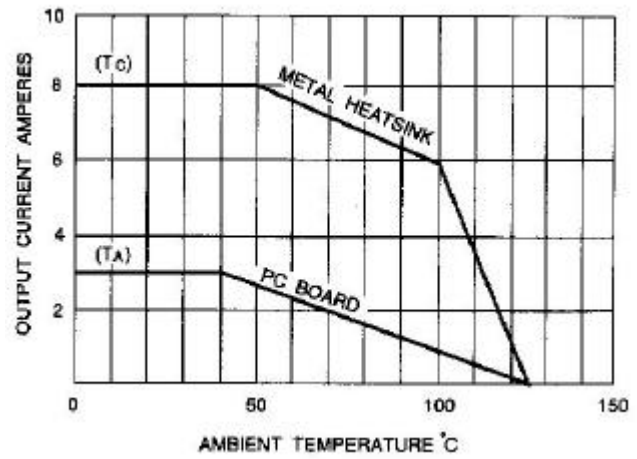


Fig. 2-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

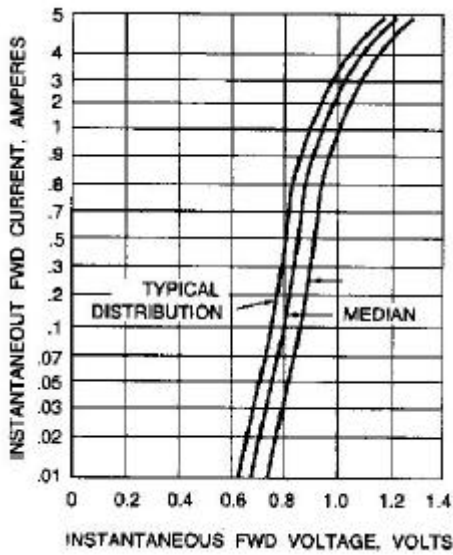


Fig. 3-TYPICAL FORWARD CHARACTERISTICS

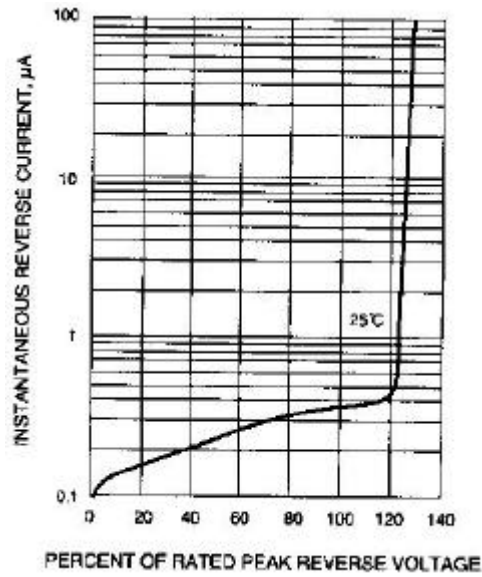


Fig. 4- TYPICAL REVERSE CHARACTERISTICS

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.