

**CLL4448**  
**HIGH SPEED**  
**SWITCHING DIODE**



**SOD-80 CASE**

**Central™**  
**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CLL4448 type is a ultra-high speed silicon switching diode manufactured by the epitaxial planar process, in a hermetically sealed glass surface mount package, designed for high speed switching applications.

**Marking Code: Cathode Band.**


**MAXIMUM RATINGS** ( $T_A=25^{\circ}\text{C}$ )

	<b>SYMBOL</b>		<b>UNITS</b>
Continuous Reverse Voltage	$V_R$	75	V
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	V
Continuous Forward Current	$I_F$	250	mA
Peak Repetitive Forward Current	$I_{FRM}$	250	mA
Forward Surge Current, $t_p=1 \mu\text{sec.}$	$I_{FSM}$	4000	mA
Forward Surge Current, $t_p=1 \text{sec.}$	$I_{FSM}$	1000	mA
Power Dissipation	$P_D$	500	mW
Operating and Storage			
Junction Temperature	$T_J, T_{stg}$	-65 to +200	$^{\circ}\text{C}$
Thermal Resistance	$\theta_{JA}$	350	$^{\circ}\text{C/W}$

**ELECTRICAL CHARACTERISTICS** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>	<b>MAX</b>	<b>UNITS</b>
$V_{BR}$	$I_R=5.0\mu\text{A}$	75		V
$V_{BR}$	$I_R=100\mu\text{A}$	100		V
$I_R$	$V_R=20\text{V}$		25	mA
$V_F$	$I_F=5.0\text{mA}$	0.62	0.72	V
$V_F$	$I_F=100\text{mA}$		1.0	V
$C_T$	$V_R=0, f=1 \text{MHz}$		4.0	pF
$t_{rr}$	$I_R=I_F=10\text{mA}, R_L=100\Omega, \text{Rec. to } 1.0\text{mA}$		4.0	ns

All dimensions in inches (mm).

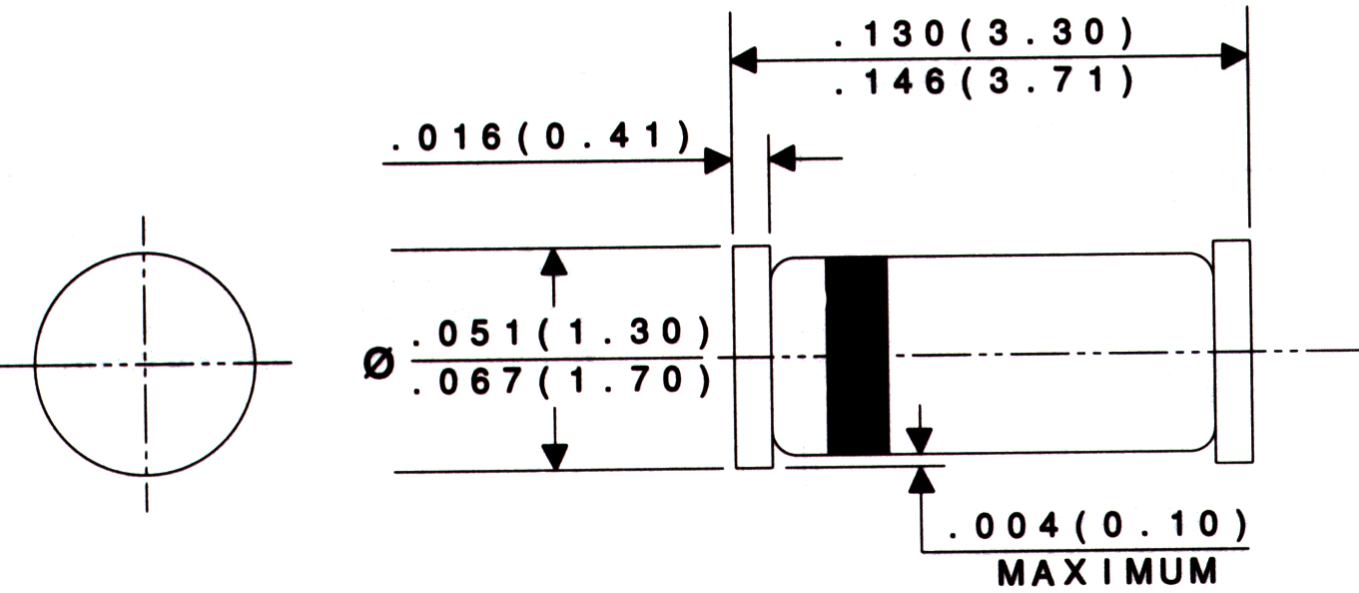



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.