


Features

- Extremely Low On-Resistance:
170mΩ @ $V_{GS} = 4.5V$
- High Drain Current: 1.1A
- Ideal for Notebook Computer, Portable Phone, PCMCIA Cards, and Battery Powered Circuits

Mechanical Data

- Case: SC-59, Molded Plastic
- Case Material - UL Flammability Rating Classification 94V-0
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagrams
- Weight: 0.008 grams (approx.)
- Ordering Information, See Sheet 2

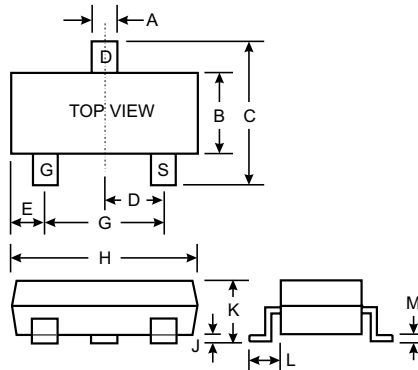

SC-59		
Dim	Min	Max
A	0.30	0.50
B	1.40	1.80
C	2.50	3.00
D	0.85	1.05
E	0.30	0.70
G	1.70	2.10
H	2.70	3.10
J	—	0.10
K	1.00	1.40
L	0.55	0.70
M	0.10	0.35
All Dimensions in mm		

Maximum Ratings @ $T_A = 25^\circ C$ unless otherwise specified

Characteristic	Symbol	DMN100	Units
Drain-Source Voltage	V_{DSS}	30	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current	I_D	± 1.1 ± 4.0	A
Total Power Dissipation	P_d	500	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	250	K/W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ C$

Notes: 1. Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 1)						
Drain-Source Breakdown Voltage	BV _{DSS}	30	—	—	V	V _{GS} = 0V, I _D = 250μA
Zero Gate Voltage Drain Current	I _{DSS}	—	—	1.0 10	μA	V _{DS} = 24V, V _{GS} = 0V @ T _j = 25°C @ T _j = 125°C
Gate-Body Leakage	I _{GSS}	—	—	± 100	nA	V _{GS} = ± 12V, V _{DS} = 0V
ON CHARACTERISTICS (Note 1)						
Gate Threshold Voltage	V _{GS(th)}	1.0	—	3.0	V	V _{DS} = 10V, I _D = 1.0mA
Static Drain-Source On-Resistance	R _{DS(on)}	—	—	0.170 0.240	Ω	V _{GS} = 4.5V, I _D = 0.5A V _{GS} = 10V, I _D = 1.0A
Forward Transconductance	g _{FS}	1.3	2.4	—	S	V _{DS} = 10V, I _D = 0.5A
DYNAMIC CHARACTERISTICS						
Input Capacitance	C _{iss}	—	150	—	pF	V _{DS} = 10V, V _{GS} = 0V f = 1.0MHz
Output Capacitance	C _{oss}	—	90	—	pF	
Reverse Transfer Capacitance	C _{rss}	—	30	—	pF	
Total Gate Charge	Q _g	—	5.5	—	nC	V _{DS} = 24V, I _D = 1.0A, V _{GS} = 10V
Gate-to-Source Charge	Q _{gs}	—	0.8	—	nC	
Gate-to-Drain Charge	Q _{gd}	—	1.3	—	nC	
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{D(ON)}	—	10	—	ns	V _{DD} = 10V, I _D = 0.5A, V _{GS} = 5.0V, R _{GEN} = 50Ω
Turn-Off Delay Time	t _{D(OFF)}	—	25	—	ns	
Turn-On Rise Time	t _r	—	15	—	ns	
Turn-Off Fall Time	t _f	—	45	—	ns	
SOURCE- DRAIN RATINGS (BODY DIODE)						
Continuous Source Current	I _S	—	—	0.54	A	—
Pulse Source Current	I _{SM}	—	—	4.0	A	—
Forward Voltage	V _{SD}	—	—	1.2	V	I _F = 1.0A, V _{GS} = 0V
Reverse Recovery Time	t _{rr}	—	35	—	ns	I _F = 1.0A, di/dt = 50A/μs


Notes: 1. Pulse width ≤ 300μs, duty cycle ≤ 2%.

Ordering Information (Note 2)

Device	Packaging	Shipping
DMN100-7	SC-59	3000/Tape & Reel

Notes: 2. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



XXX = Product Type Marking Code
 X = Assembly Lot No.
 [0-9, A-Z, except G, I, J, O, Q, W]

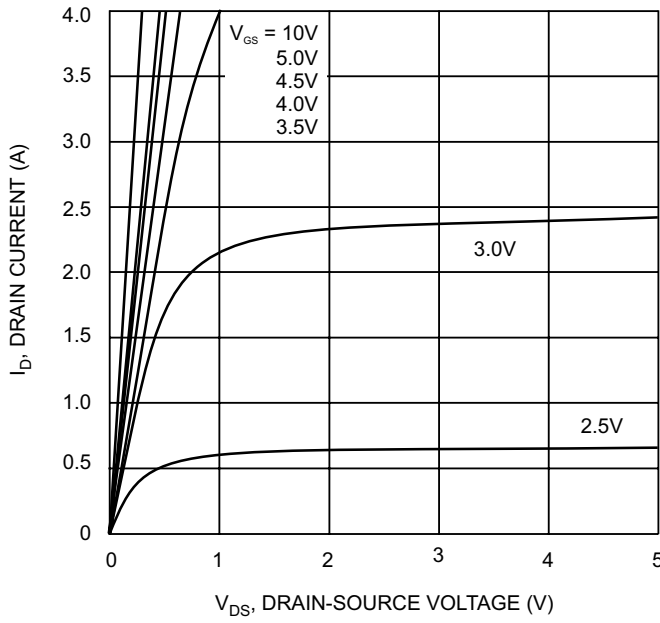


Fig. 1 On-Region Characteristics

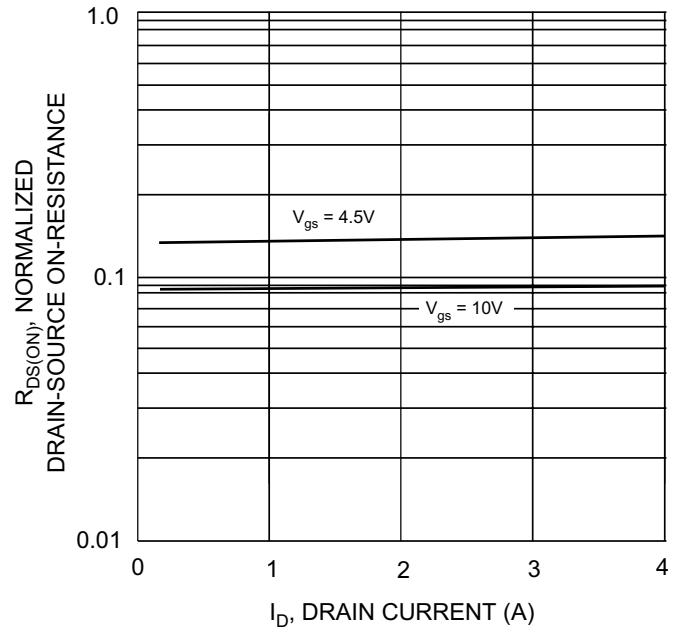


Fig. 2 On-Resistance vs Drain Current

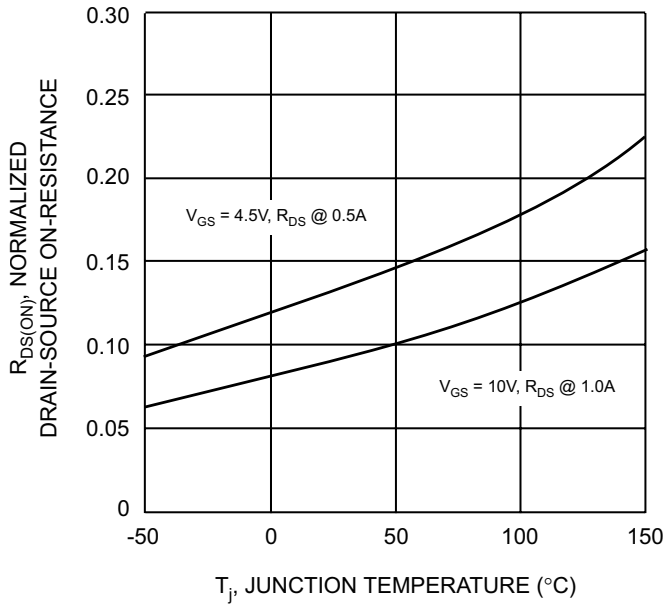


Fig. 3 On-Resistance vs Junction Temperature

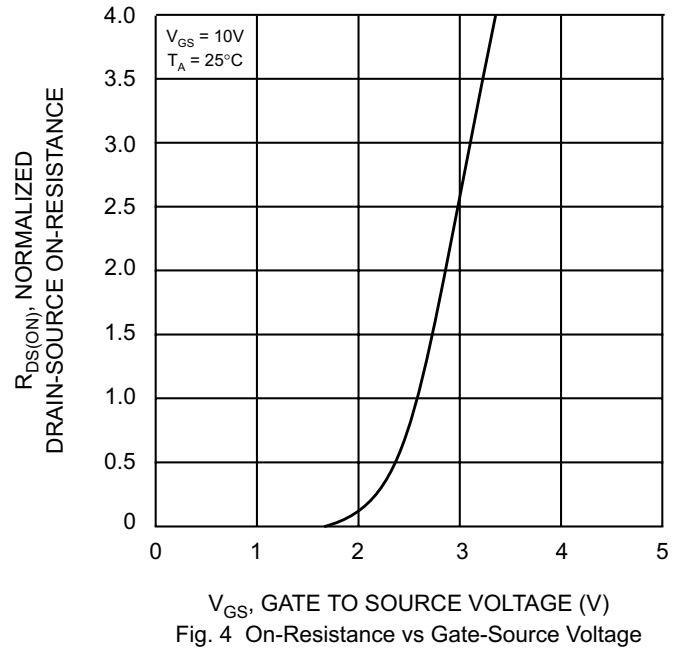


Fig. 4 On-Resistance vs Gate-Source Voltage



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.