

NPN PRE-BIASED SMALL SIGNAL SOT-363 DUAL SURFACE MOUNT TRANSISTOR


NEW PRODUCT

Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDA)
- Built-In Biasing Resistors
- Also Available in Lead Free Version


Mechanical Data

- Case: SOT-363, Molded Plastic
- Moisture sensitivity: Level 1 per J-STD-020A
- Case material - UL Flammability Rating 94V-0
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 3
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 3)
- Weight: 0.006 grams (approx.)
- Ordering Information (See Page 3)

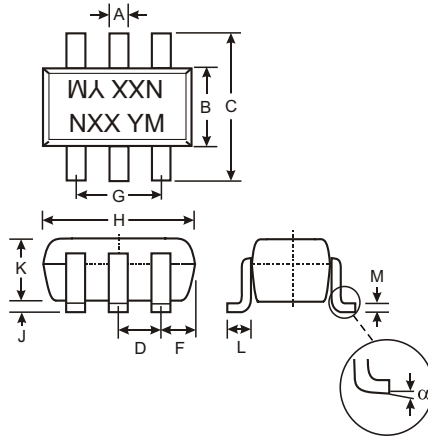

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
α	0°	8°
All Dimensions in mm		

P/N	R1	R2	MARKING
DDC124EU	22KΩ	22KΩ	N17
DDC144EU	47KΩ	47KΩ	N20
DDC114YU	10KΩ	47KΩ	N14
DDC123JU	2.2KΩ	47KΩ	N06
DDC114EU	10KΩ	10KΩ	N13
DDC143TU	4.7KΩ	-	N07
DDC114TU	10KΩ	-	N12

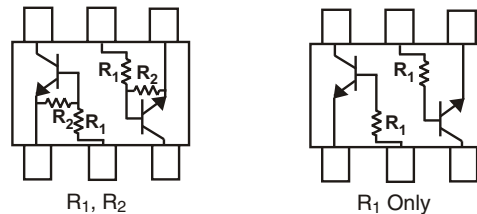

SCHEMATIC DIAGRAM

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage, (3) to (1)	V _{CC}	50	V
Input Voltage, (2) to (1)	V _{IN}	-10 to +40 -10 to +40 -6 to +40 -5 to +12 -10 to +40 -5 V _{max} -5 V _{max}	V
Output Current	I _O	30 30 70 100 50 100 100	mA
Output Current	I _C (Max)	100	mA
Power Dissipation (Total)	P _d	200	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	625	°C/W
Operating and Storage and Temperature Range	T _J , T _{STG}	-55 to +150	°C

Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
2. 150mW per element must not be exceeded.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic (DDC143TU & DDC114TU only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV _{CBO}	50	—	—	V	I _C = 50μA
Collector-Emitter Breakdown Voltage	BV _{CEO}	50	—	—	V	I _C = 1mA
Emitter-Base Breakdown Voltage	BV _{EBO}	5	—	—	V	I _E = 50μA
Collector Cutoff Current	I _{CBO}	—	—	0.5	μA	V _{CB} = 50V
Emitter Cutoff Current	I _{EBO}	—	—	0.5	μA	V _{EB} = 4V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	—	—	0.3	V	I _C /I _B = 2.5mA / 0.25mA I _C /I _B = 1mA / 0.1mA DDC143TU DDC114TU
DC Current Transfer Ratio	h _{FE}	100	250	600	—	I _C = 1mA, V _{CE} = 5V
Input Resistor (R ₁) Tolerance	ΔR ₁	-30	—	+30	%	—
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = 10V, I _E = -5mA, f = 100MHz

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	V _{I(off)}	0.5 0.5 0.3 0.5 0.5	1.1 1.1 — — 1.1	—	V	V _{CC} = 5V, I _O = 100μA
	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	V _{I(on)}	—	1.9 1.9 — — 1.9	3.0 3.0 1.4 1.1 3.0		
Output Voltage	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	V _{O(on)}	—	0.1	0.3	V	I _O /I _I = 10mA / 0.5mA I _O /I _I = 10mA / 0.5mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 10mA / 0.5mA
Input Current	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	I _I	—	—	0.36 0.18 0.88 3.6 0.88	mA	V _I = 5V
Output Current		I _{O(off)}	—	—	0.5	μA	V _{CC} = 50V, V _I = 0V
DC Current Gain	DDC124EU DDC144EU DDC114YU DDC123JU DDC114EU	G _I	56 68 68 80 30	—	—	—	V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 5mA
Input Resistor (R ₁) Tolerance		ΔR ₁	-30	—	+30	%	—
Resistance Ratio Tolerance		R ₂ /R ₁	-20	—	+20	%	—
Gain-Bandwidth Product*		f _T	—	250	—	MHz	V _{CE} = 10V, I _E = 5mA, f = 100MHz


* Transistor - For Reference Only

Ordering Information (Note 3)

Device	Packaging	Shipping
DDC124EU-7	SOT-363	3000/Tape & Reel
DDC144EU-7	SOT-363	3000/Tape & Reel
DDC114YU-7	SOT-363	3000/Tape & Reel
DDC123JU-7	SOT-363	3000/Tape & Reel
DDC114EU-7	SOT-363	3000/Tape & Reel
DDC143TU-7	SOT-363	3000/Tape & Reel
DDC114TU-7	SOT-363	3000/Tape & Reel

- Notes:
- For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
 - For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to part number above.
Example: DDC114TU-7-F.

Marking Information



NXX = Product Type Marking Code
See Sheet 1 Diagrams
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDC123JK
ONE SECTION

NEW PRODUCT

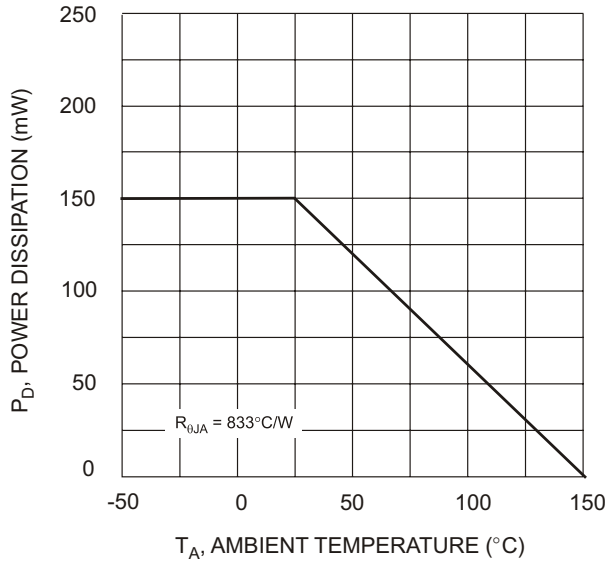


Fig. 1 Derating Curve

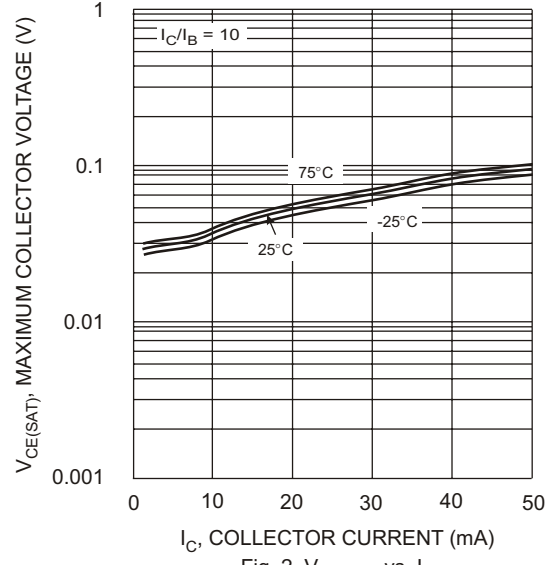


Fig. 2 $V_{CE(SAT)}$ vs. I_C

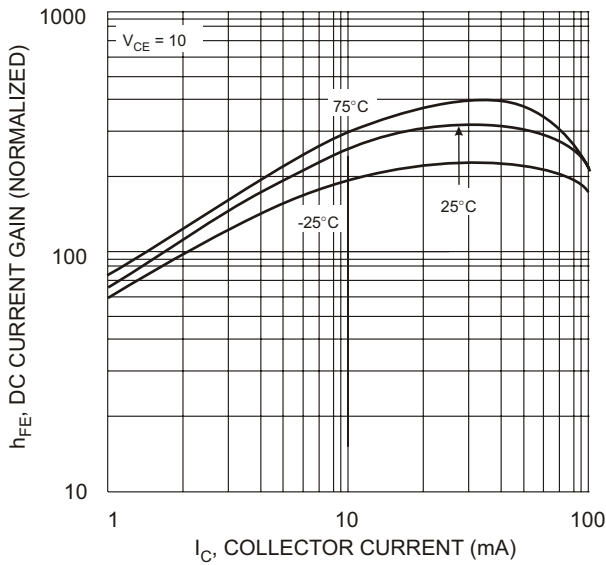


Fig. 3 DC Current Gain

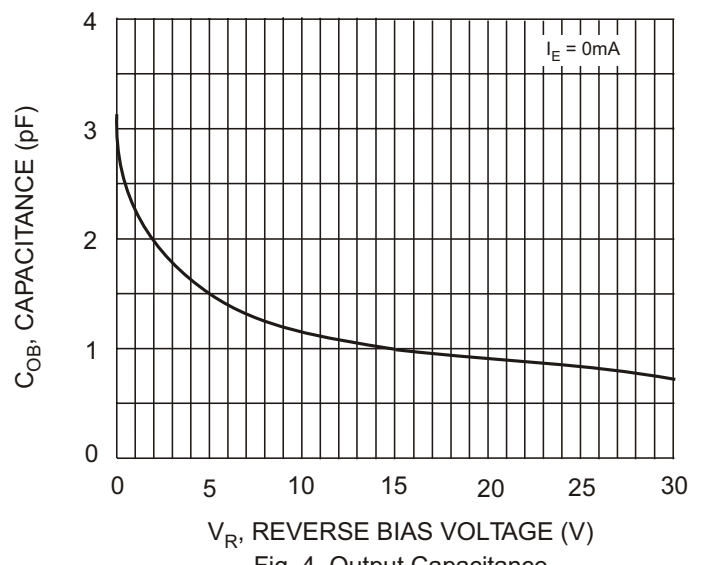


Fig. 4 Output Capacitance

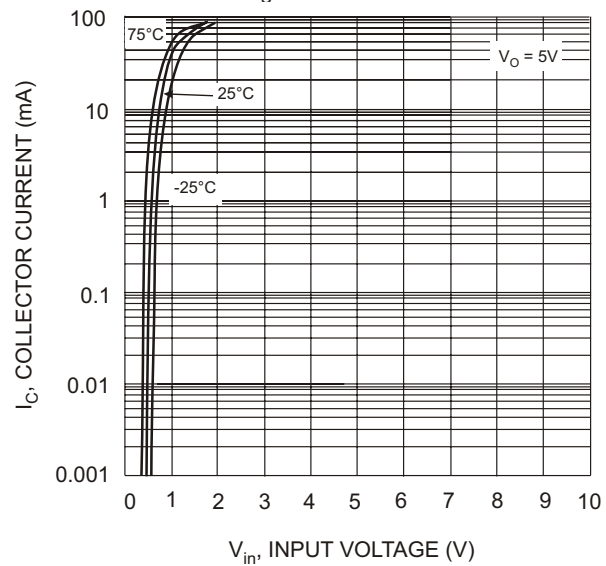


Fig. 5 Collector Current Vs. Input Voltage

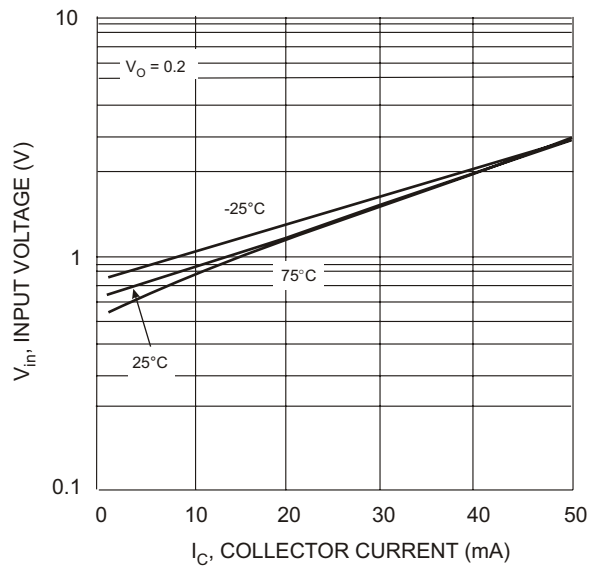


Fig. 6 Input Voltage vs. Collector Current

TYPICAL CURVES - DDC114TK

ONE SECTION

NEW PRODUCT

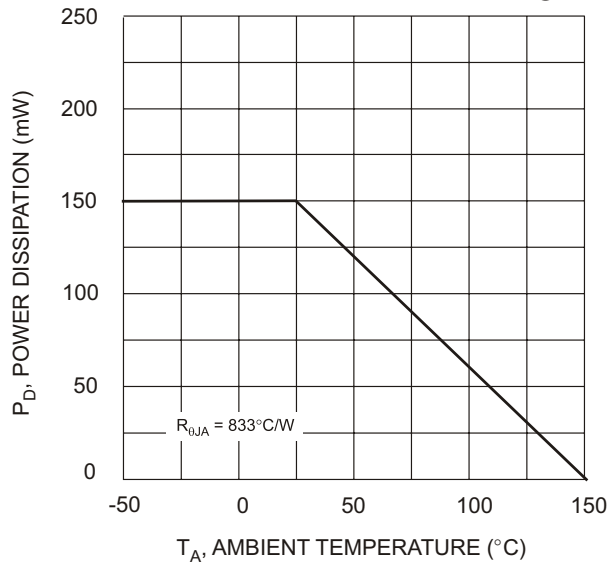


Fig. 1 Derating Curve

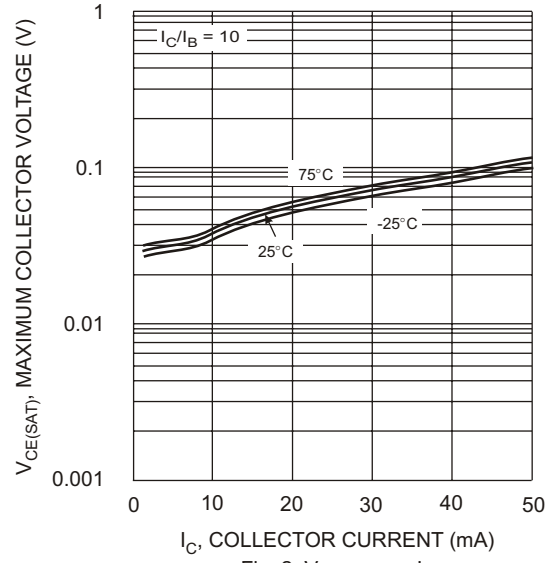


Fig. 2 $V_{CE(SAT)}$ vs. I_C

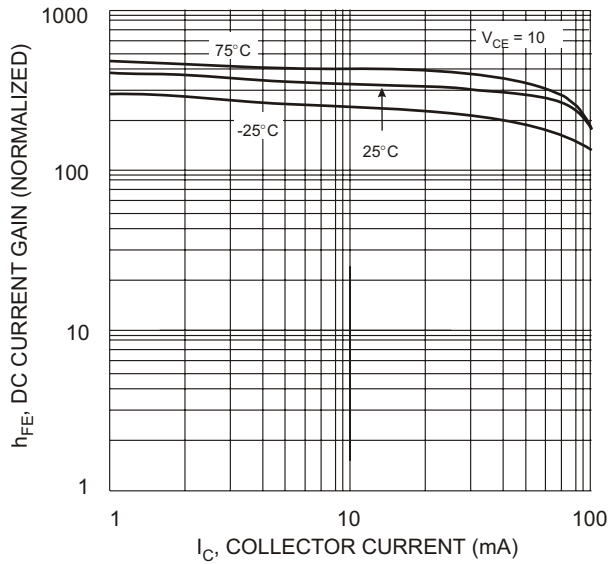


Fig. 3 DC Current Gain

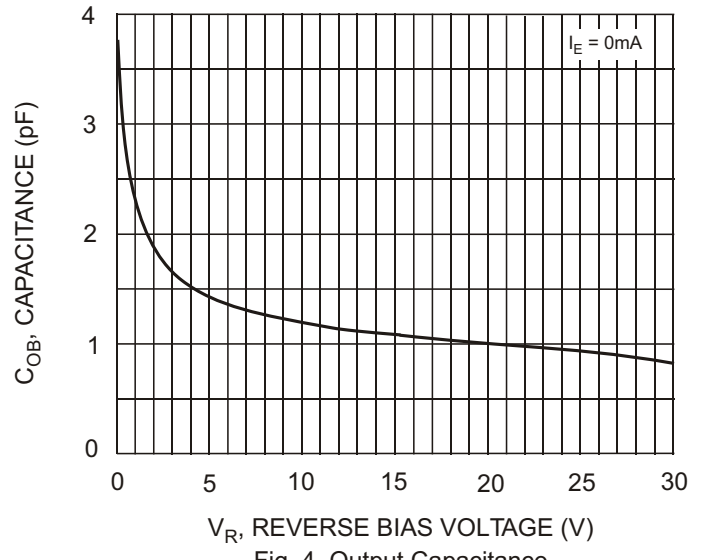


Fig. 4 Output Capacitance

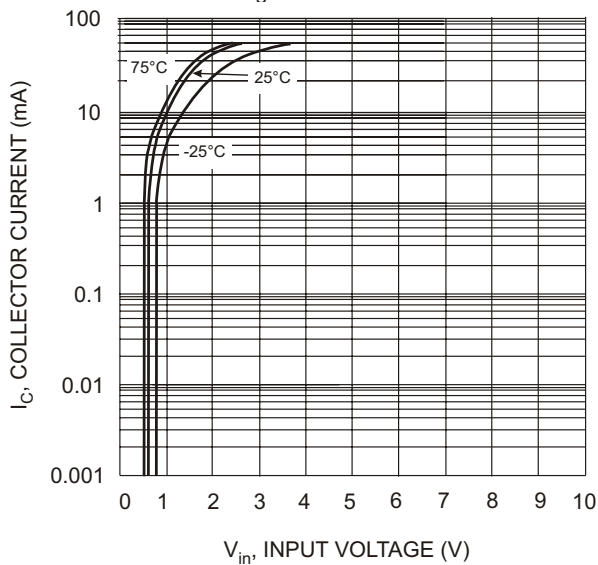


Fig. 5 Collector Current Vs. Input Voltage

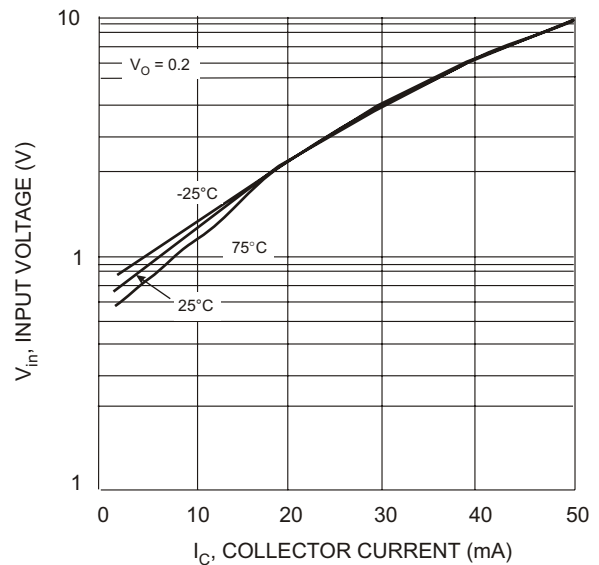


Fig. 6 Input Voltage vs. Collector Current



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.