

NPN PRE-BIASED SMALL SIGNAL SOT-563 DUAL SURFACE MOUNT TRANSISTOR


NEW PRODUCT

Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDA)
- Built-In Biasing Resistors
- Lead-Free Device

Mechanical Data


- Case: SOT-563, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Finish - Matte Tin Solderable per MIL-STD-202, Method 208 (Note 2)
- Terminal Connections: See Diagram
- Weight: 0.005 grams (approx.)

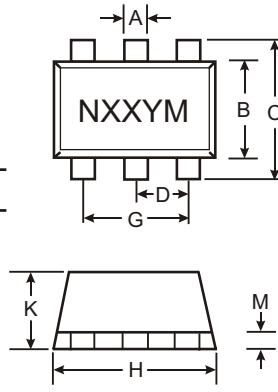

SOT-563			
Dim	Min	Max	Typ
A	0.15	0.30	0.25
B	1.10	1.25	1.20
C	1.55	1.70	1.60
D	0.50		
G	0.90	1.10	1.00
H	1.50	1.70	1.60
K	0.56	0.60	0.60
L	0.15	0.25	0.20
M	0.10	0.18	0.11
All Dimensions in mm			

SEE NOTE 1

P/N	R1	R2	MARKING
DDC124EH	22K Ω	22K Ω	N17
DDC144EH	47K Ω	47K Ω	N20
DDC143EH	4.7K Ω	4.7K Ω	N08
DDC114YH	10K Ω	47K Ω	N14
DDC123JH	2.2K Ω	47K Ω	N06
DDC114EH	10K Ω	10K Ω	N13
DDC143TH	4.7K Ω	-	N07
DDC114TH	10K Ω	-	N12

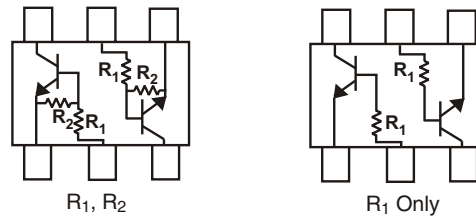

SCHEMATIC DIAGRAM, TOP VIEW

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage	V _{CC}	50	V
Input Voltage	V _{IN}	-10 to +40 -10 to +40 -10 to +30 -6 to +40 -5 to +12 -10 to +40 -5 V _{max} -5 V _{max}	V
Output Current	I _O	30 30 100 70 100 50 100 100	mA
Output Current	I _C (Max)	100	mA
Power Dissipation	P _d	150	mW
Thermal Resistance, Junction to Ambient Air (Note 3)	R _{θJA}	833	°C/W
Operating and Storage and Temperature Range	T _J , T _{STG}	-55 to +150	°C

- Note:
1. Package is non-polarized. Parts may be on reel in orientation illustrated, 180° rotated, or mixed (both ways).
 2. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.
 3. Mounted on FR4 Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic (DDC143TH & DDC114TH only)	Symbol	Min	Typ	Max	Unit	Test Condition	
Collector-Base Breakdown Voltage	BV _{CB0}	50	—	—	V	I _C = 50μA	
Collector-Emitter Breakdown Voltage	BV _{CEO}	50	—	—	V	I _C = 1mA	
Emitter-Base Breakdown Voltage	BV _{EBO}	5	—	—	V	I _E = 50μA	
Collector Cutoff Current	I _{CB0}	—	—	0.5	μA	V _{CB} = 50V	
Emitter Cutoff Current	I _{EBO}	—	—	0.5	μA	V _{EB} = 4V	
Collector-Emitter Saturation Voltage	V _{CE(sat)}	—	—	0.3	V	I _C /I _B = 2.5mA / 0.25mA I _C /I _B = 1mA / 0.1mA	DDC143TH DDC114TH
DC Current Transfer Ratio	h _{FE}	100	250	600	—	I _C = 1mA, V _{CE} = 5V	
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = 10V, I _E = -5mA, f = 100MHz	

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition			
Input Voltage	V _{I(off)}	—	—	0.5	1.1	V	V _{CC} = 5V, I _O = 100μA		
				DDC124EH	0.5			1.1	
DDC144EH				0.5	1.1				
DDC143EH				0.3	—				
DDC114YH				0.5	—				
DDC123JH				0.5	1.1				
Input Voltage	V _{I(on)}	—	—	1.9	3.0	V	V _O = 0.3V, I _O = 5mA V _O = 0.3V, I _O = 2mA V _O = 0.3V, I _O = 20mA V _O = 0.3V, I _O = 1mA V _O = 0.3V, I _O = 5mA V _O = 0.3V, I _O = 10mA		
				DDC124EH	1.9			3.0	
				DDC144EH	1.9			3.0	
				DDC143EH	1.9			3.0	
				DDC114YH	--			1.4	
				DDC123JH	--			1.1	
Output Voltage	V _{O(on)}	—	0.1	0.3	V	I _O /I _I = 10mA / 0.5mA I _O /I _I = 10mA / 0.5mA I _O /I _I = 10mA / 0.5mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 10mA / 0.5mA			
				DDC124EH			0.36	mA	V _I = 5V
				DDC144EH			0.18		
				DDC143EH			1.8		
				DDC114YH			0.88		
				DDC123JH			3.6		
DDC114EH	0.88								
Output Current	I _{O(off)}	—	—	0.5	μA	V _{CC} = 50V, V _I = 0V			
DC Current Gain	G _I	—	—	56	—	—	V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 5mA		
				DDC124EH				68	
				DDC144EH				20	
				DDC143EH				68	
				DDC114YH				80	
				DDC123JH				30	
DDC114EH	30								
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = 10V, I _E = 5mA, f = 100MHz			


* Transistor - For Reference Only

Ordering Information (Note 4)

Device	Packaging	Shipping
DDC124EH-7	SOT-563	3000/Tape & Reel
DDC144EH-7	SOT-563	3000/Tape & Reel
DDC143EH-7	SOT-563	3000/Tape & Reel
DDC114YH-7	SOT-563	3000/Tape & Reel
DDC123JH-7	SOT-563	3000/Tape & Reel
DDC114EH-7	SOT-563	3000/Tape & Reel
DDC143TH-7	SOT-563	3000/Tape & Reel
DDC114TH-7	SOT-563	3000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



XXX = Product Type Marking Code (See Page 1)
 YM = Date Code Marking
 Y = Year ex: P = 2003
 M = Month ex: 9 = September

Date Code Key

Year	2003	2004	2005	2006	2007	2008	2009
Code	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDC143EH

NEW PRODUCT

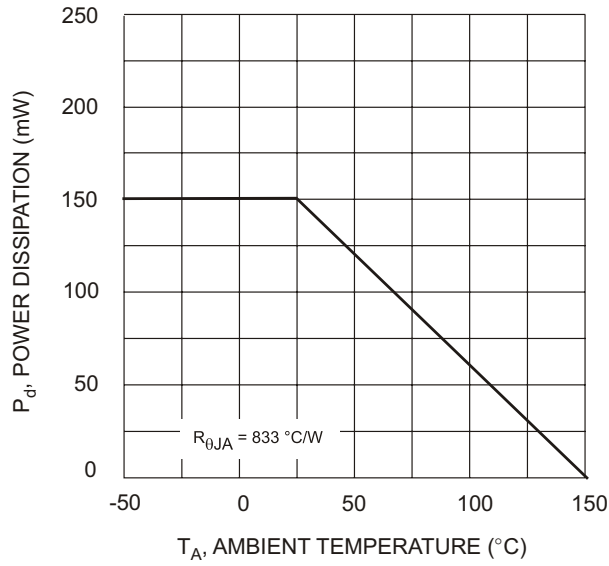


Fig. 1 Derating Curve

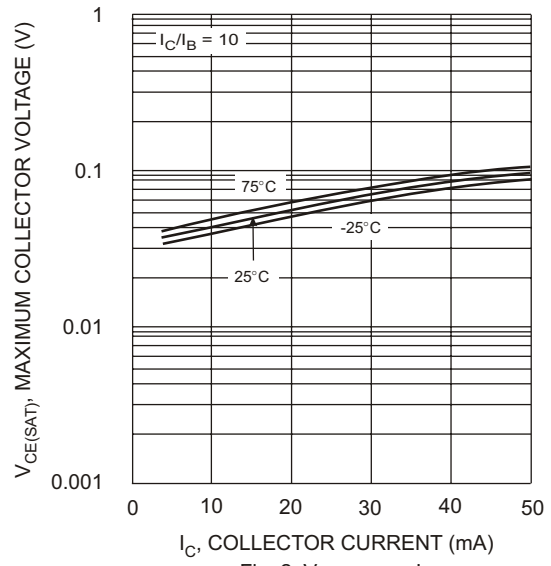


Fig. 2 $V_{CE(SAT)}$ vs. I_C

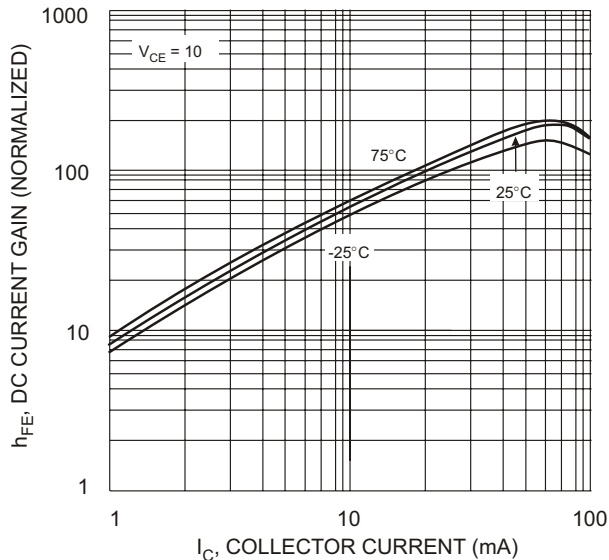


Fig. 3 DC Current Gain

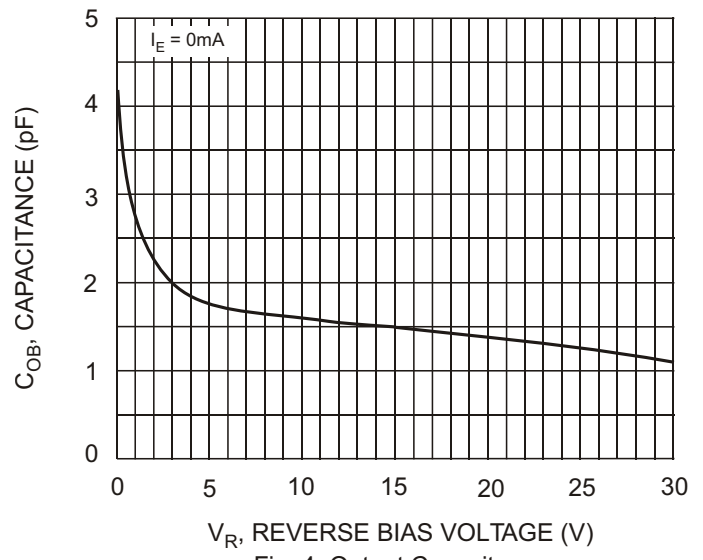


Fig. 4 Output Capacitance

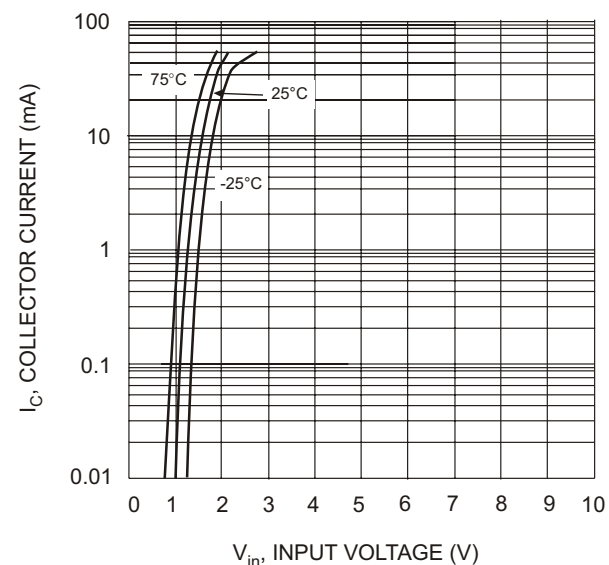


Fig. 5 Collector Current Vs. Input Voltage

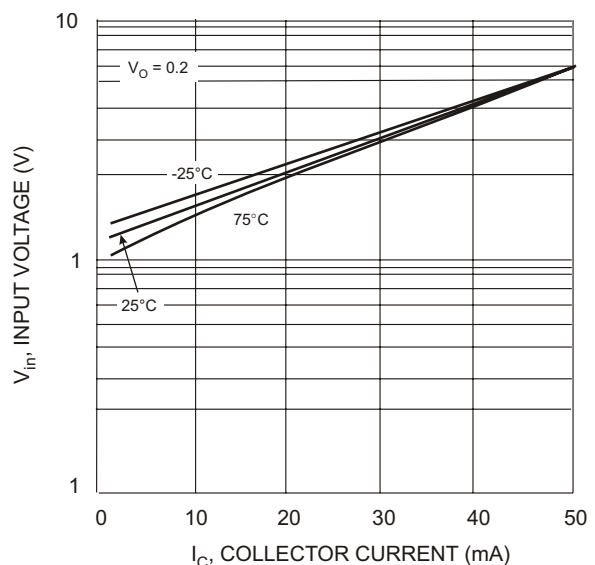


Fig. 6 Input Voltage vs. Collector Current



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.