


Features



- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDTC)
- Built-In Biasing Resistors, R1 = R2
- Also Available in Lead Free Version

Mechanical Data

- Case: SC-59, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 3, on Page 2
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 2)
- Weight: 0.008 grams (approx.)
- Ordering Information (See Page 2)

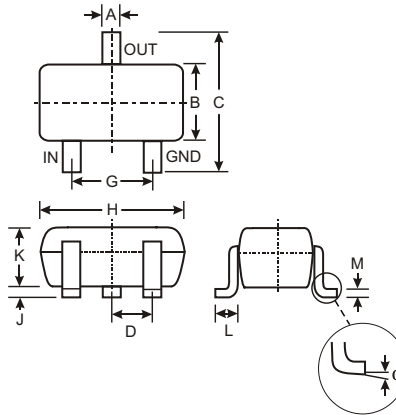

| SC-59 | | |
|----------------------|-------|------|
| Dim | Min | Max |
| A | 0.35 | 0.50 |
| B | 1.50 | 1.70 |
| C | 2.70 | 3.00 |
| D | 0.95 | |
| G | 1.90 | |
| H | 2.90 | 3.10 |
| J | 0.013 | 0.10 |
| K | 1.00 | 1.30 |
| L | 0.35 | 0.55 |
| M | 0.10 | 0.20 |
| α | 0° | 8° |
| All Dimensions in mm | | |

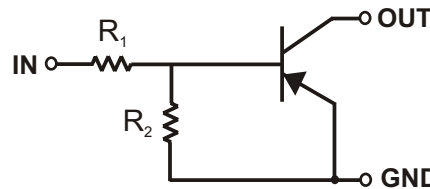

SCHEMATIC DIAGRAM

| P/N | R1, R2 (NOM) | MARKING |
|------------|---------------|---------|
| DDTA123EKA | 2.2K Ω | P04 |
| DDTA143EKA | 4.7K Ω | P08 |
| DDTA114EKA | 10K Ω | P13 |
| DDTA124EKA | 22K Ω | P17 |
| DDTA144EKA | 47K Ω | P20 |
| DDTA115EKA | 100K Ω | P24 |

Maximum Ratings @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|--|------|
| Supply Voltage, (3) to (1) | V _{CC} | -50 | V |
| Input Voltage, (2) to (1) | V _{IN} | +10 to -12 +10 to -30 +10 to -40 +10 to -40 +10 to -40 +10 to -40 | V |
| Output Current | I _O | -100 -100 -50 -30 -100 -20 | mA |
| Output Current | I _C (Max) | -100 | mA |
| Power Dissipation | P _d | 200 | mW |
| Thermal Resistance, Junction to Ambient Air (Note 1) | R _{θJA} | 625 | °C/W |
| Operating and Storage and Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition |
|--|--|--------------------------------|----------------------------------|------|--|------|---|
| Input Voltage | | V _{I(off)} | -0.5 | -1.1 | — | V | V _{CC} = -5V, I _O = -100μA |
| | | V _{I(on)} | — | -1.9 | -3 | | V _O = -0.3V, I _O = -20mA, DDTA123EKA V _O = -0.3V, I _O = -20mA, DDTA143EKA V _O = -0.3V, I _O = -10mA, DDTA114EKA V _O = -0.3V, I _O = -5mA, DDTA124EKA V _O = -0.3V, I _O = -2mA, DDTA144EKA V _O = -0.3V, I _O = -1mA, DDTA115EKA |
| Output Voltage | | V _{O(on)} | — | -0.1 | -0.3 | V | I _O /I _I = -10mA/-0.5mA, DDTA123EKA I _O /I _I = -10mA/-0.5mA, DDTA143EKA I _O /I _I = -10mA/-0.5mA, DDTA114EKA I _O /I _I = -10mA/-0.5mA, DDTA124EKA I _O /I _I = -10mA/-0.5mA, DDTA144EKA I _O /I _I = -5mA/-0.25mA, DDTA115EKA |
| Input Current | DDTA123EKA DDTA143EKA DDTA114EKA DDTA124EKA DDTA144EKA DDTA115EKA | I _I | — | — | -3.8 -1.8 -0.88 -0.36 -0.18 -0.15 | mA | V _I = -5V |
| Output Current | | I _{O(off)} | — | — | -0.5 | μA | V _{CC} = -50V, V _I = 0V |
| DC Current Gain | DDTA123EKA DDTA143EKA DDTA114EKA DDTA124EKA DDTA144EKA DDTA115EKA | G _I | 20 20 30 56 68 82 | — | — | — | V _O = -5V, I _O = -20mA V _O = -5V, I _O = -10mA V _O = -5V, I _O = -5mA V _O = -5V, I _O = -5mA V _O = -5V, I _O = -5mA V _O = -5V, I _O = -5mA |
| Input Resistor (R ₁) Tolerance | | DR ₁ | -30 | — | +30 | % | — |
| Resistance Ratio | | R ₂ /R ₁ | 0.8 | 1 | 1.2 | — | — |
| Gain-Bandwidth Product* | | f _T | — | 250 | — | MHz | V _{CE} = -10V, I _E = 5mA, f = 100MHz |


* Transistor - For Reference Only

Ordering Information (Note 2)

| Device | Packaging | Shipping |
|--------------|-----------|------------------|
| DDTA123EKA-7 | SC-59 | 3000/Tape & Reel |
| DDTA143EKA-7 | SC-59 | 3000/Tape & Reel |
| DDTA114EKA-7 | SC-59 | 3000/Tape & Reel |
| DDTA124EKA-7 | SC-59 | 3000/Tape & Reel |
| DDTA144EKA-7 | SC-59 | 3000/Tape & Reel |
| DDTA115EKA-7 | SC-59 | 3000/Tape & Reel |

- Notes:
- For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
 - For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to part number above.
Example: DDTA115EKA-7-F.

Marking Information



XXX = Product Type Marking Code
See Sheet 1 Diagrams
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

TYPICAL CURVES - DDTA143EKA

NEW PRODUCT

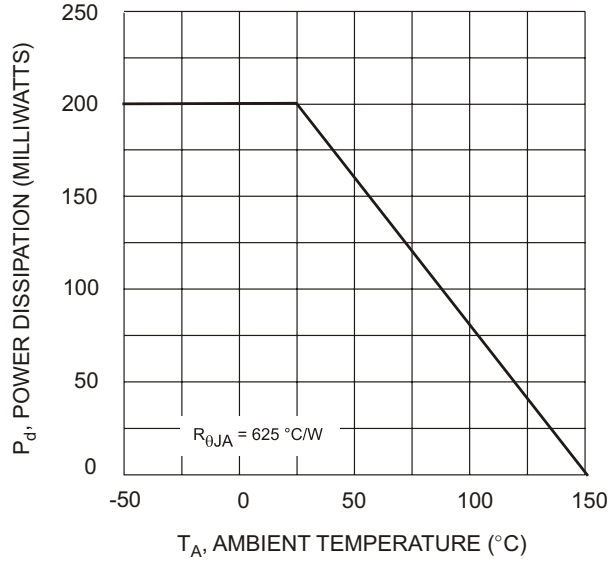


Fig. 1 Derating Curve

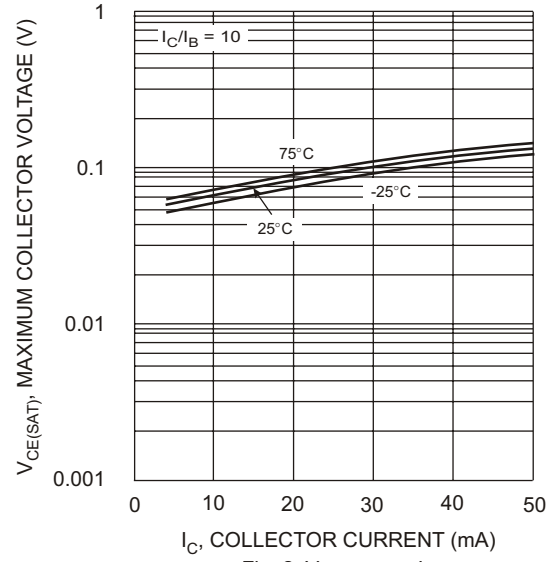


Fig. 2 $V_{CE(SAT)}$ vs. I_C

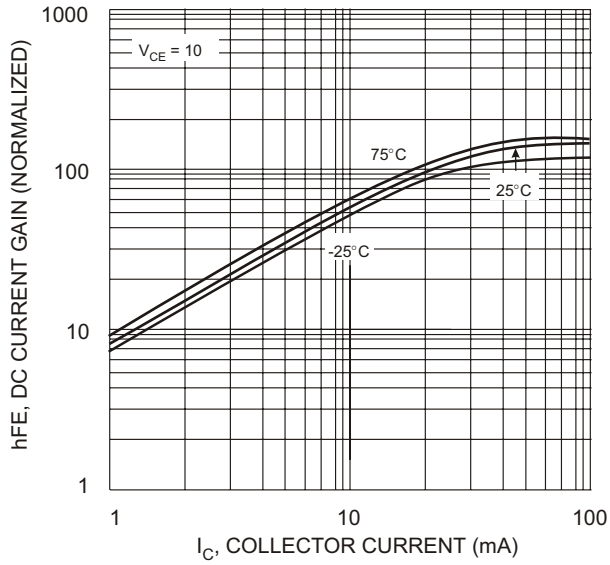


Fig. 3 DC CURRENT GAIN

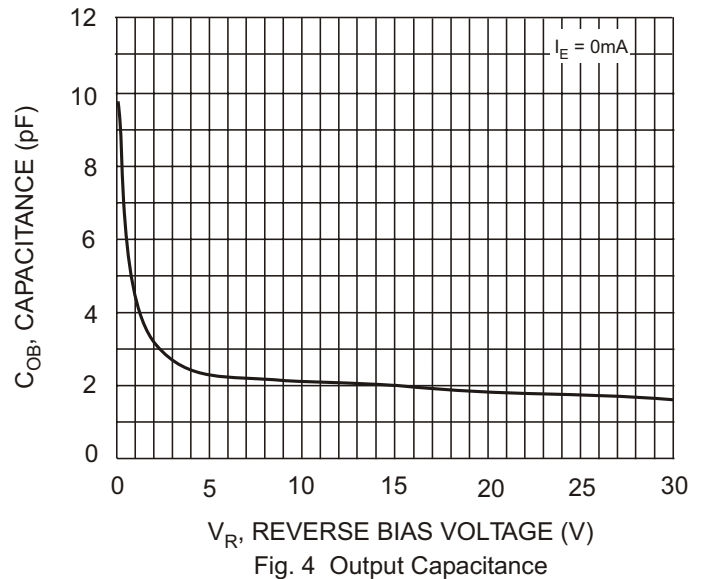


Fig. 4 Output Capacitance

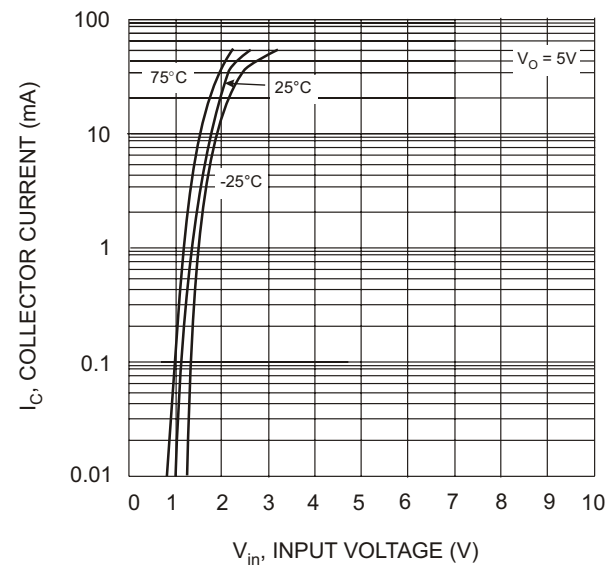


Fig. 5 Collector Current Vs. Input Voltage

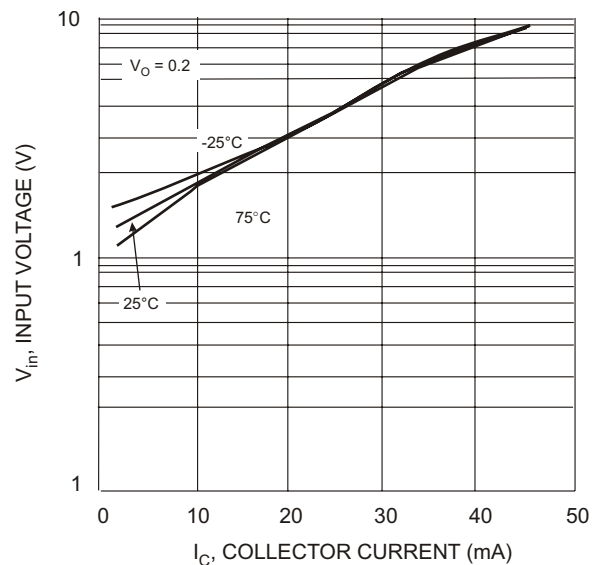


Fig. 6 Input Voltage vs. Collector Current



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.