

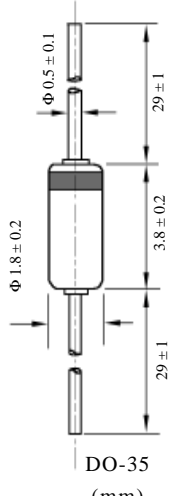
1N52 SERIES ZENER DIODES

1N52 系列稳压二极管

1N52 SERIES ZENER DIODES

1N5221B Through 1N5272B ELECTRICAL CHARACTERISTICS 电性参数

($T_A=25^{\circ}\text{C}$) unless otherwise noted. Based on dc measurements at thermal equilibrium; lead length=3/8"; thermal resistance of heat sink=30°C/W $V_{Fmax}=1.1\text{V}$ @ $I_F=200\text{mA}$ for all types ($T_A=25^{\circ}\text{C}$ 所有型号 $V_{Fmax}=1.1\text{V}$ @ $I_F=200\text{mA}$ 。其它特别说明除外。)

型号 TYPE	稳压值 Nominal Zener Voltage $V_Z@I_{ZT}$ Volts	测试电流 Test Current I_{ZT} mA	最大动态阻抗 Max Zener Impedance A and B Suffix only		漏电流 Max Reverse Leakage Current		温度系数 Max Zener Voltage Temperature Coff (A and B suffix only) $V_Z(\%/^{\circ}\text{C})$	外型尺寸 Package Dimensions
			$Z_{ZT}@I_{ZT}$ Ohms	$Z_{ZK}@I_{ZK}$ = 0.25mA Ohms	I_R μA	V_R Volts B		
1N5221B	2.4	20	30	1200	100		-0.085	 <p>DO-35 (mm)</p>
1N5222B	2.5		30	1250	100		-0.085	
1N5223B	2.7		30	1300	75	1.0	-0.08	
1N5224B	2.8		30	1400	75		-0.08	
1N5225B	3.0		29	1600	50		-0.075	
1N5226B	3.3	20	28	1600	25	1.0	-0.07	
1N5227B	3.6		24	1700	15	1.0	-0.065	
1N5228B	3.9		23	1900	10	1.0	-0.06	
1N5229B	4.3		22	2000	5.0	1.0	± 0.055	
1N5230B	4.7		19	1900	5.0	2.0	± 0.03	
1N5231B	5.1	20	17	1600	5.0	2.0	± 0.03	
1N5232B	5.6		11	1600	5.0	3.0	+0.038	
1N5233B	6.0		7.0	1600	5.0	3.5	+0.038	
1N5234B	6.2		7.0	1000	5.0	4.0	+0.045	
1N5235B	6.8		5.0	750	3.0	5.0	+0.05	
1N5236B	7.5	20	6.0	500		6.0	+0.058	
1N5237B	8.2		8.0	500		6.5	+0.062	
1N5238B	8.7		8.0	600	3.0	6.5	+0.065	
1N5239B	9.1		10	600		7.0	+0.068	
1N5240B	10		17	600		8.0	+0.075	
1N5241B	11	20	22		2.0	8.4	+0.076	
1N5242B	12	20	30		1.0	9.1	+0.077	
1N5243B	13	9.5	13	600	0.5	9.9	+0.079	
1N5244B	14	9.0	15		0.1	10	+0.082	
1N5245B	15	8.5	16		0.1	11	+0.082	
1N5246B	16	7.8	17			12	+0.083	
1N5247B	17	7.4	19			13	+0.084	
1N5248B	18	7.0	21	600	0.1	14	+0.085	
1N5249B	19	6.6	23			14	+0.086	
1N5250B	20	6.2	25			15	+0.086	
1N5251B	22	5.6	29			17	+0.087	
1N5252B	24	5.2	33			18	+0.088	
1N5253B	25	5.0	35	600	0.1	19	+0.089	
1N5254B	27	4.6	41			21	+0.090	
1N5255B	28	4.5	44			21	+0.091	

NOTE: The V_Z value shown is the center value with tolerance designations

注: V_Z 为稳压中心值, 其中 B 档 V_Z 容差 $\pm 5\%$
C 档 V_Z 容差 $\pm 2\%$
D 档 V_Z 容差 $\pm 1\%$

as follows:

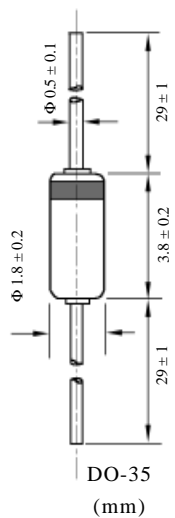
suffix B: $V_Z \pm 5\%$
suffix C: $V_Z \pm 2\%$
suffix D: $V_Z \pm 1\%$

1N52 系列稳压二极管

1N52 SERIES ZENER DIODES

1N5221B Through 1N5272B ELECTRICAL CHARACTERISTICS 电性参数

 (T_A=25°C) unless otherwise noted. Based on dc measurements at thermal equilibrium; lead length=3/8"; thermal resistance of heat sink=30°C/W V_{Fmax}=1.1V @ I_F=200mA for all types (T_A=25°C 所有型号 V_{Fmax}=1.1V @ I_F=200mA。其它特别说明除外。)

型号 TYPE	稳压值 Nominal Zener Voltage V _Z @I _{ZT} Volts	测试电流 Test Current I _{ZT} mA	最大动态阻抗 Max Zener Impedance A and B Suffix only		漏电流 Max Reverse Leakage Current		温度系数 Max Zener Voltage Temperature Coff (A and B suffix only) VZ(%/°C)	外型尺寸 Package Dimensions	
			Z _{ZT} @I _{ZT} Ohms	Z _{ZK} @I _{ZK} = 0.25mA Ohms	I _R μA	V _R Volts B			
1N5256B	30	4.2	49	600	0.1	23	+0.091	 <p>DO-35 (mm)</p>	
1N5257B	33	3.8	58	700		25	+0.092		
1N5258B	36	3.4	70	700		27	+0.093		
1N5259B	39	3.2	80	800		30	+0.094		
1N5260B	43	3.0	93	900		33	+0.095		
1N5261B	47	2.7	105	1000	0.1	36	+0.095		
1N5262B	51	2.5	125	1100		39	+0.096		
1N5263B	56	2.2	150	1300		43	+0.096		
1N5264B	60	2.1	170	1400		46	+0.097		
1N5265B	62	2.0	185	1400		47	+0.097		
1N5266B	68	1.8	230	1600	0.1	52	+0.097		
1N5267B	75	1.7	270	1700		56	+0.098		
1N5268B	82	1.5	330	2000		62	+0.098		
1N5269B	87	1.4	370	2200		68	+0.099		
1N5270B	91	1.4	400	2300		69	+0.099		
1N5271B	100	1.3	500	2600	0.1	76	+0.110		
1N5272B	110	1.1	750	3000		84	+0.110		

 NOTE: The V_Z value shown is the center value with tolerance designations as follows:

 suffix B: V_Z±5%
 suffix C: V_Z±2%
 suffix D: V_Z±1%

 注: V_Z为稳压中心值, 其中 B 档 V_Z容差±5%
 C 档 V_Z容差±2%
 D 档 V_Z容差±1%



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.