

GI2401 THRU GI2404

GLASS PASSIVATED PLASTIC RECTIFIER


Reverse Voltage - 50 to 200 Volts

Forward Current - 16.0 Amperes

TO-220AB

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Dual rectifier construction, positive centertap
- ◆ Glass passivated chip junctions
- ◆ Low power loss
- ◆ High surge capability
- ◆ Superfast recovery times for high efficiency
- ◆ High temperature soldering guaranteed: 250°C, 0.16" (4.06mm) from case for 10 seconds

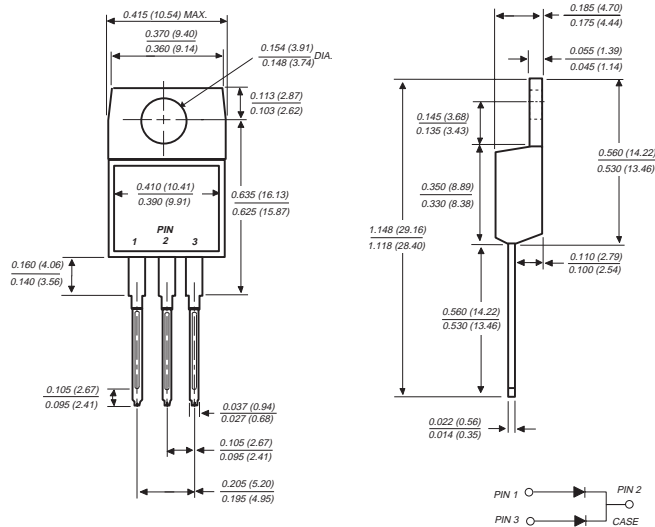

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDEC TO-220AB molded plastic body over passivated chips

Terminals: Plated lead solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Mounting Torque: 5 in. - lbs. max.

Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	GI2401	GI2402	GI2403	GI2404	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	Volts
Maximum RMS voltage	V_{RMS}	35	70	105	140	Volts
Maximum DC blocking voltage	V_{DC}	50	100	150	200	Volts
Maximum average forward rectified current at $T_C=125^\circ\text{C}$	$I_{(AV)}$	16.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_C=125^\circ\text{C}$	I_{FSM}	125.0				Amps
Maximum instantaneous forward voltage per leg at: $I_F=4\text{A}, T_J=25^\circ\text{C}$ $I_F=8\text{A}, T_J=25^\circ\text{C}$ $I_F=4\text{A}, T_J=100^\circ\text{C}$ $I_F=8\text{A}, T_J=100^\circ\text{C}$	V_F	0.975 0.900 0.800 0.895				Volts
Maximum DC reverse current at rated DC blocking voltage $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$	I_R	50.0 150.0			5.0 500.0	μA
Maximum reverse recovery time per leg (NOTE 1)	t_{rr}	35.0				ns
Typical junction capacitance per leg (NOTE 2)	C_J	85.0				pF
Typical thermal resistance per leg (NOTE 3)	$R_{\theta JA}$ $R_{\theta JC}$	16.0 2.2				$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150				$^\circ\text{C}$

NOTES:

(1) Reverse recovery test conditions: $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to case and from junction to ambient per leg mounted on heatsink

RATINGS AND CHARACTERISTICS CURVES GI2401 THRU GI2404

FIG. 1 - FORWARD CURRENT DERATING CURVE

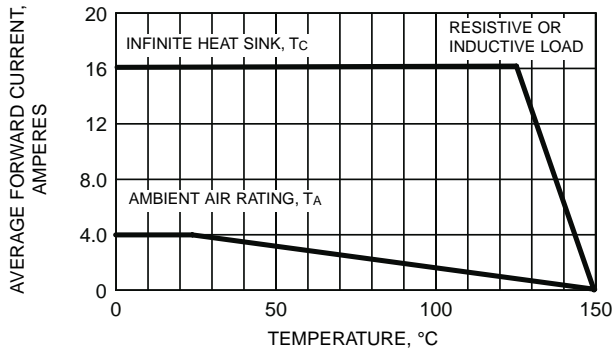


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

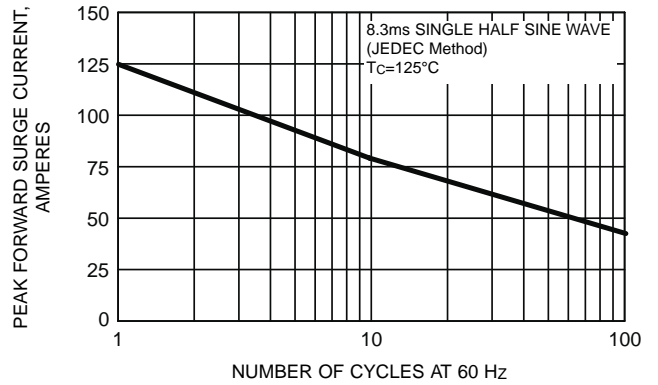


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

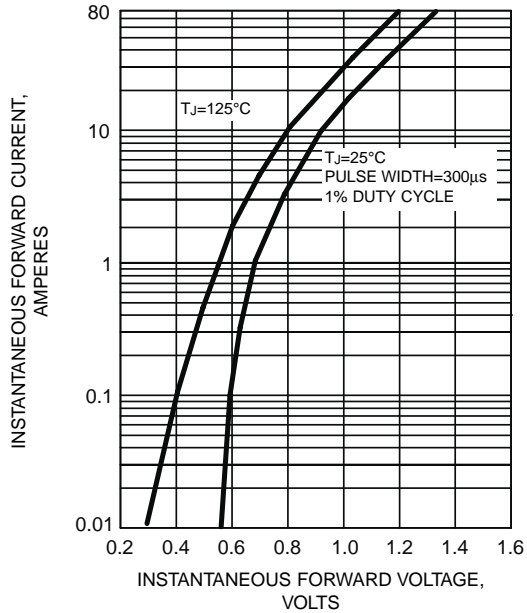


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS PER LEG


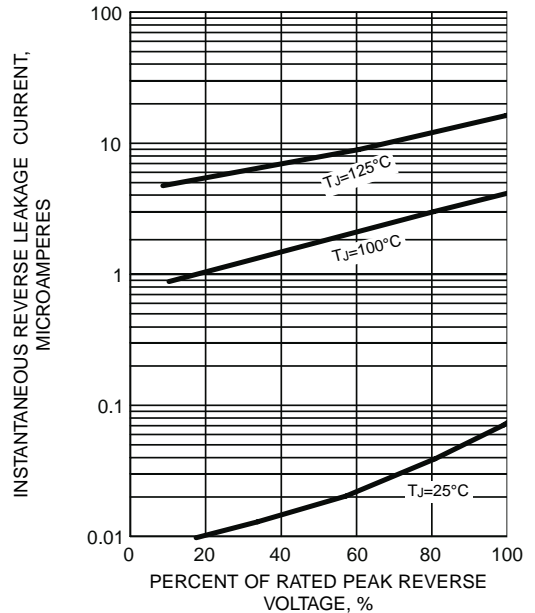


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG



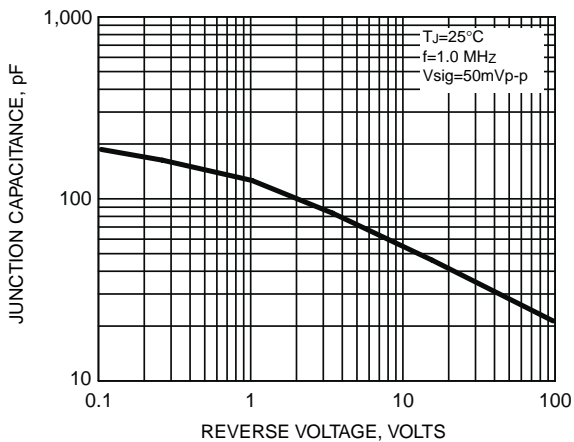

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.