



HIRF630


N - Channel MOSFETs

Description

Dynamic dv / dt Rating

- Repetitive Avalanche Rated
- Fast Switching
- Ease of Paralleling
- Simple Drive Requirements

This N - Channel MOSFETs provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

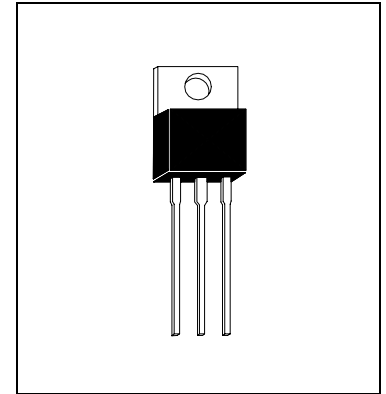

Absolute Maximum Ratings (Ta=25°C)

- Maximum Temperatures
Storage Temperature -55 ~ +150 °C
Junction Temperature 150 °C Maximum
- Maximum Power Dissipation
Total Power Dissipation (Tc=25°C) 74 W
- Maximum Voltages and Currents (Tc=25°C)
Drain To Source Breakdown Voltage 200 V
Gate To Source Voltage ± 20 V
Continuous Source Current 9 A
Pulsed Drain Current 36 A

Characteristics (Ta=25°C)

Symbol	Parameter	Max.	Units
ID Tc=25°C	Continuous Drain Current, VGS at 10V	9	A
EAS	Single Pulse Avalanche Energy (1)	250	mJ
IAR	Avalanche Current (2)	9	A
EAR	Repetitive Avalanche Energy (2)	7.4	mJ
dv / dt	Peak Diode Recovery dv / dt (3)	5	V / ns

Note : $V_{DD}=50V$, starting $T_J=25^\circ C$, $L=4.6mH$, $R_Q=25\Omega$, $I_{AS}=9A$

Repetitive rating; width limited by max. Junction temperature. $I_{SD}\leq 9A$, $di/dt\leq 120A / \mu s$, $V_{DD}\leq V_{(BR)DSS}$, $T_J\leq 150^\circ C$

Thermal Resistance

Symbol	Parameter	Min.	Typ.	Max.	Units
RθJC	Junction to Case	-	-	1.7	°C/W
RθCS	Case to Sink, Flat, Greased Surface	-	0.5	-	
RθJA	Junction to Ambient	-	-	62	












Characteristics (Ta=25°C)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
V(BR)DSS	200	-	-	V	ID=100uA
VGS(th)	2	-	4	V	VDS=4V, ID=250uA
IDSS	-	-	25	uA	VDS=200V
IGSS	-	-	100	nA	VGS=20V
IGSS	-	-	-100	nA	VGS=-20V
Qg	-	-	40	nC	ID=10A
Qgs	-	-	8	nC	VDS=200V
Qgd	-	-	10	nC	VGS=10V
ton	-	200	-	nS	VDD=100V
td(off)	-	90	-	nS	ID=5A
tf	-	60	-	nS	VGS=10V
VDS(on)	-	-	2	V	ID=5.0A, VG = 10V
ID(on)	9	-	-	A	VDS=10V, VGS=10V
RDS(on)	-	-	0.4	Ω	VGS=10V, ID = 5.4A
Ciss	-	800	-	pF	VGS=0V
Coss	-	240	-	pF	VDS=25V
Crss	-	90	-	pF	f=1MHz




Characteristics Curve

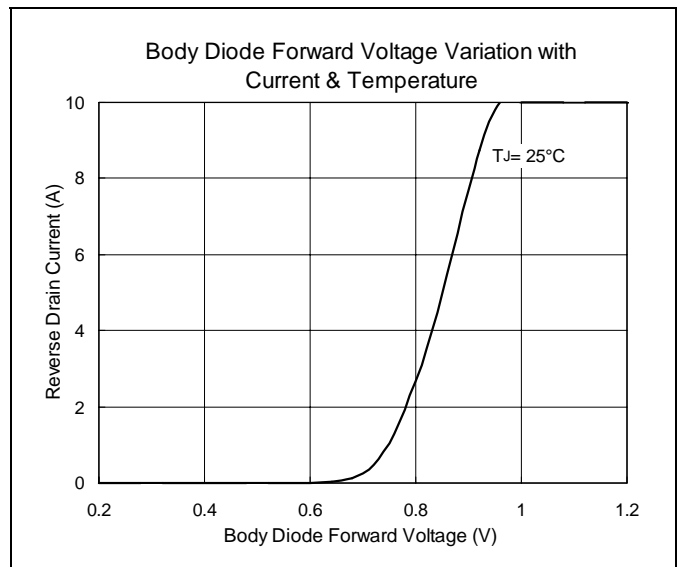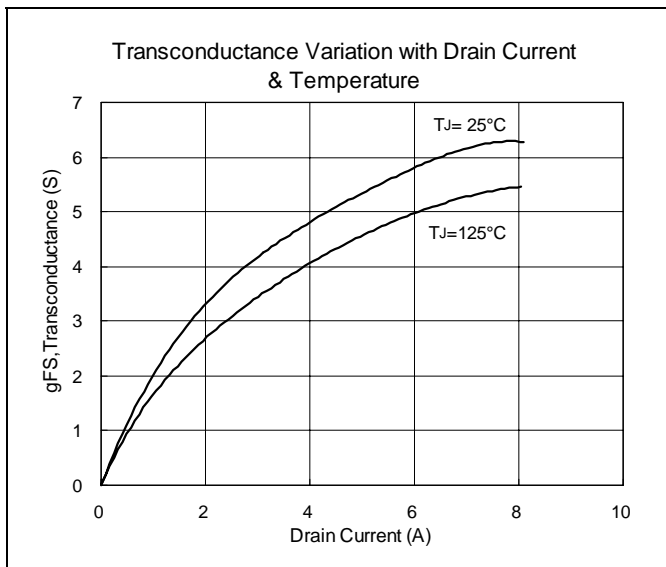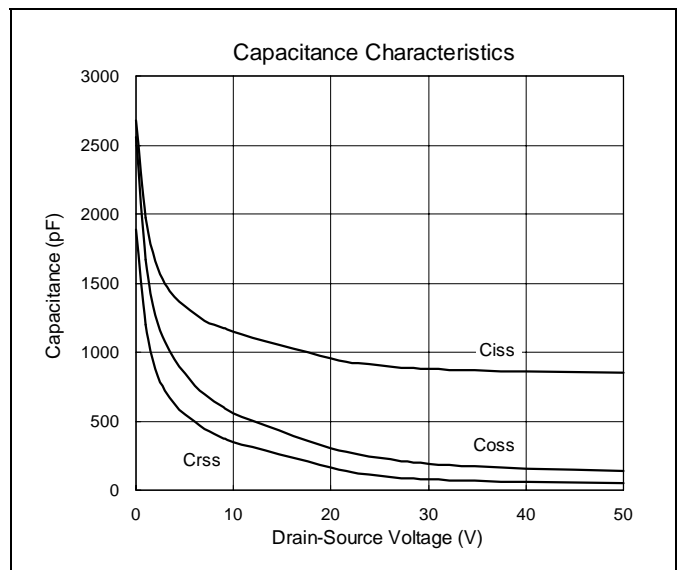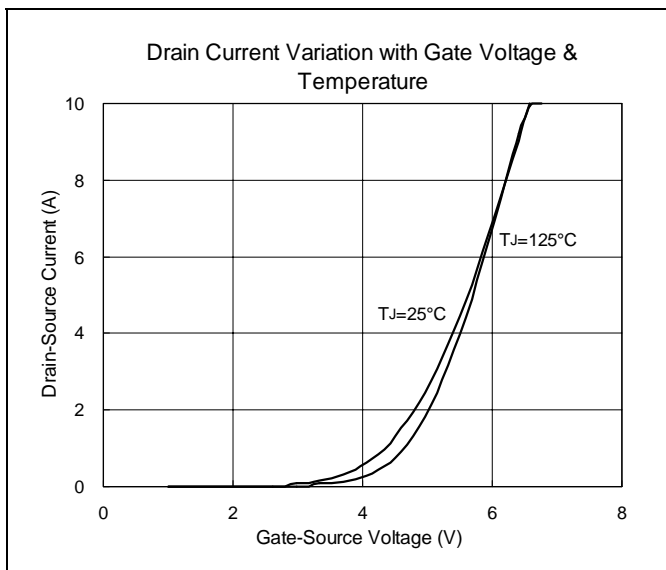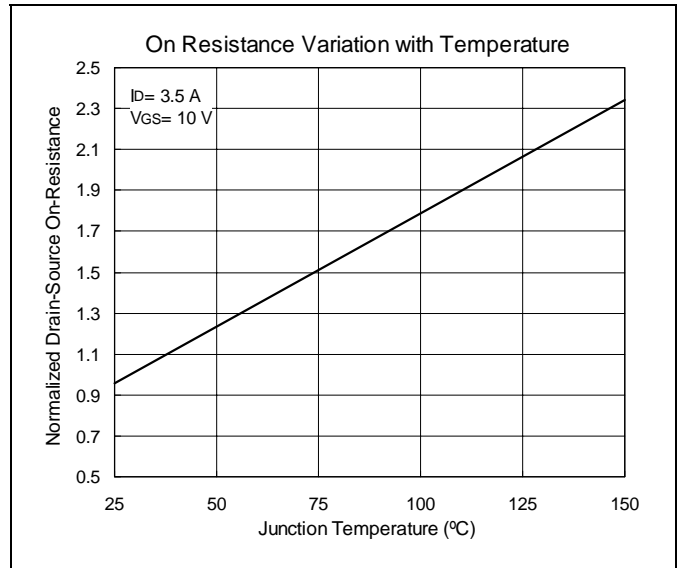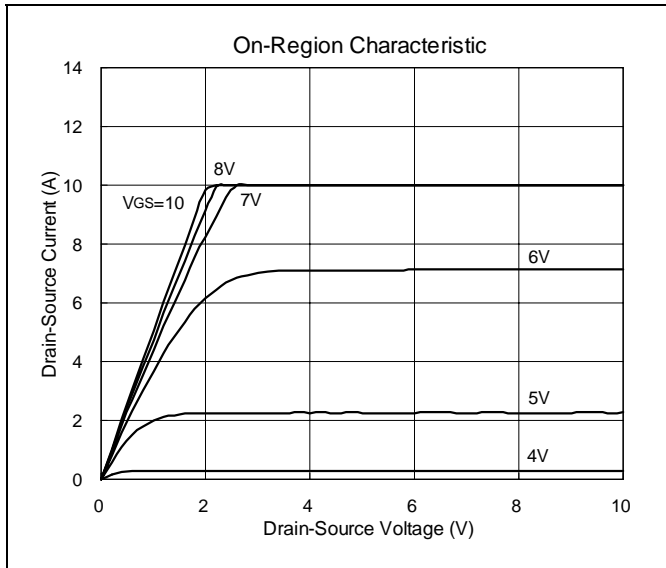

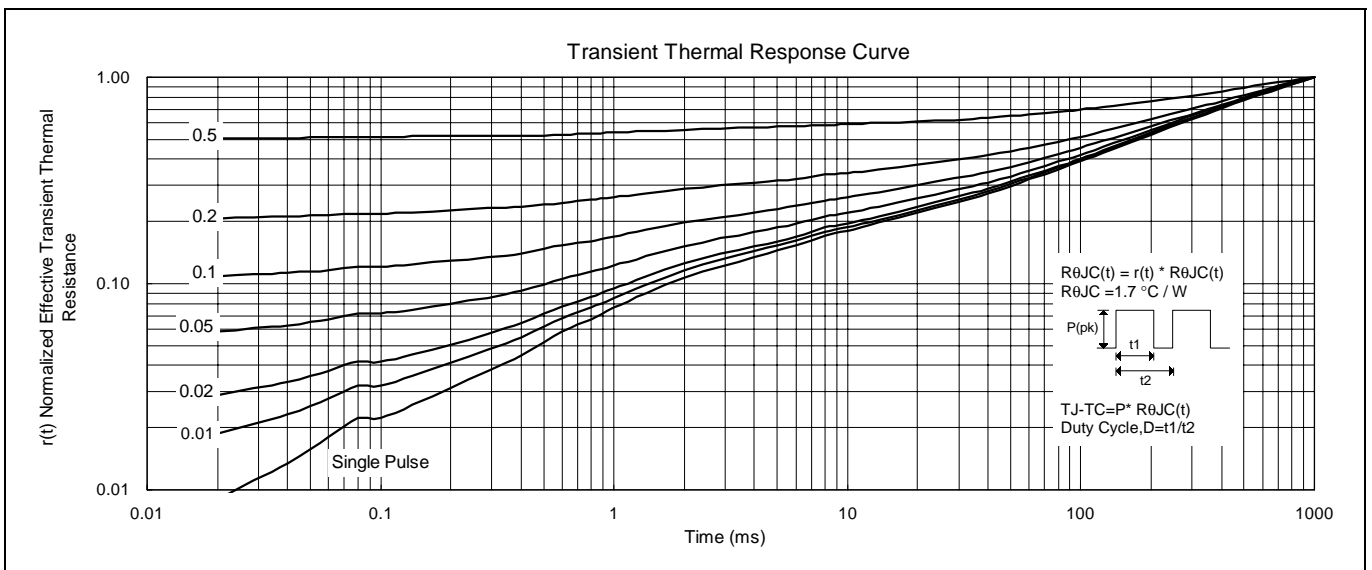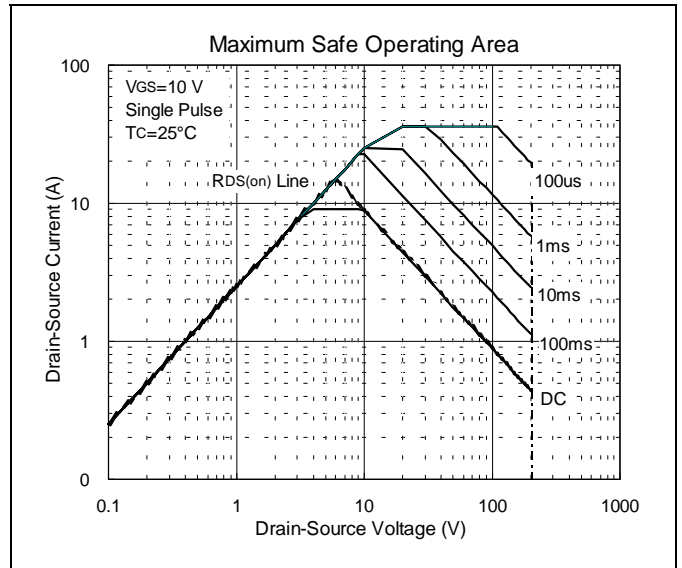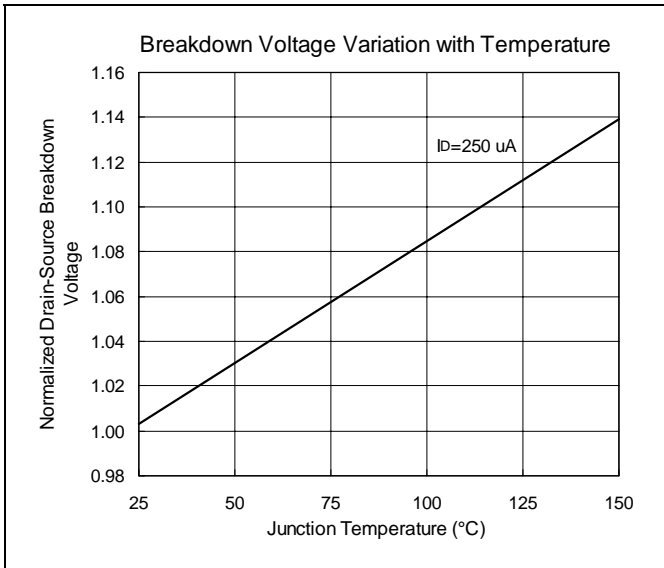



TO-220AB Dimension

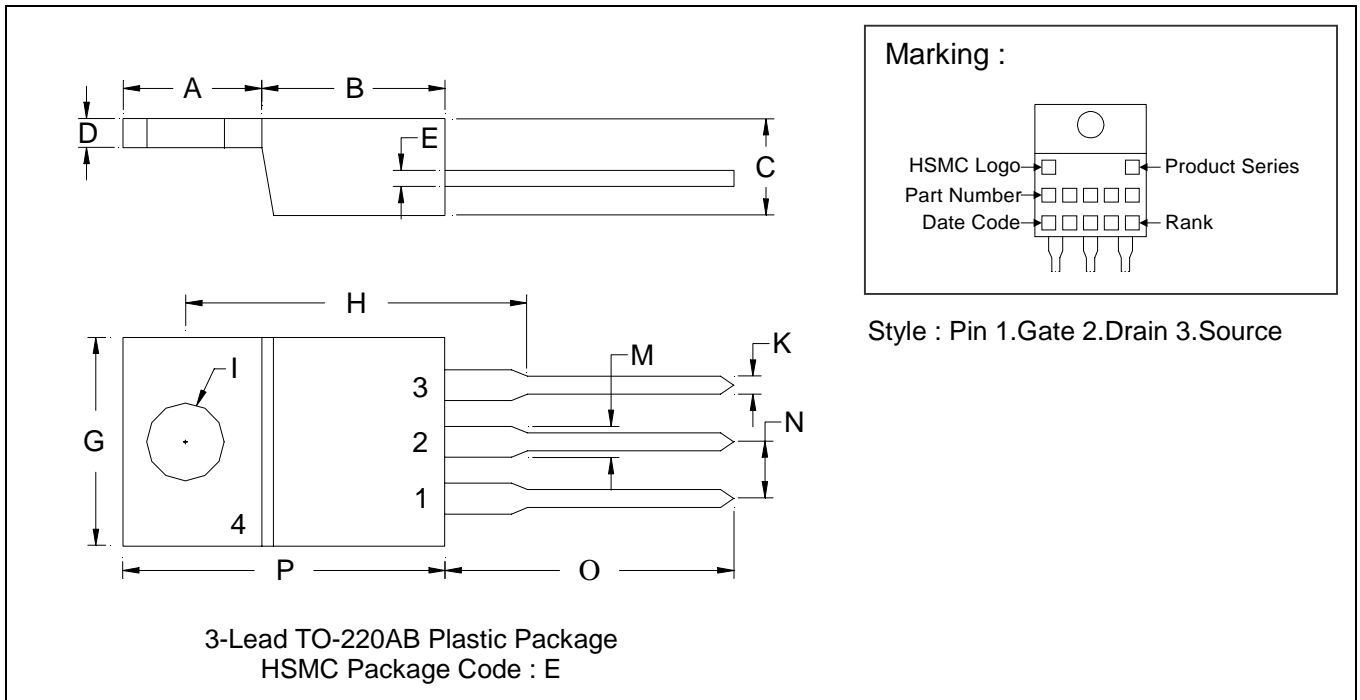

*:Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.2197	0.2949	5.58	7.49	I	-	*0.1508	-	*3.83
B	0.3299	0.3504	8.38	8.90	K	0.0295	0.0374	0.75	0.95
C	0.1732	0.185	4.40	4.70	M	0.0449	0.0551	1.14	1.40
D	0.0453	0.0547	1.15	1.39	N	-	*0.1000	-	*2.54
E	0.0138	0.0236	0.35	0.60	O	0.5000	0.5618	12.70	14.27
G	0.3803	0.4047	9.66	10.28	P	0.5701	0.6248	14.48	15.87
H	-	*0.6398	-	*16.25					

- Notes : 1.Dimension and tolerance based on our Spec. dated Sep. 07,1997.
 2.Controlling dimension : millimeters.
 3.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 4.If there is any question with packing specification or packing method, please contact your local HSMC sales office.

Material :

- Lead : 42 Alloy ; solder plating
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory :

- **Head Office** (Hi-Sincerity Microelectronics Corp.) : 10F.,No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.
Tel : 886-2-25212056 Fax : 886-2-25632712, 25368454
- **Factory 1** : No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
Tel : 886-3-5983621~5 Fax : 886-3-5982931
- **Factory 2** : No. 17-1, Ta-Tung Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
Tel : 886-3-5977061 Fax : 886-3-5979220



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.