


MECHANICAL DATA

Dimensions in mm (inches)

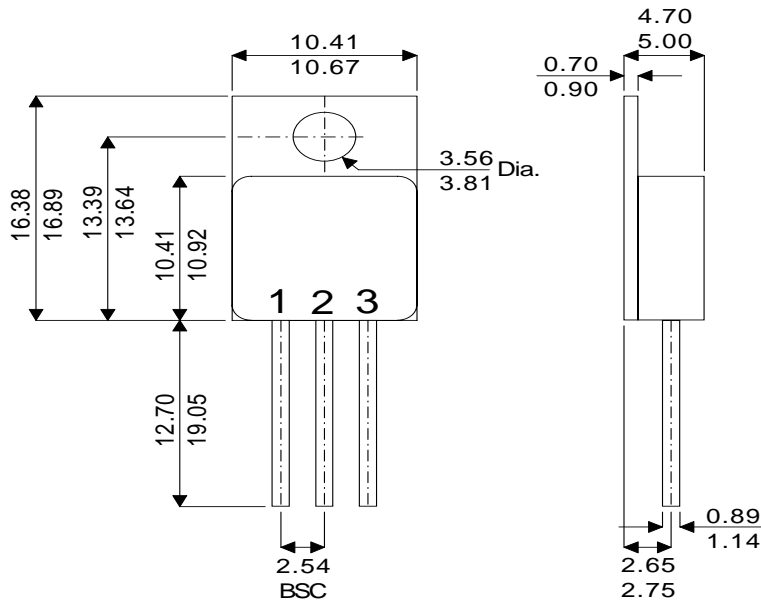

TO-220M – Metal Package
Ceramic Lead Seals

Pad 1 – Gate Pad 2 – Drain Pad 3 – Source

**N-CHANNEL
POWER MOSFET
FOR HI-REL
APPLICATIONS**

V_{DSS} **60V**
 $I_{D(cont)}$ **20A**
 $R_{DS(on)}$ **0.035Ω**

FEATURES

- HERMETICALLY SEALED TO-220 METAL PACKAGE
- SIMPLE DRIVE REQUIREMENTS
- LIGHTWEIGHT
- ALL LEADS ISOLATED FROM CASE

AVAILABLE SCREENINGS

FULL ASSESSMENT LEVEL	IRFY044C.MOD	IRFY044CJ
SEQUENCE A	IRFY004C-A	IRFY044CJXV
SEQUENCE B	IRFY004C-B	IRFY044CJTX
SEQUENCE C	IRF044C-C	
SEQUENCE D	IRFY044C-D	

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

V_{GS}	Gate – Source Voltage	±20V
I_D	Continuous Drain Current @ $T_C = 25^\circ\text{C}$	20A
I_D	Continuous Drain Current @ $T_C = 100^\circ\text{C}$	20A
I_{DM}	Pulsed Drain Current	128A
P_D	Power Dissipation @ $T_C = 25^\circ\text{C}$	60W
	Linear Derating Factor	0.48W/°C
T_J, T_{stg}	Operating and Storage Temperature Range	-55 to 150°C
$R_{\theta JC}$	Thermal Resistance Junction to Case	2.1°C/W max.
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	80°C/W max.

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
STATIC ELECTRICAL RATINGS					
BV_{DSS}	Drain – Source Breakdown Voltage	$V_{GS} = 0$	$I_D = 1\text{mA}$	60	V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Temperature Coefficient of Breakdown Voltage	Reference to 25°C $I_D = 1\text{mA}$		0.68	$\text{V}/^\circ\text{C}$
$R_{DS(on)}$	Static Drain – Source On–State Resistance	$V_{GS} = 10\text{V}$	$I_D = 20\text{A}$		0.035 Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$	$I_D = 250\mu\text{A}$	2	4 V
g_{fs}	Forward Transconductance	$V_{DS} \geq 15\text{V}$	$I_D = 20\text{A}$	17	$\text{S}(\bar{\nu})$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{GS} = 0$	$V_{DS} = 0.8BV_{DSS}$ $T_J = 125^\circ\text{C}$		25 μA 250 μA
I_{GSS}	Forward Gate – Source Leakage	$V_{GS} = 20\text{V}$			100 nA
I_{GSS}	Reverse Gate – Source Leakage	$V_{GS} = -20\text{V}$			-100 nA
DYNAMIC CHARACTERISTICS					
C_{iss}	Input Capacitance	$V_{GS} = 0$		2400	pF
C_{oss}	Output Capacitance	$V_{DS} = 25\text{V}$		1100	
C_{rss}	Reverse Transfer Capacitance	$f = 1\text{MHz}$		230	
Q_g	Total Gate Charge	$V_{GS} = 10\text{V}$		39	nC
Q_{gs}	Gate – Source Charge	$I_D = 20\text{A}$		6.7	
Q_{gd}	Gate – Drain (“Miller”) Charge	$V_{DS} = 0.5BV_{DSS}$		18	
$t_{d(on)}$	Turn–On Delay Time	$V_{GS} = 10\text{V}$			ns
t_r	Rise Time	$V_{DD} = 30\text{V}$			
$t_{d(off)}$	Turn–Off Delay Time	$I_D = 20\text{A}$			
t_f	Fall Time	$R_G = 9.1\Omega$			
SOURCE – DRAIN DIODE CHARACTERISTICS					
I_S	Continuous Source Current				20 A
I_{SM}	Pulse Source Current				128 A
V_{SD}	Diode Forward Voltage	$I_S = 20\text{A}$	$T_J = 25^\circ\text{C}$		2.5 V
t_{rr}	Reverse Recovery Time	$I_F = 20\text{A}$	$T_J = 25^\circ\text{C}$		220 ns
Q_{rr}	Reverse Recovery Charge	$d_i / d_t \leq 100\text{A}/\mu\text{s}$ $V_{DD} \leq 50\text{V}$			1.6 μC
PACKAGE CHARACTERISTICS					
L_D	Internal Drain Inductance (from 6mm down drain lead pad to centre of die)			8.7	nH
L_S	Internal Source Inductance (from 6mm down source lead to centre of source bond pad)			8.7	



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.