International Rectifier

PD - 9.1137

IRGPH20M

INSULATED GATE BIPOLAR TRANSISTOR

Short Circuit Rated
Fast IGBT

Features

- Short circuit rated - 10µs @ 125°C, V_{GE} = 15V
- Switching-loss rating includes all "tail" losses
- Optimized for medium operating frequency (1 to 10kHz) See Fig. 1 for Current vs. Frequency curve



n-channel

V_{CES} = 1200V

$V_{CE(sat)} \leq$ 4.6V

@V_{GE} = 15V, I_C = 4.5A

Description

Insulated Gate Bipolar Transistors (IGBTs) from International Rectifier have higher usable current densities than comparable bipolar transistors, while at the same time having simpler gate-drive requirements of the familiar power MOSFET. They provide substantial benefits to a host of high-voltage, high-current applications.

These new short circuit rated devices are especially suited for motor control and other applications requiring short circuit withstand capability.



TO-247AC

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Voltage	1200	V
I_C @ T_C = 25°C	Continuous Collector Current	6.9	A
I_C @ T_C = 100°C	Continuous Collector Current	4.5	
I_{CM}	Pulsed Collector Current ①	14	
I_{LM}	Clamped Inductive Load Current ②	14	
t_{sc}	Short Circuit Withstand Time	10	µs
V_{GE}	Gate-to-Emitter Voltage	±20	V
E_{ARV}	Reverse Voltage Avalanche Energy ③	5.0	mJ
P_D @ T_C = 25°C	Maximum Power Dissipation	60	W
P_D @ T_C = 100°C	Maximum Power Dissipation	24	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +150	°C
	Soldering Temperature, for 10 sec.	300 (0.063 in. (1.6mm) from case)	
	Mounting torque, 6-32 or M3 screw.	10 lbf•in (1.1N•m)	

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	—	2.1	°C/W
$R_{\theta CS}$	Case-to-Sink, flat, greased surface	—	0.24	—	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	—	—	40	
Wt	Weight	—	6 (0.21)	—	g (oz)

Revision 1

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage	1200	—	—	V	V_{GE} = 0V, I_C = 250µA
$V_{(BR)ECS}$	Emitter-to-Collector Breakdown Voltage ④	20	—	—	V	V_{GE} = 0V, I_C = 1.0A
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	—	1.3	—	V/°C	V_{GE} = 0V, I_C = 1.0mA
$V_{CE(on)}$	Collector-to-Emitter Saturation Voltage	—	3.1	4.6	V	I_C = 4.5A, V_{GE} = 15V
		—	3.9	—		I_C = 6.9A, See Fig. 2, 5
		—	4.0	—		I_C = 4.5A, T_J = 150°C
$V_{GE(th)}$	Gate Threshold Voltage	3.0	—	5.5		V_{CE} = V_{GE}, I_C = 250µA
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	—	-11	—	mV/°C	V_{CE} = V_{GE}, I_C = 250µA
g_{fe}	Forward Transconductance ⑤	1.3	2.6	—	S	V_{CE} = 100V, I_C = 4.5A
I_{CES}	Zero Gate Voltage Collector Current	—	—	250	µA	V_{GE} = 0V, V_{CE} = 1200V
		—	—	1000		V_{GE} = 0V, V_{CE} = 1200V, T_J = 150°C
I_{GES}	Gate-to-Emitter Leakage Current	—	—	±100	nA	V_{GE} = ±20V

Switching Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	—	16	24	nC	I_C = 4.5A
Q_{ge}	Gate - Emitter Charge (turn-on)	—	4.4	7.0		V_{CC} = 400V See Fig. 8
Q_{gc}	Gate - Collector Charge (turn-on)	—	5.5	8.3		V_{GE} = 15V
$t_{d(on)}$	Turn-On Delay Time	—	26	—	ns	T_J = 25°C
t_r	Rise Time	—	13	—		I_C = 4.5A, V_{CC} = 960V
$t_{d(off)}$	Turn-Off Delay Time	—	43	65		V_{GE} = 15V, R_G = 50Ω
t_f	Fall Time	—	430	640		Energy losses include "tail"
E_{on}	Turn-On Switching Loss	—	0.33	—	mJ	
E_{off}	Turn-Off Switching Loss	—	0.78	—		See Fig. 9, 10, 11, 14
E_{ts}	Total Switching Loss	—	1.1	1.7		
t_{sc}	Short Circuit Withstand Time	10	—	—	µs	V_{CC} = 720V, T_J = 125°C V_{GE} = 15V, R_G = 50Ω, V_{CPK} < 1000V
$t_{d(on)}$	Turn-On Delay Time	—	32	—	ns	T_J = 150°C,
t_r	Rise Time	—	20	—		I_C = 4.5A, V_{CC} = 960V
$t_{d(off)}$	Turn-Off Delay Time	—	480	—		V_{GE} = 15V, R_G = 50Ω
t_f	Fall Time	—	450	—		Energy losses include "tail"
E_{ts}	Total Switching Loss	—	2.4	—	mJ	See Fig. 10, 14
L_E	Internal Emitter Inductance	—	13	—	nH	Measured 5mm from package
C_{ies}	Input Capacitance	—	340	—	pF	V_{GE} = 0V
C_{oes}	Output Capacitance	—	25	—		V_{CC} = 30V See Fig. 7
C_{res}	Reverse Transfer Capacitance	—	4.7	—		f = 1.0MHz

Notes:

① Repetitive rating; V_{GE}=20V, pulse width limited by max. junction temperature. (See fig. 13b)

② V_{CC}=80%(V_{CES}), V_{GE}=20V, L=10µH, R_G= 50Ω, (See fig. 13a)

③ Repetitive rating; pulse width limited by maximum junction temperature.

④ Pulse width ≤ 80µs; duty factor ≤ 0.1%.

⑤ Pulse width 5.0µs, single shot.

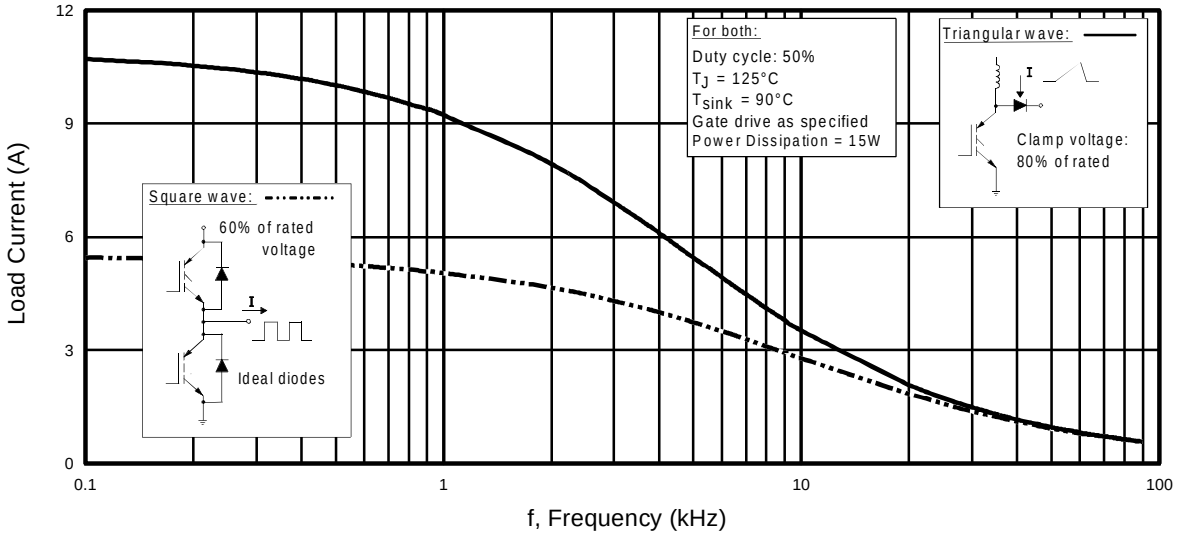

Fig. 1 - Typical Load Current vs. Frequency
(For square wave, $I=I_{RMS}$ of fundamental; for triangular wave, $I=I_{PK}$)

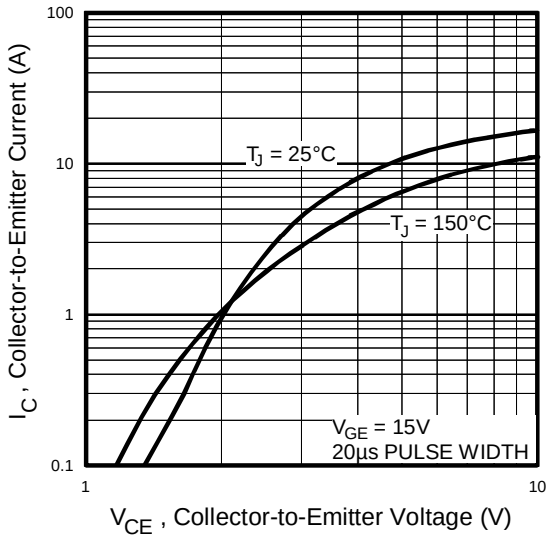

Fig. 2 - Typical Output Characteristics

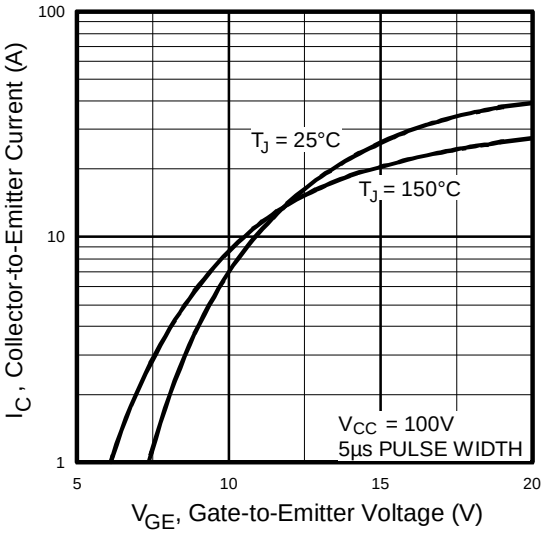

Fig. 3 - Typical Transfer Characteristics

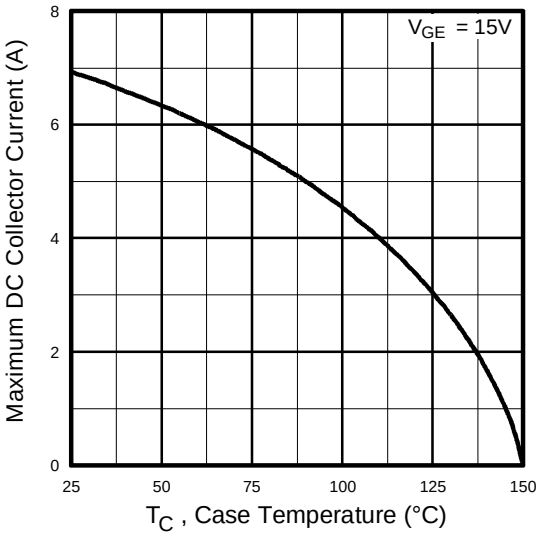

Fig. 4 - Maximum Collector Current vs. Case Temperature

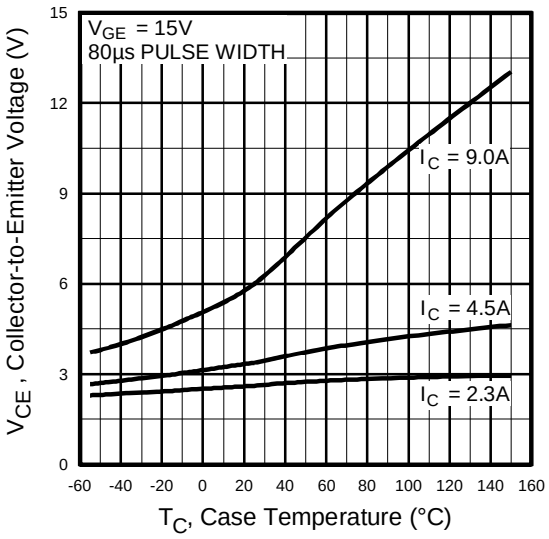

Fig. 5 - Collector-to-Emitter Voltage vs. Case Temperature

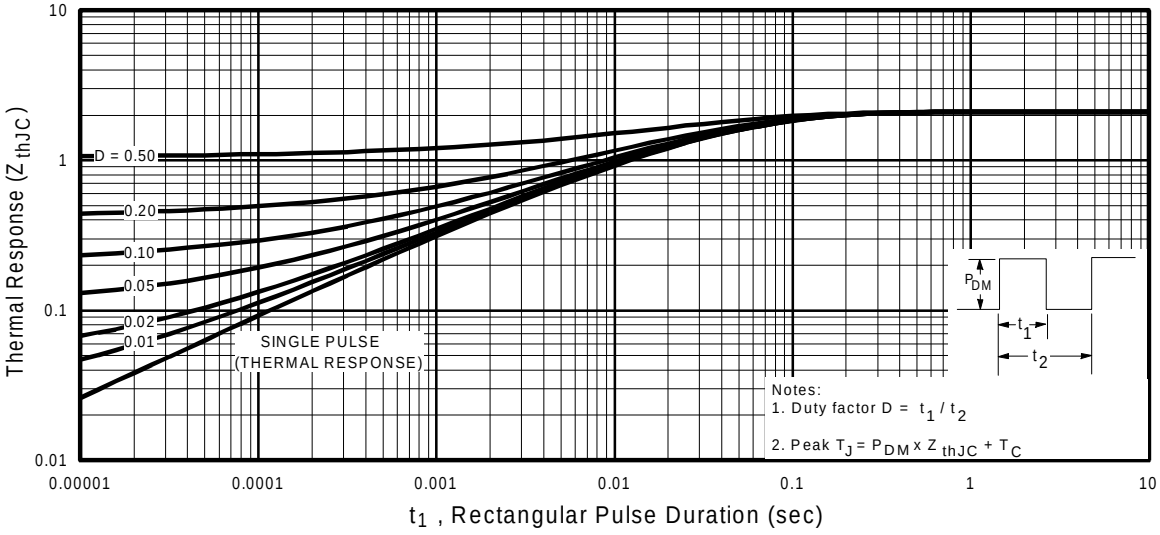

Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

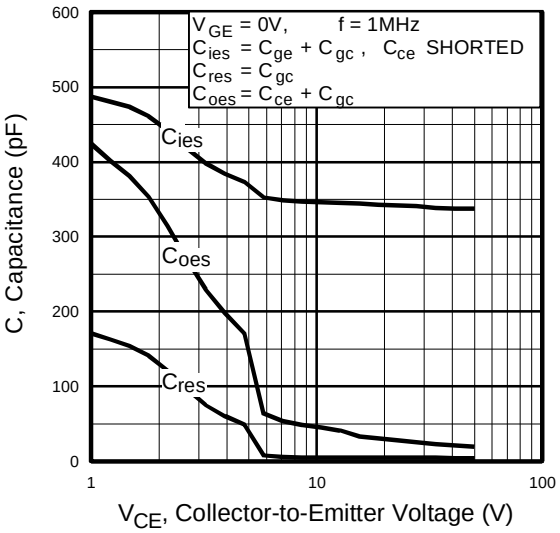

Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

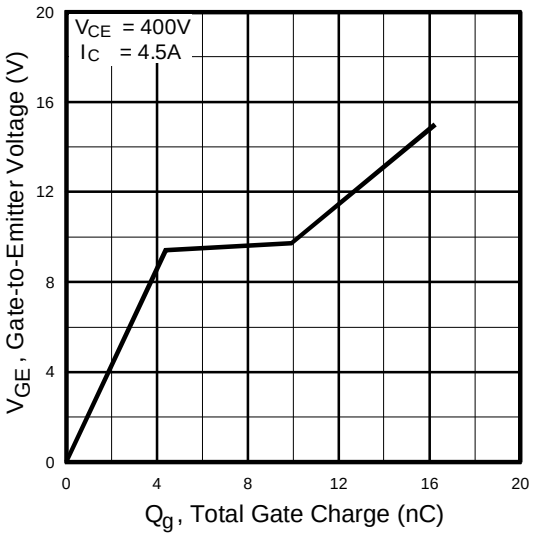

Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

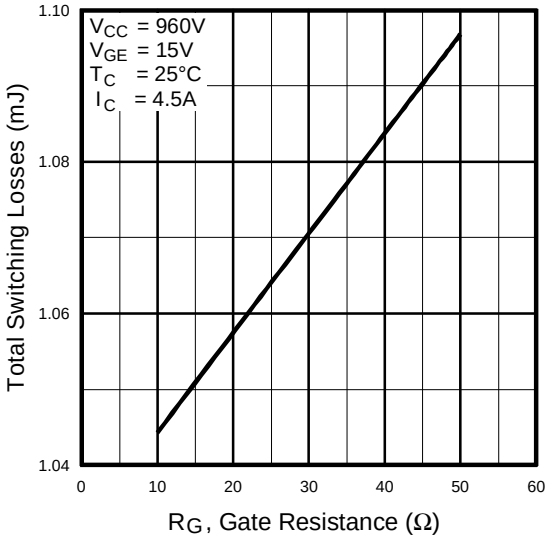

Fig. 9 - Typical Switching Losses vs. Gate Resistance

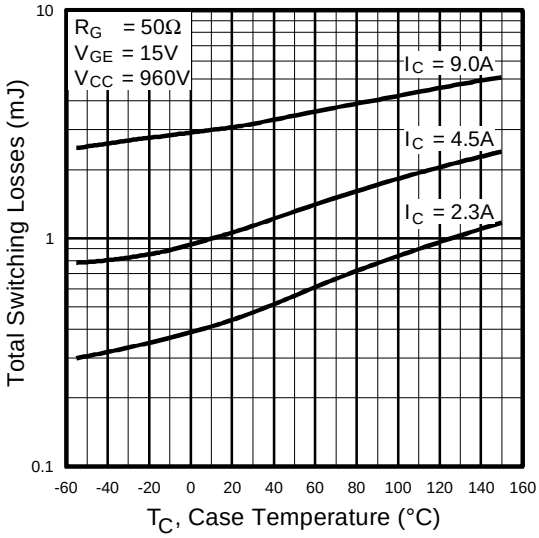

Fig. 10 - Typical Switching Losses vs. Case Temperature

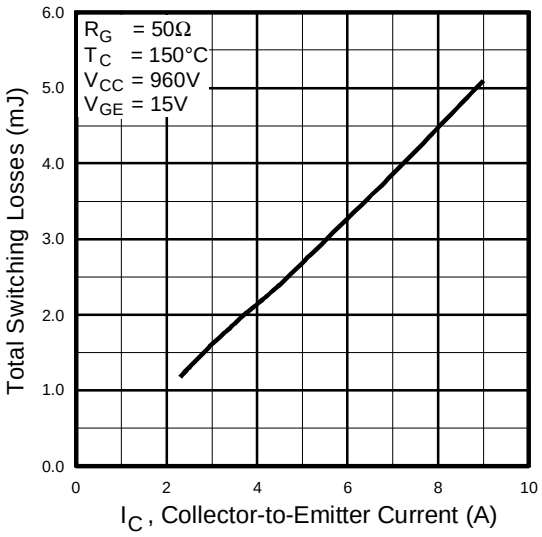

Fig. 11 - Typical Switching Losses vs. Collector-to-Emitter Current

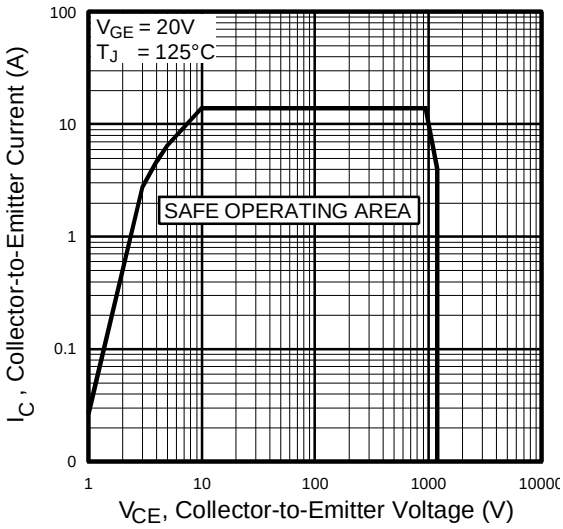

Fig. 12 - Turn-Off SOA

Refer to Section D for the following:

Appendix G: Section D - page D-9

Fig. 13a - Clamped Inductive Load Test Circuit
Fig. 13b - Pulsed Collector Current Test Circuit
Fig. 14a - Switching Loss Test Circuit
Fig. 14b - Switching Loss Waveform

Package Outline 3 - JEDEC Outline TO-247AC **Section D - page D-13**

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.