

FAST RECOVERY DIODE

Features

- Ultra small package, possible for 5mm pitch automatic insertion.
- High speed switching.
- High reliability.

Applications

- High speed switching.

Maximum Ratings and Characteristics


- Absolute Maximum Ratings

Item	Symbol	Conditions	Rating			Unit
			- 2	- 4	- 6	
Repetitive peak reverse voltage	V_{RRM}		200	400	600	V
Repetitive peak surge reverse voltage	V_{RSM}		200	400	600	V
Average output current	I_O	Resistive load $T_I=138^{\circ}\text{C}$	1.0			A
Suege current	I_{FSM}	Sine wave 10ms	25			A
Operating junction temperature	T_j		-40 to +150			$^{\circ}\text{C}$
Storage temperature	T_{stg}		-40 to +150			$^{\circ}\text{C}$


- Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_F	$I_F=1.0\text{A}$	1.3	V
Reverse current	I_R	$V_R=V_{RRM}$	5.0	μA
Reverse recovery time	t_{rr}	$I_F=0.1\text{A}, I_R=0.1\text{A}, I_{rec}=0.01\text{A}$	0.4	μs

Outline Drawings, mm

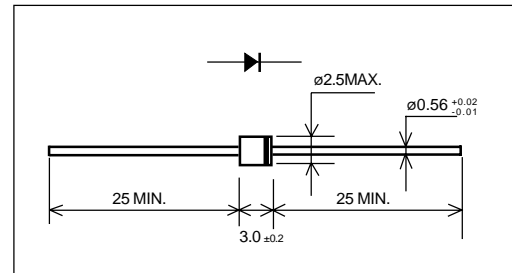

Marking

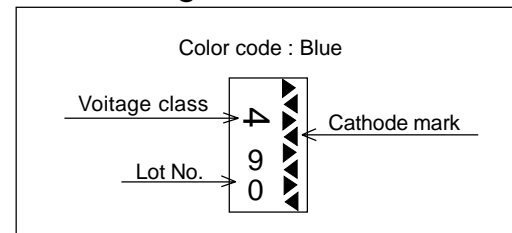



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.