


HiPerFAST™ IGBT with HiPerFRED

IXGN 50N60BD2
IXGN 50N60BD3

$V_{CES} = 600 \text{ V}$
 $I_{C25} = 75 \text{ A}$
 $V_{CE(sat)} = 2.5 \text{ V}$
 $t_{fi} = 150 \text{ ns}$


Buck & boost configurations

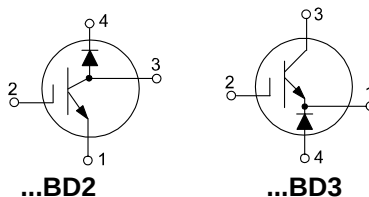

	Symbol	Test Conditions	Maximum Ratings	
IGBT	V_{CES}	$T_J = 25^\circ\text{C}$ to 150°C	600	V
	V_{CGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GE} = 1 \text{ M}\Omega$	600	V
	V_{GES}	Continuous	± 20	V
	V_{GEM}	Transient	± 30	V
	I_{C25}	$T_C = 25^\circ\text{C}$	75	A
	I_{C90}	$T_C = 90^\circ\text{C}$	50	A
	I_{CM}	$T_C = 25^\circ\text{C}$, 1 ms	200	A
	SSOA (RBSOA)	$V_{GE} = 15 \text{ V}$, $T_{VJ} = 125^\circ\text{C}$, $R_G = 10 \Omega$ Clamped inductive load, $L = 30 \mu\text{H}$	$I_{CM} = 100$ @ $0.8 V_{CES}$	A
Diode	P_C	$T_C = 25^\circ\text{C}$	250	W
	V_{RRM}		600	V
	I_{FAVM}	$T_C = 70^\circ\text{C}$; rectangular, $d = 50\%$	60	A
	I_{FRM}	$t_p \leq 10 \text{ ms}$; pulse width limited by T_J	600	A
	P_D	$T_C = 25^\circ\text{C}$	150	W
Case	T_J		-40 ... +150	$^\circ\text{C}$
	T_{JM}		150	$^\circ\text{C}$
	T_{stg}		-40 ... +150	$^\circ\text{C}$
	M_d	Mounting torque	1.5/13	Nm/lb.in.
		Terminal connection torque (M4)	1.5/13	Nm/lb.in.
	Weight		30	g
		Maximum lead temperature for soldering 1.6 mm (0.062 in.) from case for 10 s	300	$^\circ\text{C}$

SOT-227B, miniBLOC

 **E 153432**



IXGN50N60BD2

1 = Emitter; 2 = Gate
3 = Collector; 4 = Diode cathode

IXGN50N60BD3

1 = Emitter/Diode Cathode; 2 = Gate
3 = Collector; 4 = Diode anode

Features

- International standard package miniBLOC
- Aluminium nitride isolation
 - high power dissipation
- Isolation voltage 3000 V~
- Very high current, fast switching IGBT & FRED diode
- MOS Gate turn-on
 - drive simplicity
- Low collector-to-case capacitance
- Low package inductance ($< 10 \text{ nH}$)
 - easy to drive and to protect
- Molding epoxies meet UL 94 V-0 flammability classification

Applications

- AC motor speed control
- DC servo and robot drives
- DC choppers
- Buck converters


Advantages

- Easy to mount with 2 screws
- Space savings
- High power density

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
BV_{CES}	$I_C = 250 \mu\text{A}$, $V_{GE} = 0 \text{ V}$	600		V
$V_{GE(th)}$	$I_C = 250 \mu\text{A}$, $V_{CE} = V_{GE}$	2.5		5 V
I_{CES}	$V_{CE} = 0.8 \cdot V_{CES}$ $V_{GE} = 0 \text{ V}$			$T_J = 25^\circ\text{C}$: 200 μA $T_J = 125^\circ\text{C}$: 1 mA
I_{GES}	$V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$			$\pm 100 \text{ nA}$
$V_{CE(sat)}$	$I_C = I_{C90}$, $V_{GE} = 15 \text{ V}$			2.5 V

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
g_{fs}	$I_C = I_{C90}, V_{CE} = 10\text{ V}$, Pulse test, $t \leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$	35	50	S
C_{ies}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		4100	pF
C_{oes}			290	pF
C_{res}			50	pF
Q_g	$I_C = I_{C90}, V_{GE} = 15\text{ V}$, $V_{CE} = 0.5 V_{CES}$		110	nC
Q_{ge}			30	nC
Q_{gc}			35	nC
$t_{d(on)}$	Inductive load, $T_J = 25^\circ\text{C}$ $I_C = I_{C90}, V_{GE} = 15\text{ V}$, $L = 100\text{ }\mu\text{H}$, $V_{CE} = 0.8 V_{CES}, R_G = R_{off} = 2.7\text{ }\Omega$ Remarks: Switching times may increase for $V_{CE}(\text{Clamp}) > 0.8 \cdot V_{CES}$, higher T_J or increased R_G		50	ns
t_{ri}			50	ns
$t_{d(off)}$			110	250 ns
t_{fi}			150	220 ns
E_{off}			3.0	4.0 mJ
$t_{d(on)}$			50	ns
t_{ri}	Inductive load, $T_J = 125^\circ\text{C}$ $I_C = I_{C90}, V_{GE} = 15\text{ V}$, $L = 100\text{ }\mu\text{H}$, $V_{CE} = 0.8 V_{CES}, R_G = R_{off} = 2.7\text{ }\Omega$ Remarks: Switching times may increase for $V_{CE}(\text{Clamp}) > 0.8 \cdot V_{CES}$, higher T_J or increased R_G		60	ns
E_{on}			3.0	mJ
$t_{d(off)}$			200	ns
t_{fi}			250	ns
E_{off}			4.2	mJ
R_{thJC}				0.50 K/W
R_{thCK}		0.05		K/W

miniBLOC, SOT-227 B



M4 screws (4x) supplied

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	38.00	38.23	1.496	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.05	0.1	-0.002	0.004

Reverse Diode (FRED) Characteristic Values

($T_J = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Test Conditions	typ.	max.
I_R	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$		650 μA
	$T_{VJ} = 150^\circ\text{C}$		2.5 mA
V_F	$I_F = 60\text{ A}$, $T_{VJ} = 150^\circ\text{C}$		1.75 V
	Pulse test, $t \leq 300\text{ }\mu\text{s}$, duty cycle $d \leq 2\%$ $T_{VJ} = 25^\circ\text{C}$		2.40 V
I_{RM}	$I_F = I_{C90}, V_{GE} = 0\text{ V}$, $-di_F/dt = 100\text{ A}/\mu\text{s}$ $V_R = 540\text{ V}$		8.0 A
t_{rr}	$I_F = 1\text{ A}$, $-di_F/dt = 50\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$ $T_J = 25^\circ\text{C}$	35	ns
R_{thJC}			0.85 K/W

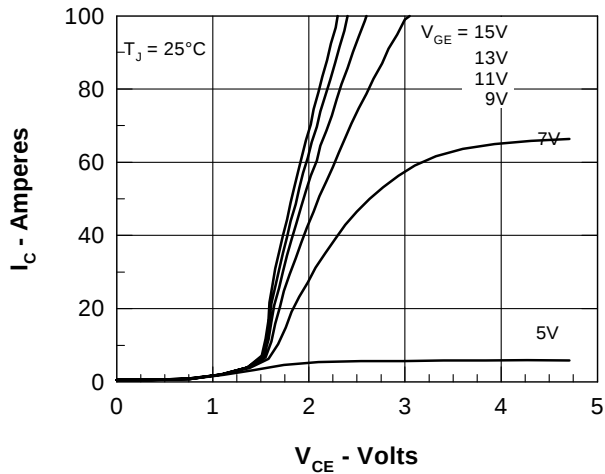


Fig. 1. Saturation Voltage Characteristics

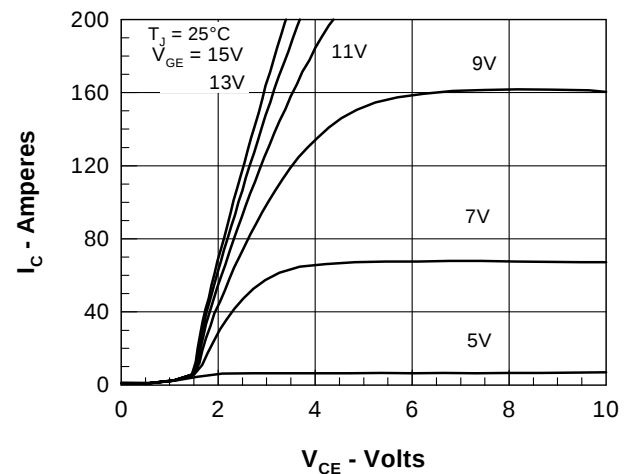


Fig. 2. Extended Output Characteristics

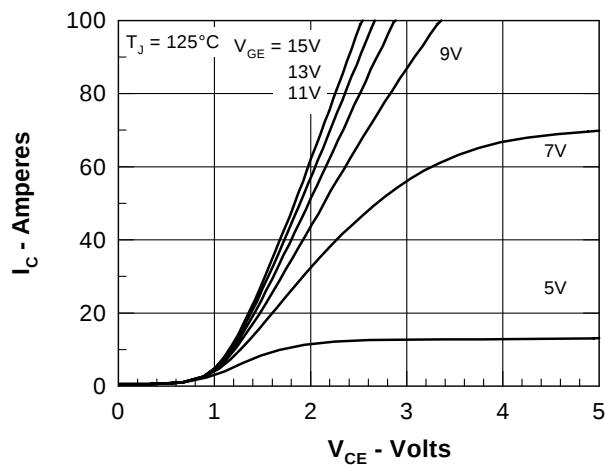


Fig. 3. Saturation Voltage Characteristics

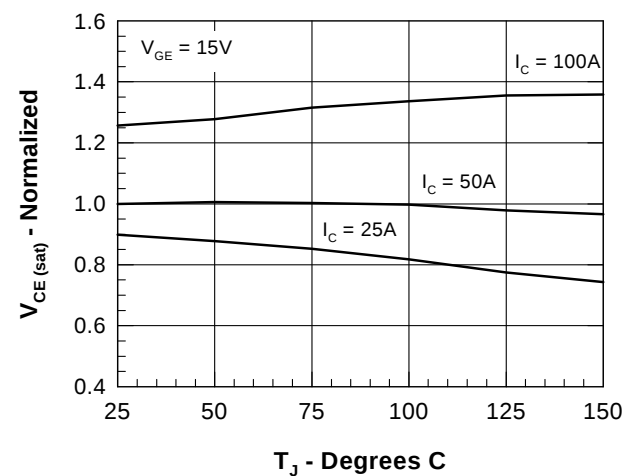


Fig. 4. Temperature Dependence of $V_{CE(sat)}$

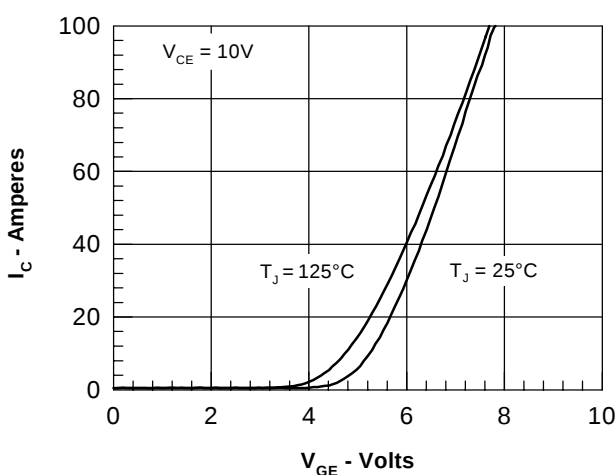


Fig. 5. Saturation Voltage Characteristics

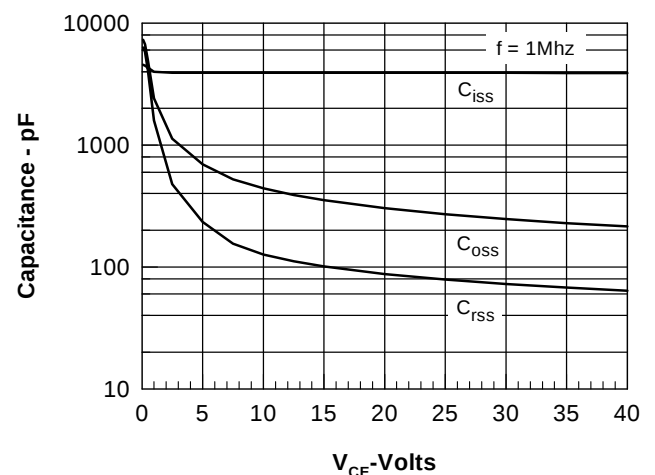
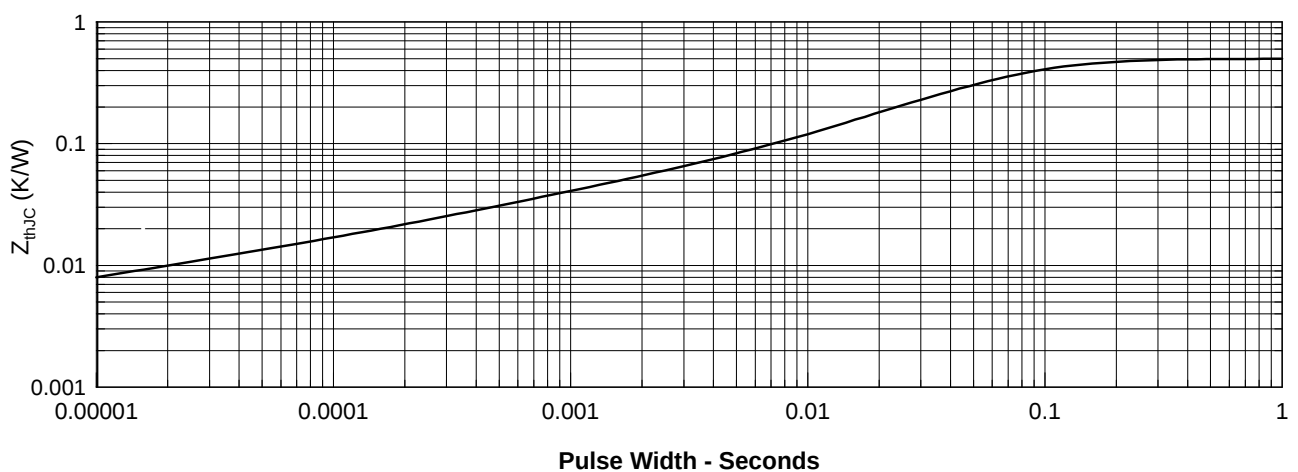
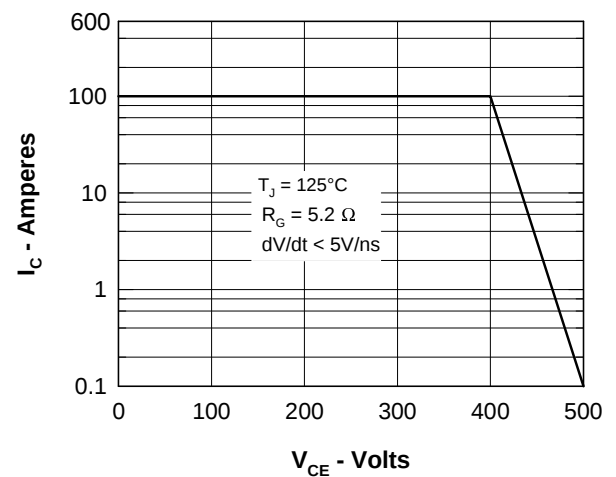
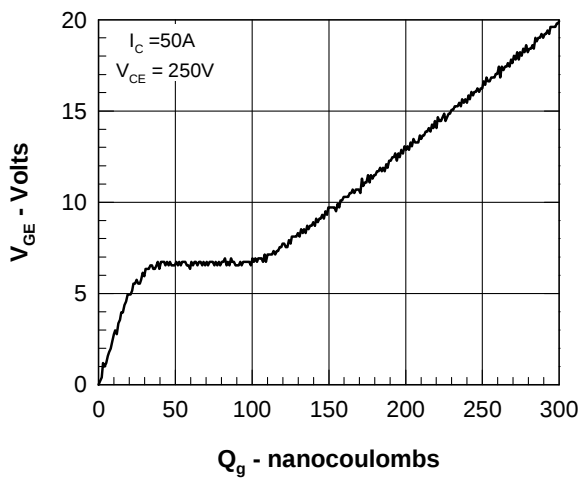
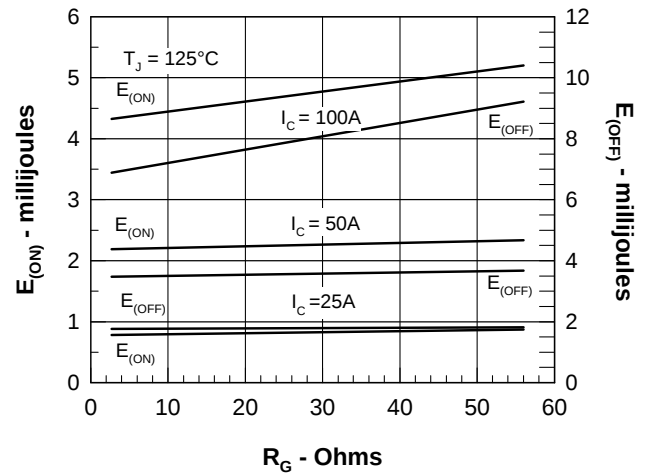
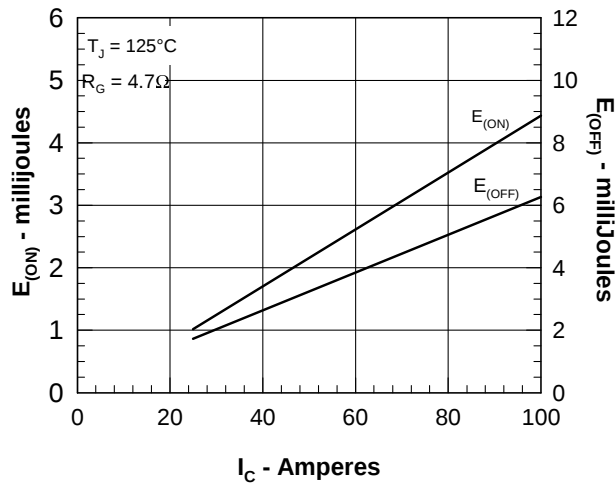


Fig. 6. Junction Capacitance Curves



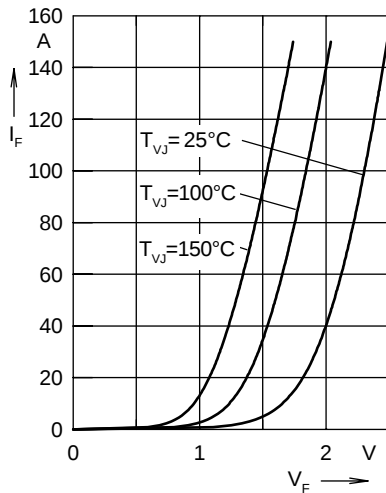


Fig. 12 Forward current I_F versus V_F

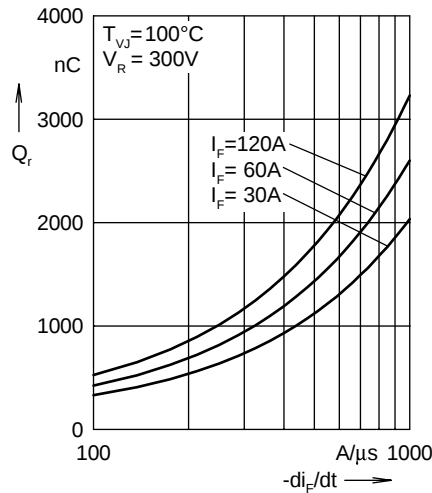


Fig. 13 Reverse recovery charge Q_r versus $-di_F/dt$

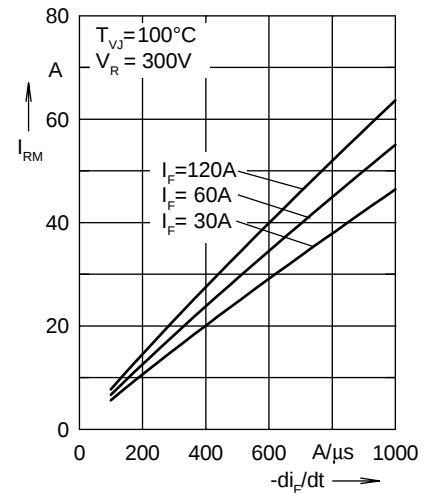


Fig. 14 Peak reverse current I_{RM} versus $-di_F/dt$

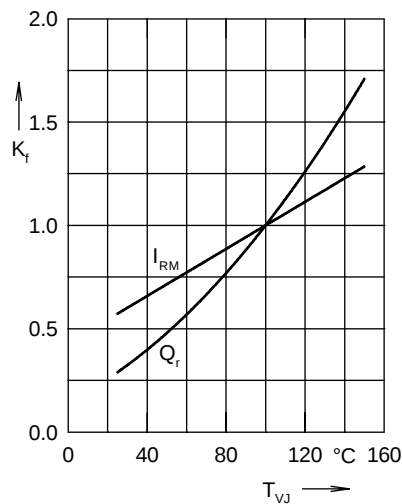


Fig. 15 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

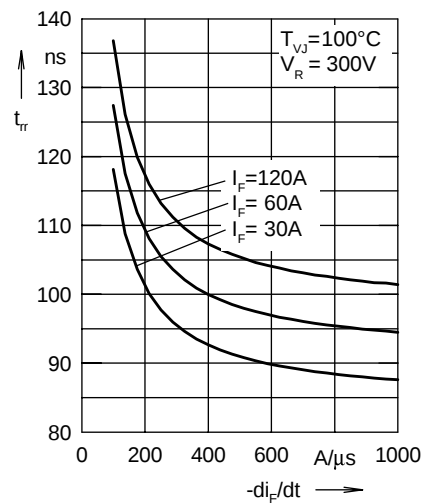


Fig. 16 Recovery time t_{rr} versus $-di_F/dt$

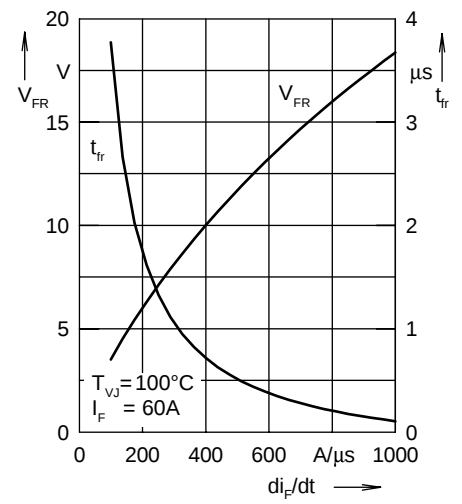


Fig. 17 Peak forward voltage V_{FR} and t_{fr} versus di_F/dt

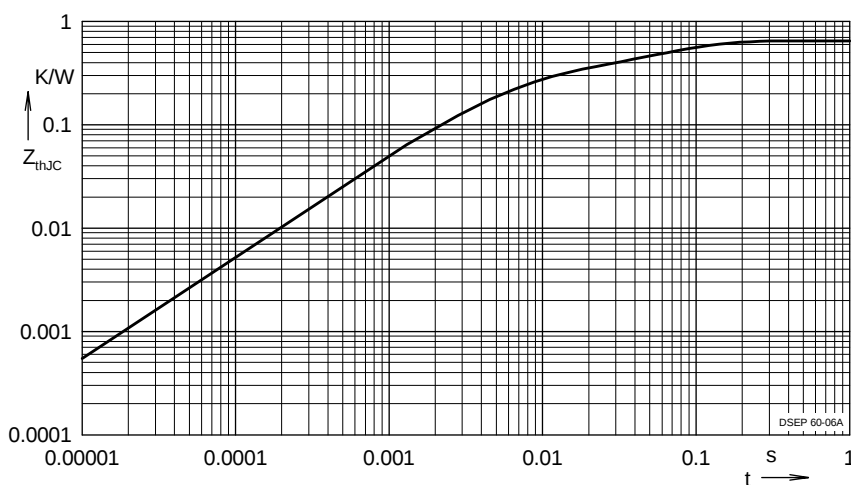


Fig. 18 Transient thermal resistance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.324	0.0052
2	0.125	0.0003
3	0.201	0.0385



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.