

GENERAL PURPOSE APPLICATION.
HIGH VOLTAGE APPLICATION.


FEATURES

- High Collector Breakdwon Voltage
: $V_{CBO} = -130V$, $V_{CEO} = -120V$
- Low Leakage Current.
: $I_{CBO} = -100nA(\text{Max.}) @ V_{CB} = -100V$
- Low Saturation Voltage
: $V_{CE(\text{sat})} = -0.5V(\text{Max.}) @ I_C = -50mA, I_B = -5mA$
- Low Noise : $NF = 8dB(\text{Max.})$


MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-130	V
Collector-Emitter Voltage	V_{CEO}	-120	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-600	mA
Base Current	I_B	-100	mA
Collector Power Dissipation	P_C^*	350	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

Note : * Package Mounted On 99.5% Alumina $10 \times 8 \times 0.6mm$)

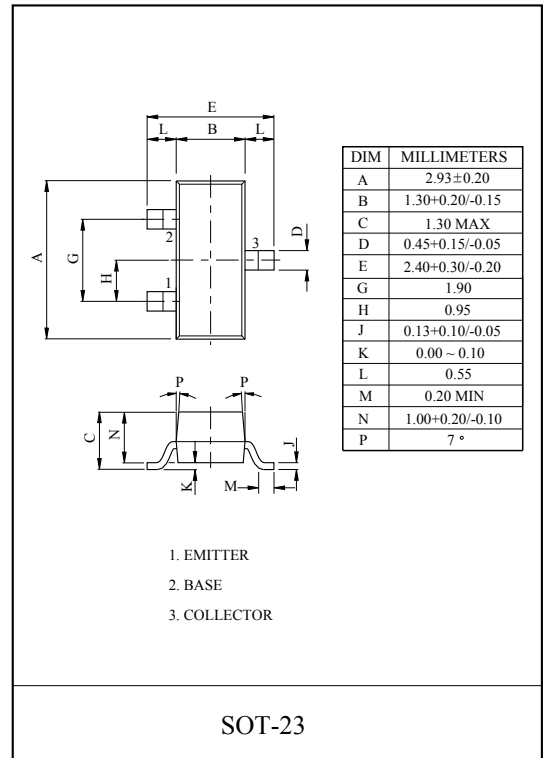

Marking

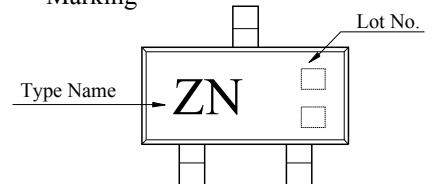

2N5400S

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=-100V, I_E=0$	-	-	-100	nA
		$V_{CB}=-100V, I_E=0, T_a=100^\circ C$	-	-	-100	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=-3V, I_C=0$	-	-	-50	nA
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-0.1mA, I_E=0$	-130	-	-	V
Collector-Emitter Breakdown Voltage *	$V_{(BR)CEO}$	$I_C=-1mA, I_B=0$	-120	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-5	-	-	V
DC Current Gain *	$h_{FE(1)}$	$V_{CE}=-5V, I_C=-1mA$	30	-	-	
	$h_{FE(2)}$	$V_{CE}=-5V, I_C=-10mA$	40	-	180	
	$h_{FE(3)}$	$V_{CE}=-5V, I_C=-50mA$	40	-	-	
Collector-Emitter Saturation Voltage *	$V_{CE(sat)1}$	$I_C=-10mA, I_B=-1mA$	-	-	-0.2	V
	$V_{CE(sat)2}$	$I_C=-50mA, I_B=-5mA$	-	-	-0.5	
Base-Emitter Saturation Voltage *	$V_{BE(sat)1}$	$I_C=-10mA, I_B=-1mA$	-	-	-1.0	V
	$V_{BE(sat)2}$	$I_C=-50mA, I_B=-5mA$	-	-	-1.0	
Transition Frequency	f_T	$V_{CE}=-10V, I_C=-10mA, f=100MHz$	100	-	400	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$	-	-	6	pF
Small-Signal Current Gain	h_{fe}	$V_{CE}=-10V, I_C=-1mA, f=1kHz$	30	-	200	
Noise Figure	NF	$V_{CE}=-5V, I_C=-250\mu A$ $R_g=1k\Omega, f=10Hz \sim 15.7kHz$	-	-	8	dB

* Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.