




GERMANIUM TUNNEL DIODE

DESCRIPTION:

The **1N2927** is Designed for Switching Applications in Industrial and Military Applications.

MAXIMUM RATINGS

I_F	500 μ A
T_J	-65 °C to +150 °C
T_{STG}	-65 °C to +200 °C
T_{SOLD}	10 S/250 °C

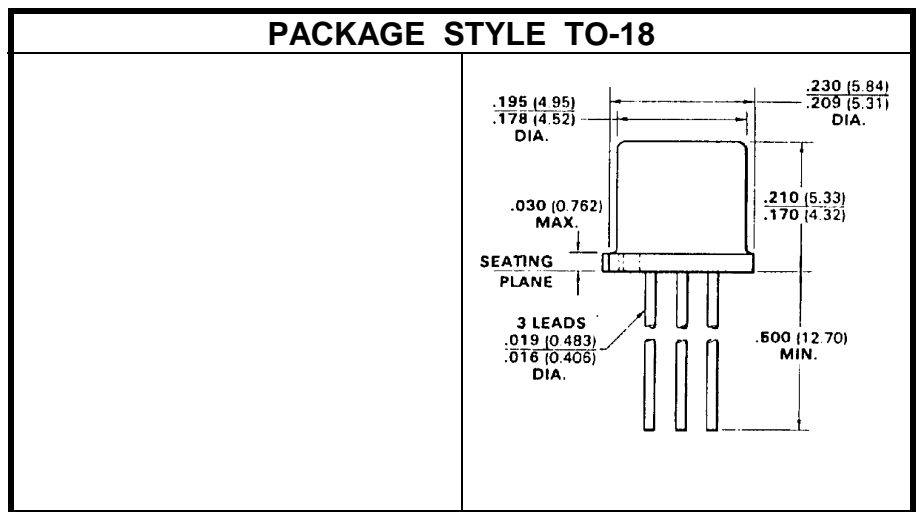

CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
I_P		90		110	μ A
I_V				35	μ A
V_P				75	mV
V_V				475	mV
V_F	$I_F = 110 \mu\text{A}$	600		1000	mV
I_R				1.0	mA

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.