


8 A(12 A_{r.m.s.}) THYRISTOR

PACKAGE DIMENSIONS
in millimeters

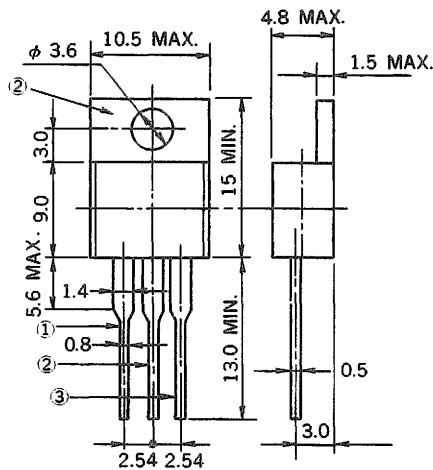

Pin Connection

- ① Cathode
- ② Anode
- ③ Gate

The 8P2M and 8P4M are P gate all diffused mold type Thyristor granted 8 Amp On-state Average Current ($T_c = 90^\circ\text{C}$), with voltages up to 400 volts.

FEATURES

- Easy installation by TO-220 AB package.
- 100 A surge current.
- High Voltage.
 - : $V_{DRM}, V_{RRM} = 200\text{ V}$ (8P2M)
 - : $V_{DRM}, V_{RRM} = 400\text{ V}$ (8P4M)

APPLICATIONS

- Motor speed control for household appliance.
- Temperature control for heater and constant temperature box.
- Constant voltage power source and battery charger.
- Automotive application such as regulator.
- Various solid state relay etc.

MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	8P2M	8P4M	UNIT	NOTE
Non-Repetitive Peak Reverse Voltage	V_{RSM}	300	500	V	
Non-Repetitive Peak Off-State Voltage	V_{DSM}	300	500	V	
Repetitive Peak Reverse Voltage	V_{RRM}	200	400	V	
Repetitive Peak Off-State Voltage	V_{DRM}	200	400	V	
Average On-State Current	$I_{T(AV)}$	8 ($T_c = 90^\circ\text{C}, \theta = 180^\circ$ Single phase half wave)		A	See Fig. 11
Surge On-State Current	I_{TSM}	100		A	See Fig. 2
Fusing Current	$\int i_T^2 dt$	45 ($1\text{ ms} \leq t \leq 10\text{ ms}$)		A^2s	
Peak Gate Power Dissipation	P_{GM}	5 ($f \geq 50\text{ Hz}, \text{Duty} \leq 10\%$)		W	See Fig. 3
Average Gate Power Dissipation	$P_{G(AV)}$	0.5		W	
Peak Gate Forward Current	I_{FGM}	2 ($f \geq 50\text{ Hz}, \text{Duty} \leq 10\%$)		A	
Peak Gate Reverse Voltage	V_{RGM}	10		V	
Junction Temperature	T_j	-40 to +125		$^\circ\text{C}$	
Storage Temperature	T_{stg}	-55 to +150		$^\circ\text{C}$	
Weight		2		g	

NEC cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement.

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Repetitive Peak Reverse Current	I_{RRM}	$V_{RM} = V_{RRM}, T_j = 125^\circ\text{C}$	—	—	2	mA	
Repetitive Peak Off-State Current	I_{DRM}	$V_{DM} = V_{DRM}, T_j = 125^\circ\text{C}$	—	—	2	mA	
On-State Voltage	V_{TM}	$I_{TM} = 25\text{ A}$	—	—	1.4	V	See Fig. 1
Gate-Trigger Current	I_{GT}	$V_{DM} = 6\text{ V}, R_L = 100\ \Omega$	—	—	10	mA	See Fig. 4
Gate-Trigger Voltage	V_{GT}	$V_{DM} = 6\text{ V}, R_L = 100\ \Omega$	—	—	1.5	V	
Gate Non-Trigger Voltage	V_{GD}	$V_{DM} = 1/2 V_{DRM}, T_j = 125^\circ\text{C}$	0.2	—	—	V	
Critical Rate of Rise of Off-State Voltage	dv/dt	$V_{DM} = V_{DRM}, T_j = 125^\circ\text{C}$	—	40	—	V/ μs	
Holding Current	I_H	$V_D = 24\text{ V}$	—	6	—	mA	
Circuit Commuted Turn-Off Time	t_d	$I_{TM} = 5\text{ A}, V_R \geq 25\text{ V}$ $V_{DM} = 2/3 V_{DRM}, diR/dt = 15\text{ A}/\mu\text{s}$ $dv/dt = 10\text{ V}/\mu\text{s}, T_j = 125^\circ\text{C}$	—	100	—	μs	
Thermal Resistance	R_{th}	Junction to case	—	—	3	$^\circ\text{C}/\text{W}$	See Fig. 13

Fig. 1 $i_T - V_T$ CHARACTERISTIC

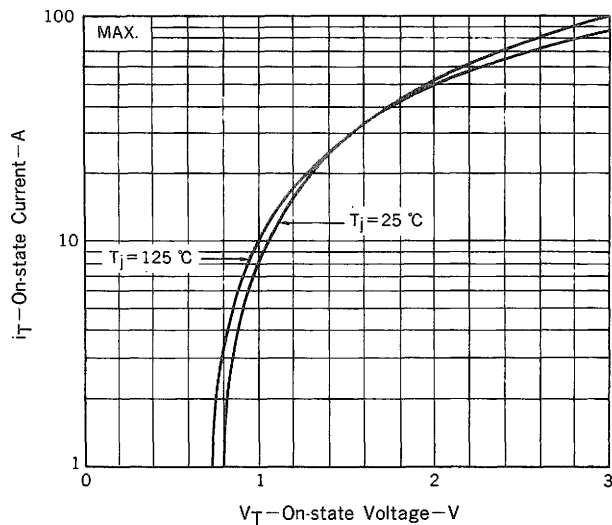


Fig. 2 I_{TSM} RATING

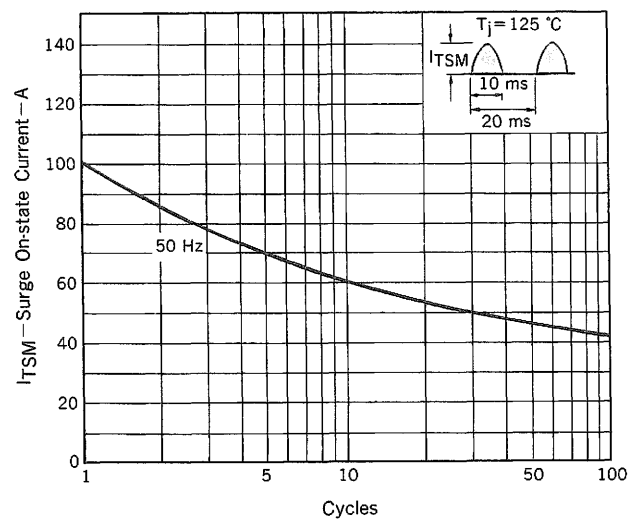


Fig. 3 GATE POWER RATING

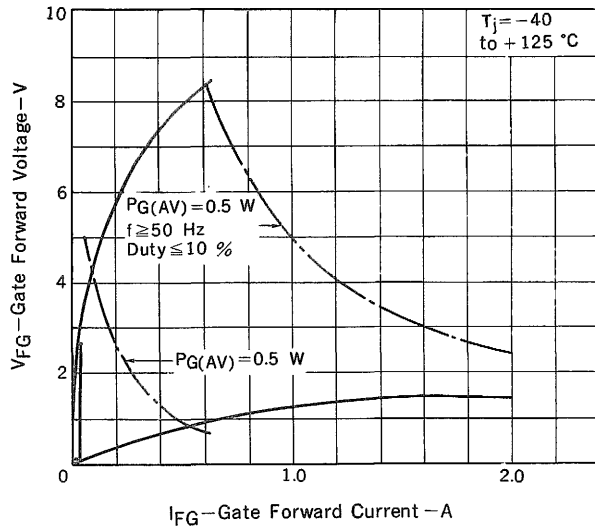


Fig. 4 $I_{GT} - V_{GT}$ DISTRIBUTION

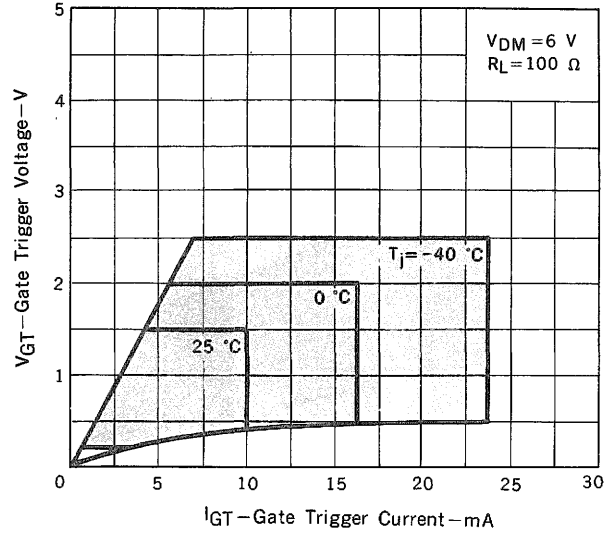


Fig. 5 $I_{GT} - T_a$ TYPICAL DISTRIBUTION

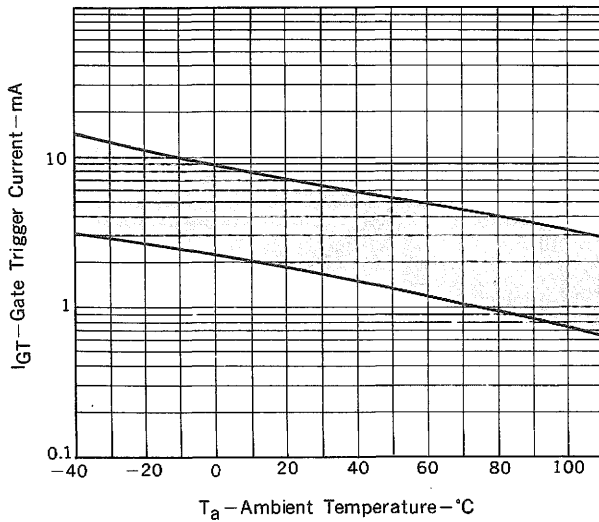


Fig. 6 $V_{GT} - T_a$ TYPICAL DISTRIBUTION

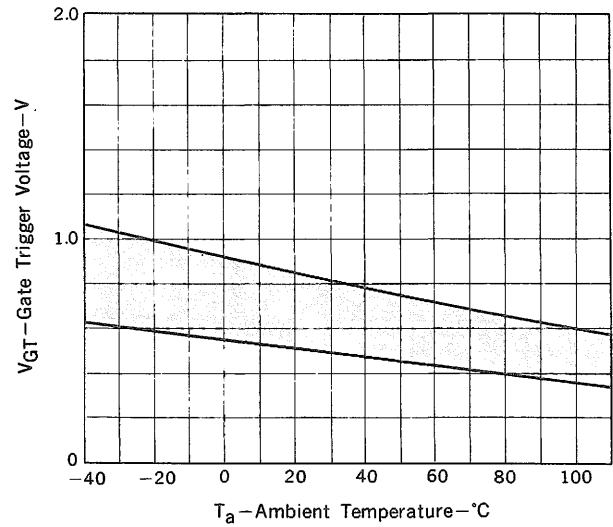


Fig. 7 $i_{GS} - \tau_G$ TYPICAL DISTRIBUTION

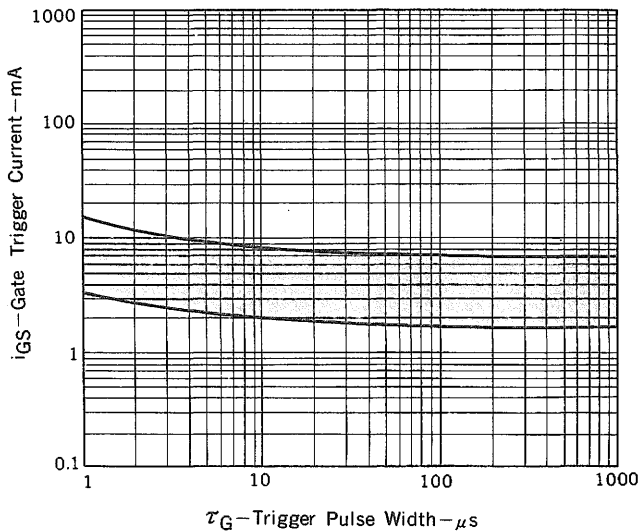


Fig. 8 $V_{GT} - \tau_G$ TYPICAL DISTRIBUTION

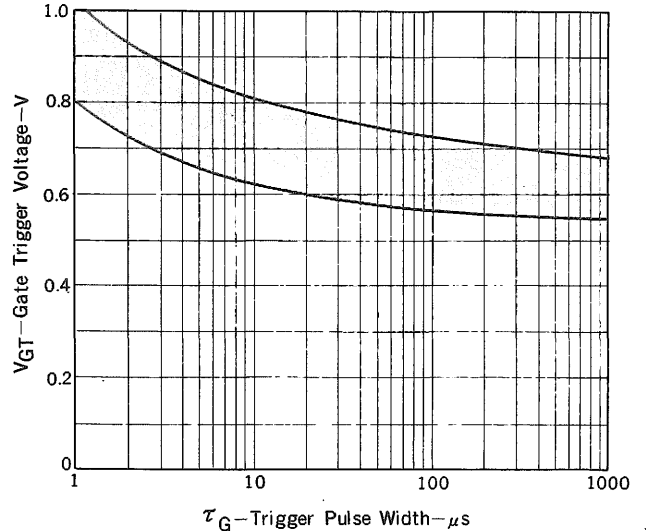


Fig. 9 $I_H - T_a$ TYPICAL DISTRIBUTION

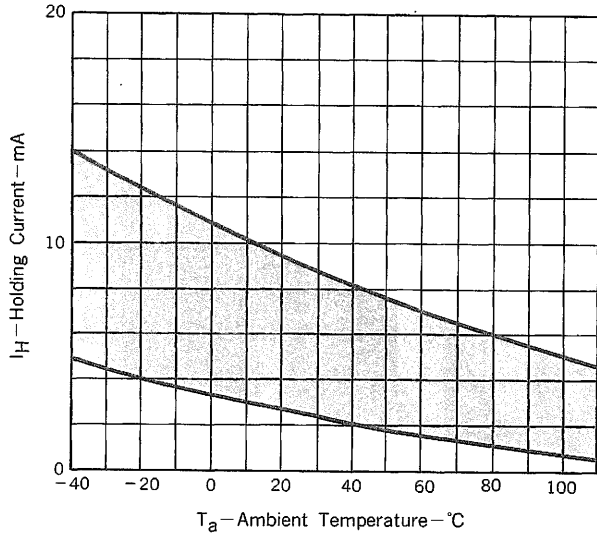


Fig. 10 $P_{T(AV)} - I_{T(AV)}$ CHARACTERISTICS

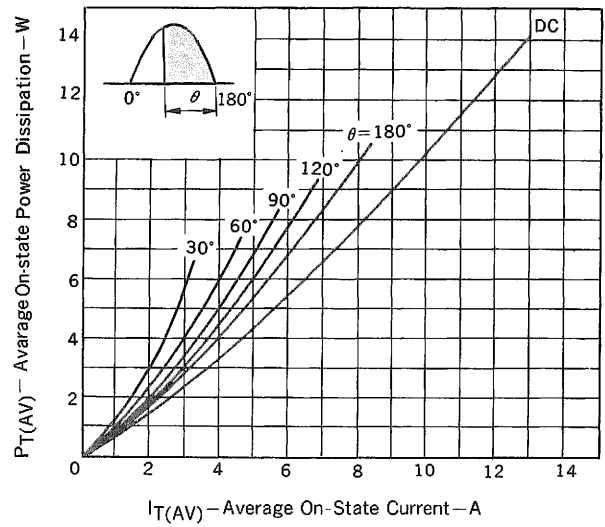


Fig. 11 $T_c - I_{T(AV)}$ RATING

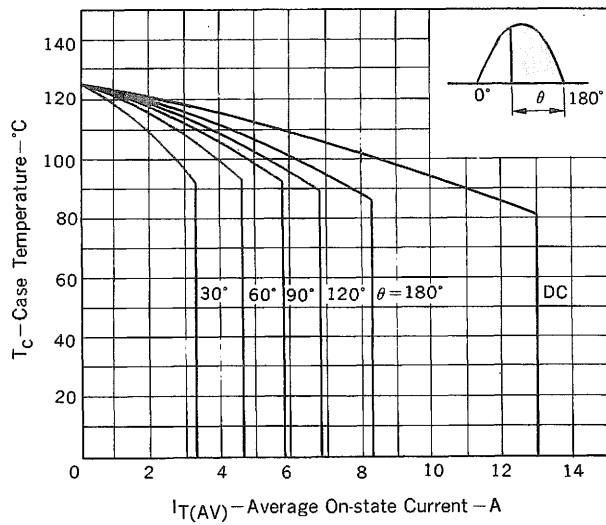


Fig. 12 $T_a - I_{T(AV)}$ RATING


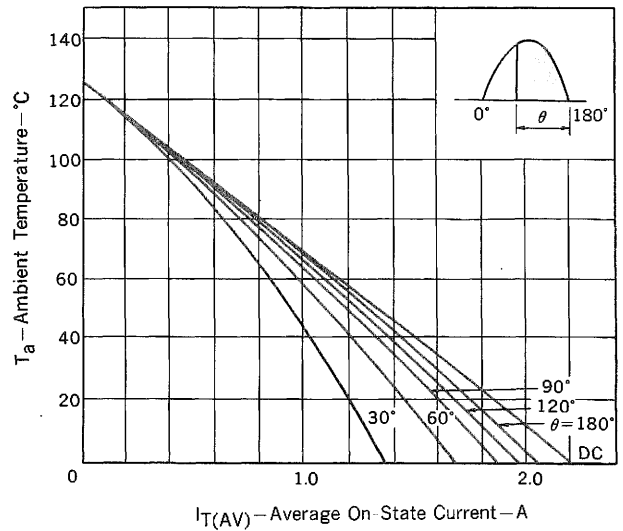


Fig. 13 Z_{th} CHARACTERISTICS



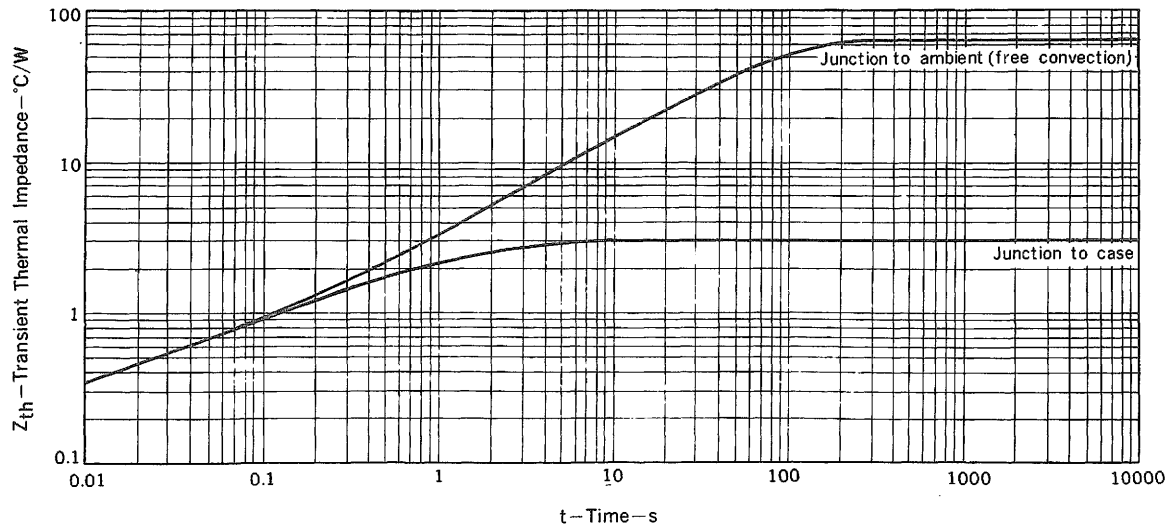

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.