

# Low-voltage variable capacitance diode

## FEATURES

- Ultra small plastic SMD package
- C4: 2.75 pF; ratio: 2.4
- Low series resistance.




## APPLICATIONS

- Voltage controlled oscillators (VCO).

## DESCRIPTION

The BB145B is a planar technology variable capacitance diode in a SOD523 (SC-79) package.

**BB 145B**



**LIMITING VALUES** In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_R$	continuous reverse voltage		–	6	V
$V_{RM}$	peak reverse voltage	in series with a 10 k $\Omega$ resistor	–	8	V
$I_F$	continuous forward current		–	20	mA
$T_{stg}$	storage temperature		–55	+150	$^{\circ}$ C
$T_j$	operating junction temperature		–55	+150	$^{\circ}$ C

**ELECTRICAL CHARACTERISTICS**  $T_j=25^{\circ}$ C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$I_R$	reverse current	$V_R=6$ V; see Fig.2	–	10	nA
		$V_R=6$ V; $T_j=85^{\circ}$ C; see Fig.2	–	200	nA
$r_s$	diode series resistance	$f=470$ MHz; $V_R=1$ V	–	0.6	$\Omega$
$C_d$	diode capacitance	$V_R=1$ V; $f=1$ MHz; see Figs 1 and 3	6.4	7.2	pF
		$V_R=4$ V; $f=1$ MHz; see Figs 1 and 3	2.55	2.95	pF
$\frac{C_{d(1V)}}{C_{d(4V)}}$	capacitance ratio	$f=1$ MHz	2.2	–	

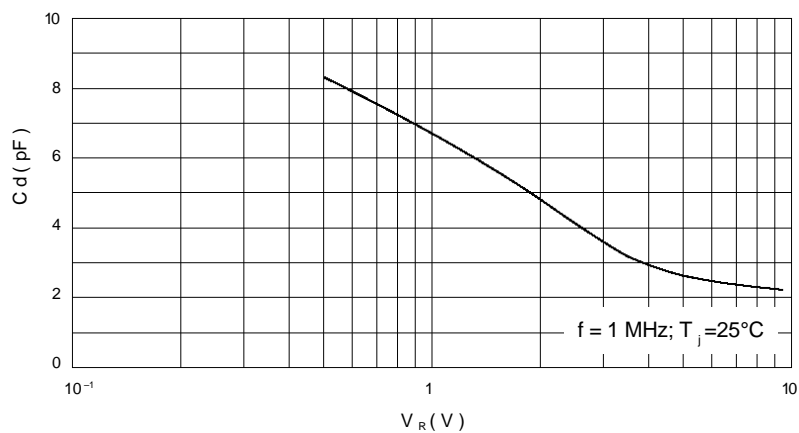
**BB 145B**


Fig.1 Diode capacitance as a function of reverse voltage; typical values.

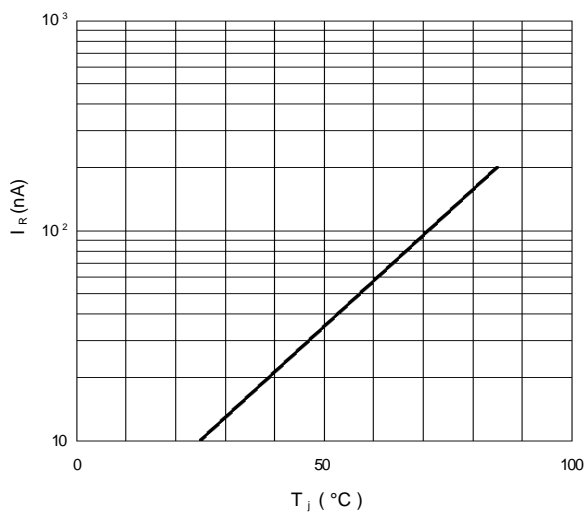


Fig.2 Reverse current as a function of junction temperature; maximum values.

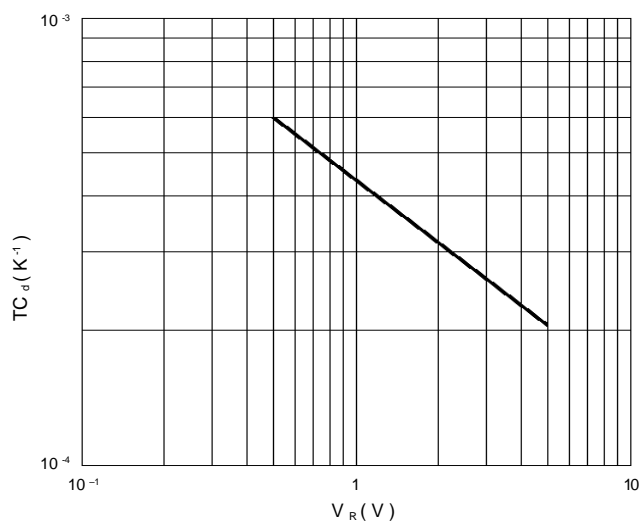


Fig.3 Temperature coefficient of diode capacitance as a function of reverse voltage; typical values.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.