


DATA SHEET

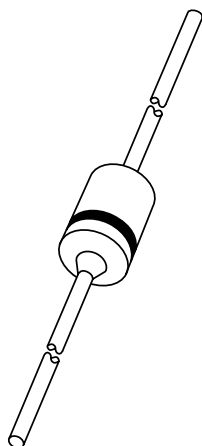

BYD43 series Fast soft-recovery rectifiers

Product specification
Supersedes data of February 1995

1996 Jun 05

Fast soft-recovery rectifiers

BYD43 series

FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Available in ammo-pack.

DESCRIPTION

Cavity free cylindrical glass package through Implotec™⁽¹⁾ technology. This package is hermetically sealed

and fatigue free as coefficients of expansion of all used parts are matched.

(1) Implotec is a trademark of Philips.




Fig.1 Simplified outline (SOD81) and symbol.

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RSM}	non-repetitive peak reverse voltage				
	BYD43U		—	1300	V
	BYD43V		—	1500	V
	BYD43-16		—	1700	V
	BYD43-18		—	1900	V
	BYD43-20		—	2100	V
V_{RRM}	repetitive peak reverse voltage				
	BYD43U		—	1200	V
	BYD43V		—	1400	V
	BYD43-16		—	1600	V
	BYD43-18		—	1800	V
	BYD43-20		—	2000	V
$I_{F(AV)}$	average forward current	$T_{tp} = 55\text{ °C}$; lead length = 10 mm; see Figs 2 and 3;	—	1.20	A
	BYD43U and V	averaged over any 20 ms period; see also Figs 10 and 11	—	0.68	A
$I_{F(AV)}$	average forward current	$T_{amb} = 65\text{ °C}$; PCB mounting (see Fig.20); see Figs 4 and 5;	—	0.65	A
	BYD43U and V	averaged over any 20 ms period; see also Figs 10 and 11	—	0.30	A
I_{FRM}	repetitive peak forward current	$T_{tp} = 55\text{ °C}$; see Figs 6 and 7	—	11	A
	BYD43U and V		—	6	A
I_{FRM}	repetitive peak forward current	$T_{amb} = 65\text{ °C}$; see Figs 8 and 9	—	6.0	A
	BYD43U and V		—	3.2	A
I_{FRM}	repetitive peak forward current				
	BYD43-16 to 20				

Fast soft-recovery rectifiers

BYD43 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{FSM}	non-repetitive peak forward current BYD43U and V BYD43-16 to 20	$t = 10$ ms half sinewave; $T_j = T_{j\max}$ prior to surge; $V_R = V_{RRMmax}$	– –	6 6	A A
T_{stg}	storage temperature		–65	+175	°C
T_j	junction temperature	see Figs 12 and 13	–65	+175	°C

ELECTRICAL CHARACTERISTICS

$T_j = 25$ °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	forward voltage BYD43U and V BYD43-16 to 20	$I_F = 1$ A; $T_j = T_{j\max}$; see Figs 14 and 15	– –	– –	1.20 2.05	V V
V_F	forward voltage BYD43U and V BYD43-16 to 20	$I_F = 1$ A; see Figs 14 and 15	– –	– –	1.5 2.4	V V
I_R	reverse current BYD43U and V BYD43-16 to 20	$V_R = V_{RRMmax}$; see Figs 16 and 17	– –	– –	1 5	μ A μ A
I_R	reverse current BYD43U and V BYD43-16 to 20	$V_R = V_{RRMmax}$ $T_j = 165$ °C; see Fig 16	–	–	100	μ A
		$T_j = 125$ °C; see Fig 17	–	–	50	μ A
t_{rr}	reverse recovery time BYD43U and V BYD43-16 to 20	when switched from $I_F = 0.5$ A to $I_R = 1$ A; measured at $I_R = 0.25$ A; see Fig 22	– –	– –	250 300	ns ns
C_d	diode capacitance BYD43U and V BYD43-16 to 20	$f = 1$ MHz; $V_R = 0$ V; see Figs 18 and 19	– –	20 15	– –	pF pF
$\left \frac{dI_R}{dt} \right $	maximum slope of reverse recovery current BYD43U and V BYD43-16 to 20	when switched from $I_F = 1$ A to $V_R \geq 30$ V and $dI_F/dt = -1$ A/ μ s; see Fig.21	– –	– –	5 5	A/ μ s A/ μ s

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-tp}$	thermal resistance from junction to tie-point	lead length = 10 mm	60	K/W
$R_{th\ j-a}$	thermal resistance from junction to ambient	note 1	120	K/W





Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer ≥ 40 μ m, see Fig.20. For more information please refer to the "General Part of associated Handbook".

Fast soft-recovery rectifiers


BYD43 series

GRAPHICAL DATA

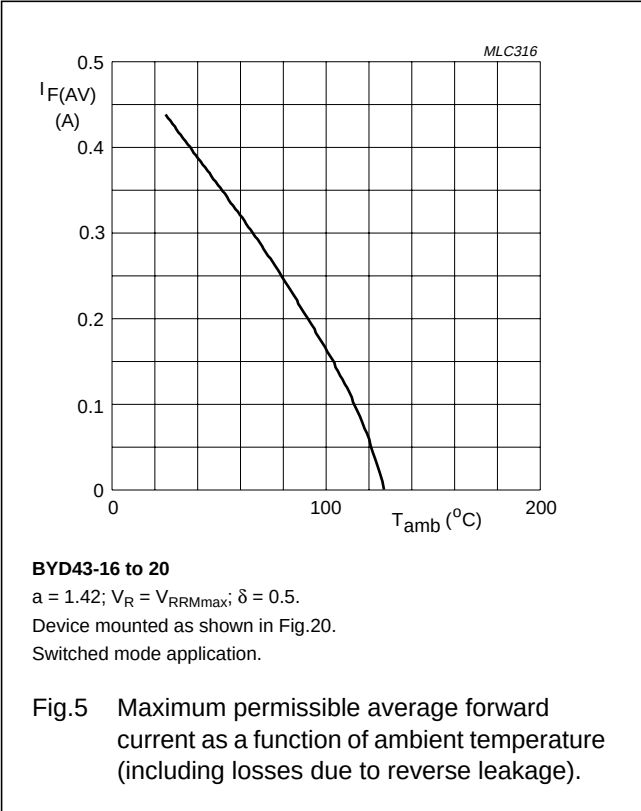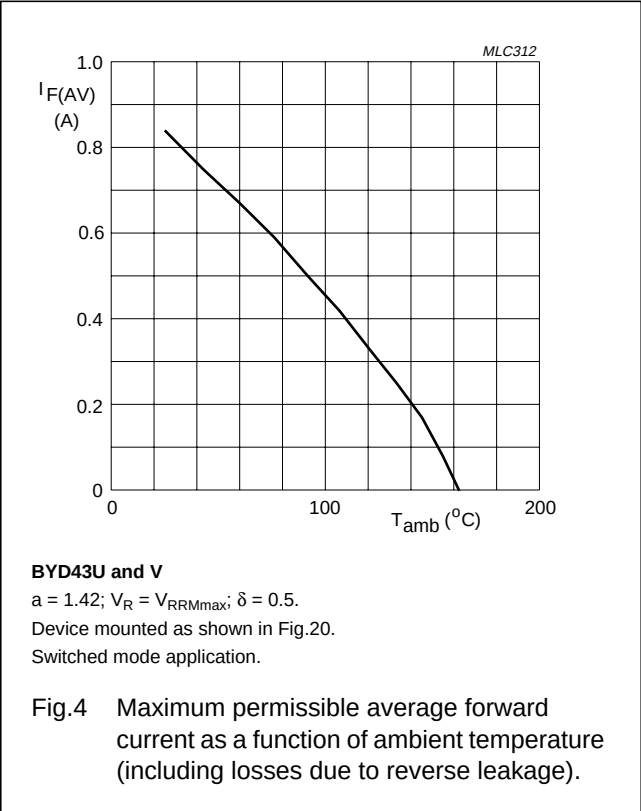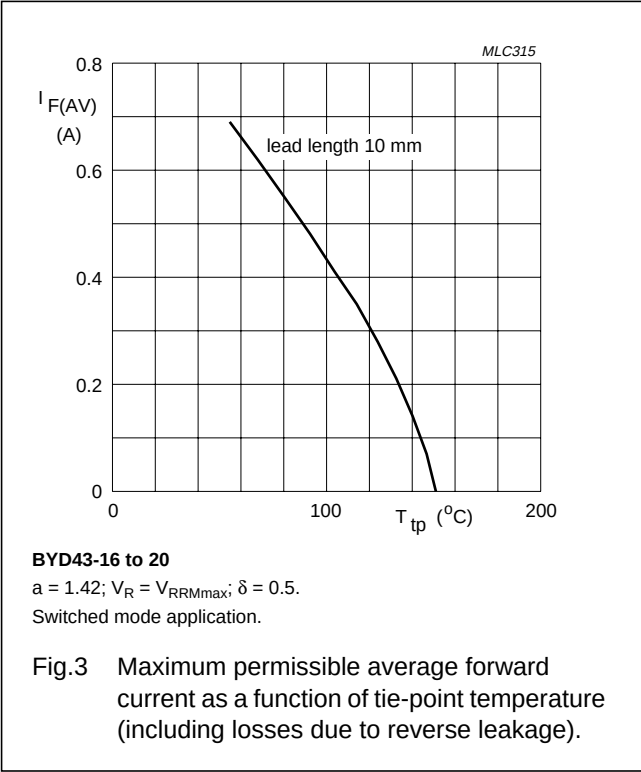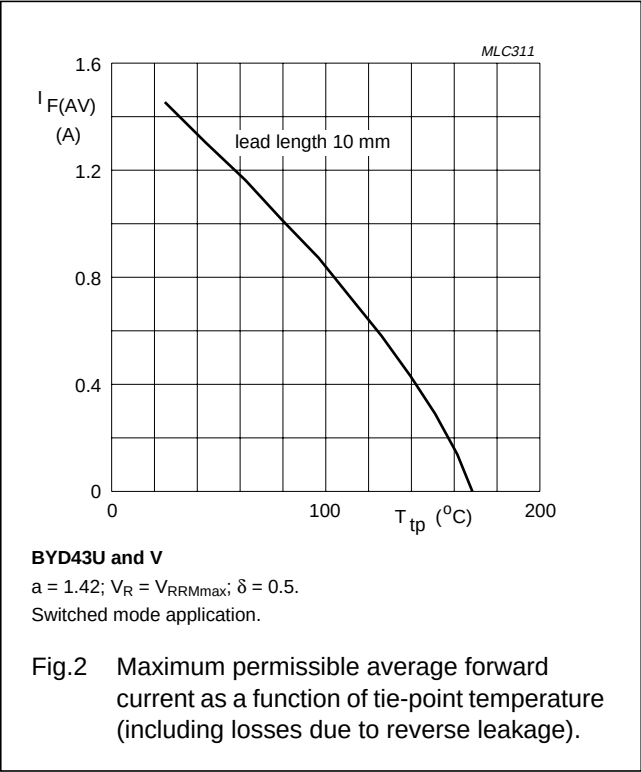

Fast soft-recovery rectifiers


BYD43 series

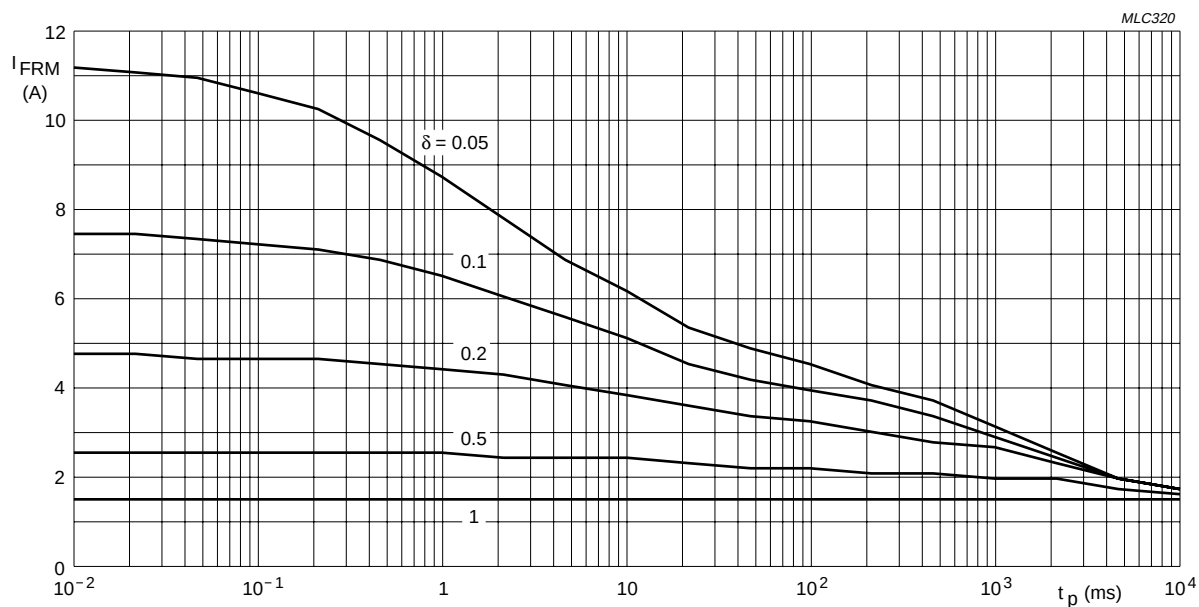**BYD43U and V**

$T_{ip} = 55^\circ\text{C}$; $R_{th j-ip} = 60\text{ K/W}$.

V_{RRMmax} during $1 - \delta$; curves include derating for T_{jmax} at $V_{RRM} = 1400\text{ V}$.

Fig.6 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

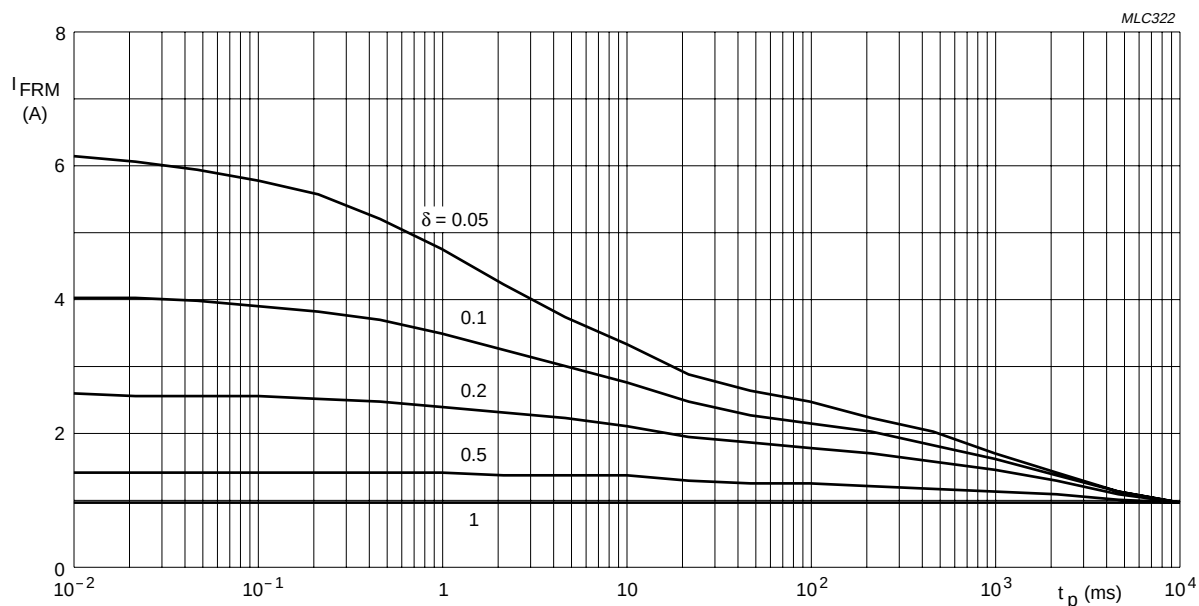**BYD43-16 to 20**


$T_{ip} = 55^\circ\text{C}$; $R_{th j-ip} = 60\text{ K/W}$.

V_{RRMmax} during $1 - \delta$; curves include derating for T_{jmax} at $V_{RRM} = 2000\text{ V}$.

Fig.7 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

Fast soft-recovery rectifiers


BYD43 series

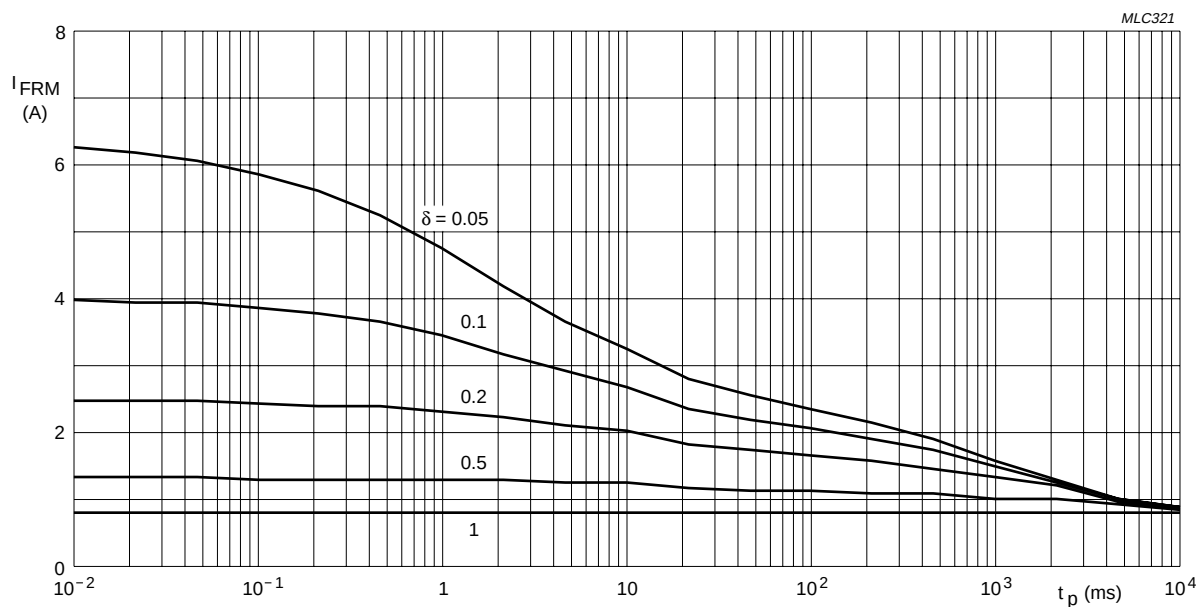**BYD43U and V**

$T_{amb} = 65^\circ\text{C}$; $R_{th\ j-a} = 120$ K/W.

V_{RRMmax} during $1 - \delta$; curves include derating for T_{jmax} at $V_{RRM} = 1400$ V.

Fig.8 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

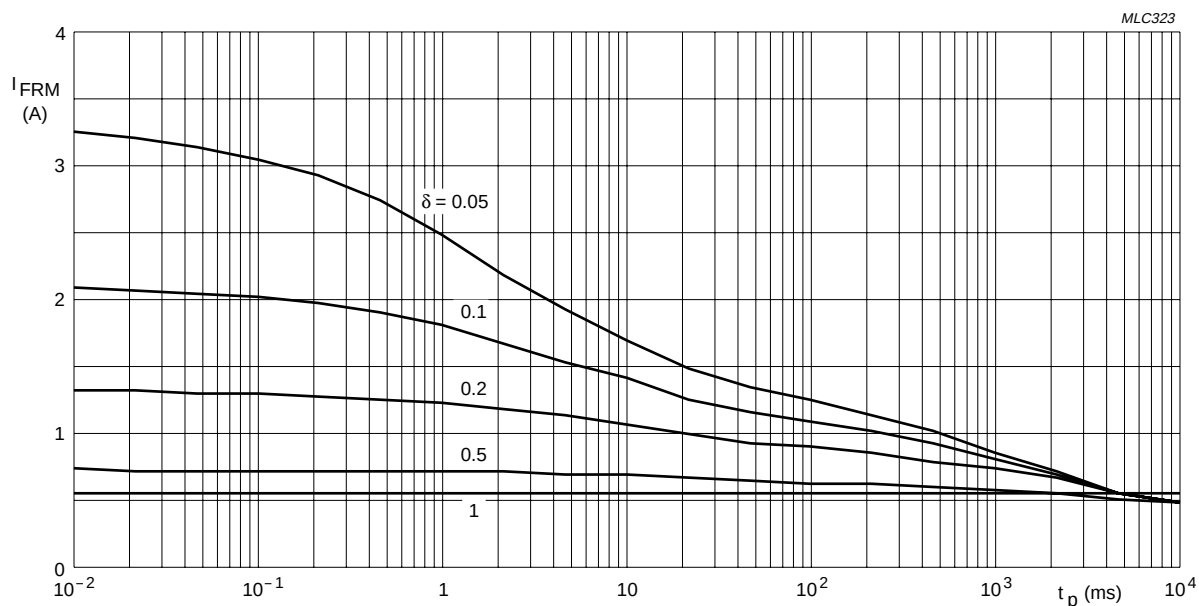**BYD43-16 to 20**


$T_{amb} = 65^\circ\text{C}$; $R_{th\ j-a} = 120$ K/W.

V_{RRMmax} during $1 - \delta$; curves include derating for T_{jmax} at $V_{RRM} = 2000$ V.

Fig.9 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.


Fast soft-recovery rectifiers

BYD43 series

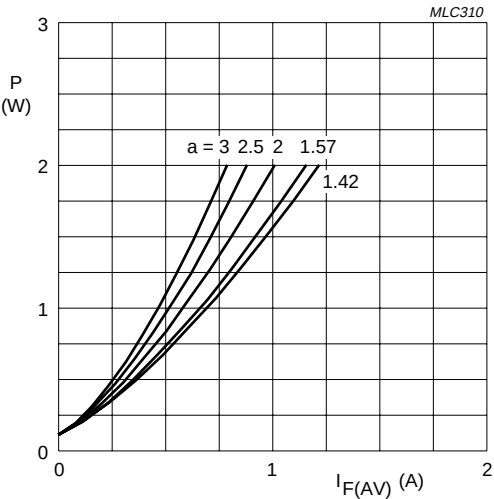


BYD43U and V
 $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Fig.10 Maximum steady state power dissipation (forward plus leakage current losses, excluding switching losses) as a function of average forward current.

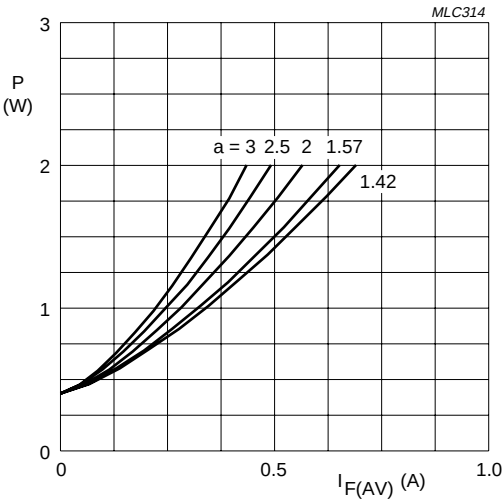


BYD43-16 to 20
 $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Fig.11 Maximum steady state power dissipation (forward plus leakage current losses, excluding switching losses) as a function of average forward current.

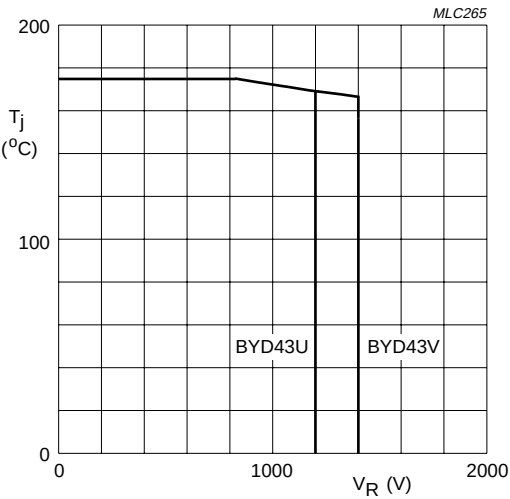

BYD43U and V
 V_{RRM} ; $\delta = 0.5$.

Fig.12 Maximum permissible junction temperature as a function of reverse voltage.

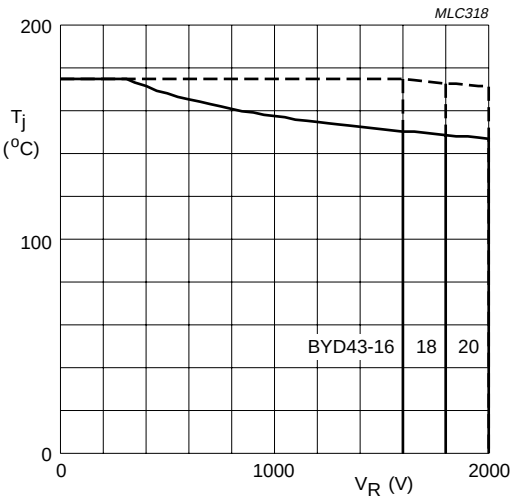


BYD43-16 to 20
Dotted line = V_{RRM} ; $\delta = 0.1$.
Solid line = V_{RRM} ; $\delta = 0.5$.

Fig.13 Maximum permissible junction temperature as a function of reverse voltage.


Fast soft-recovery rectifiers

BYD43 series

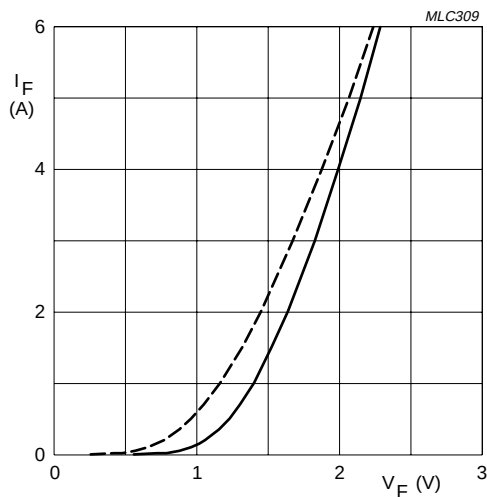


BYD43U and V
Dotted line: $T_j = 175\text{ }^{\circ}\text{C}$.
Solid line: $T_j = 25\text{ }^{\circ}\text{C}$.

Fig.14 Forward current as a function of forward voltage; maximum values.

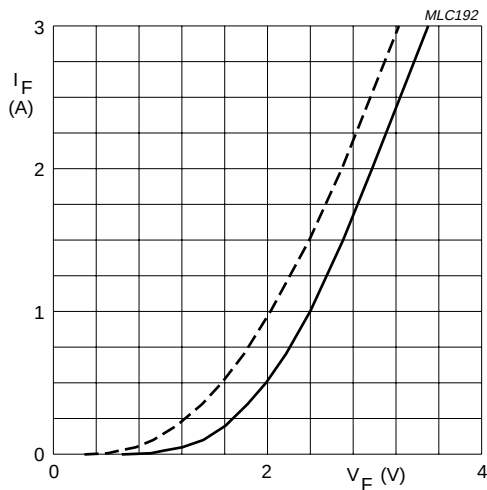


BYD43-16 to 20
Dotted line: $T_j = 175\text{ }^{\circ}\text{C}$.
Solid line: $T_j = 25\text{ }^{\circ}\text{C}$.

Fig.15 Forward current as a function of forward voltage; maximum values.

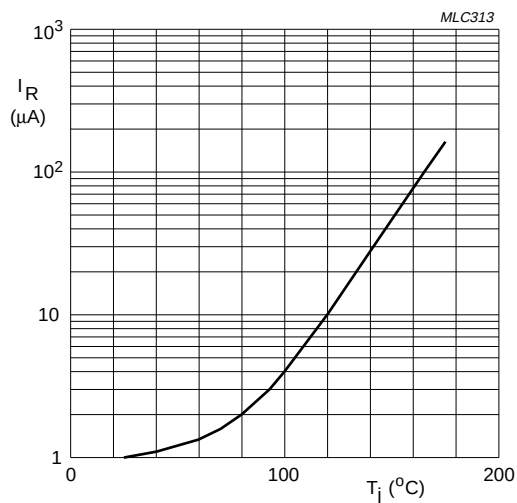

BYD43U and V
 $V_R = V_{RRMmax}$.

Fig.16 Reverse current as a function of junction temperature; maximum values.

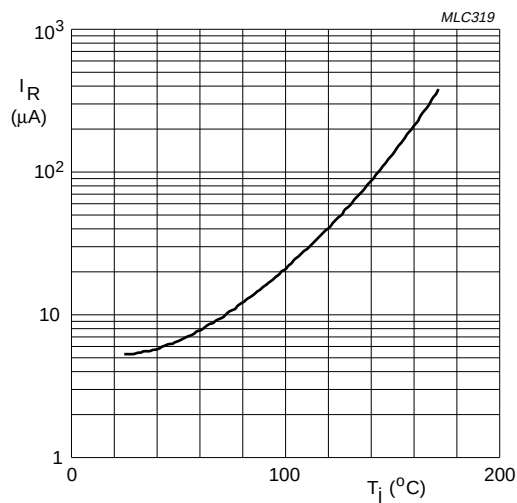


BYD43-16 to 20
 $V_R = V_{RRMmax}$.

Fig.17 Reverse current as a function of junction temperature; maximum values.


Fast soft-recovery rectifiers

BYD43 series

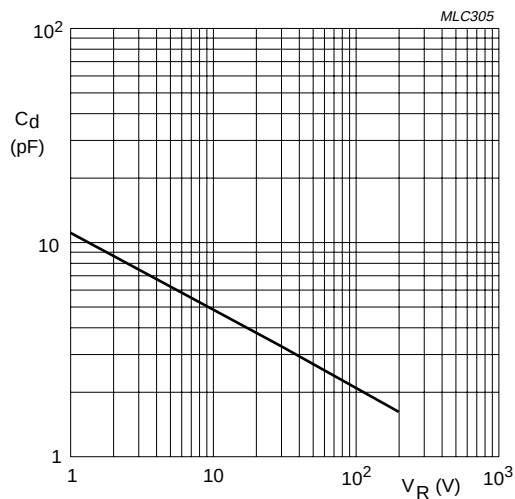


BYD43U and V
 $f = 1 \text{ MHz}; T_j = 25 \text{ }^\circ\text{C}.$

Fig.18 Diode capacitance as a function of reverse voltage; typical values.

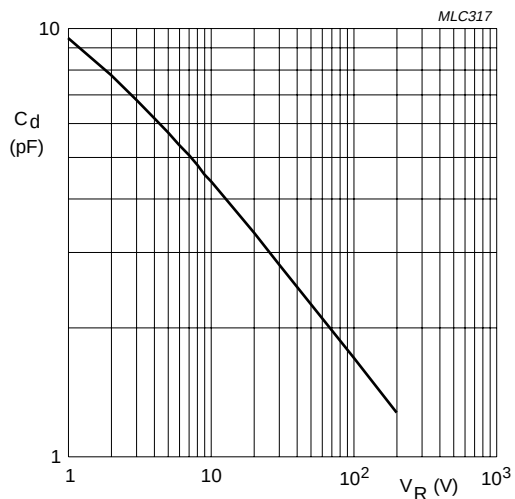

BYD43-16 to 20
 $f = 1 \text{ MHz}; T_j = 25 \text{ }^\circ\text{C}.$

Fig.19 Diode capacitance as a function of reverse voltage; typical values.

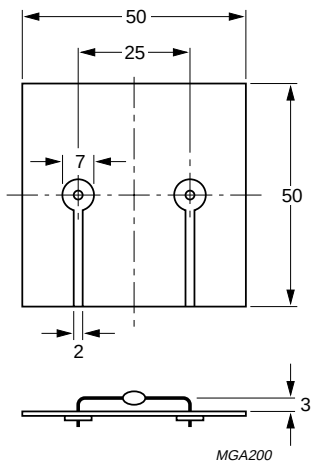

Dimensions in mm.

Fig.20 Device mounted on a printed-circuit board.



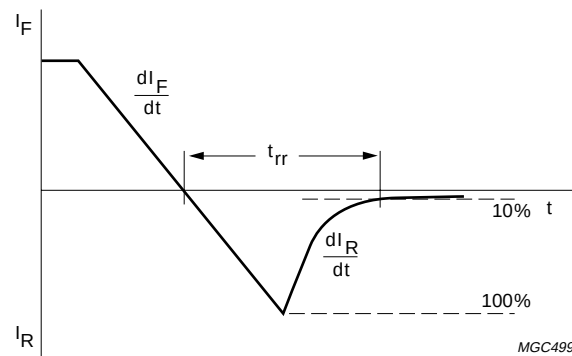


Fig.21 Reverse recovery definitions.

Fast soft-recovery rectifiers

BYD43 series

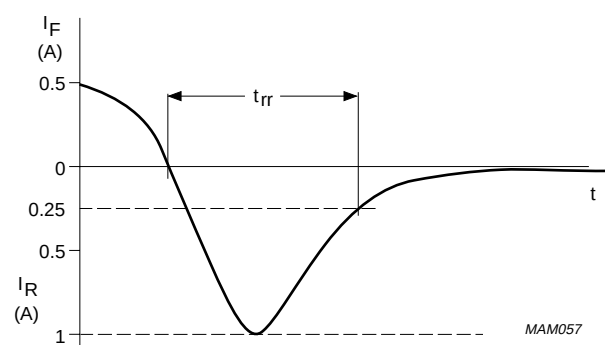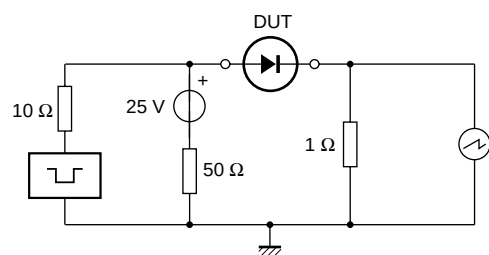


Input impedance oscilloscope: $1\text{ M}\Omega$, 22 pF ; $t_r \leq 7\text{ ns}$.
 Source impedance: $50\text{ }\Omega$; $t_r \leq 15\text{ ns}$.

Fig.22 Test circuit and reverse recovery time waveform and definition.

Fast soft-recovery rectifiers

BYD43 series

PACKAGE OUTLINE

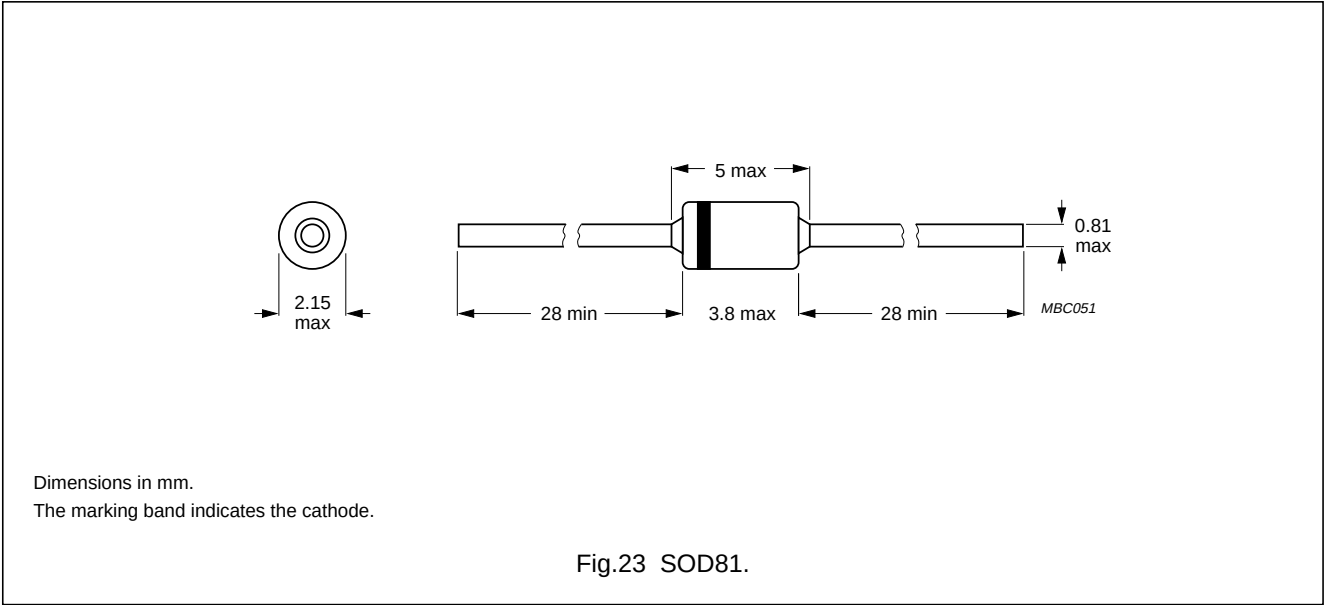

DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.