


# Damper-Modulator fast, high-voltage

**BYM358X**

## FEATURES

- Low forward volt drop
- Ultra fast switching
- Soft recovery characteristic
- High thermal cycling performance
- Isolated mounting tab

## SYMBOL

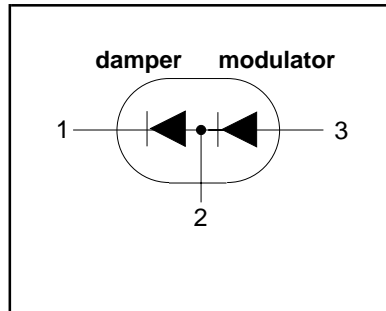

## QUICK REFERENCE DATA

DAMPER	MODULATOR
$V_R = 1500\text{ V}$	$V_R = 600\text{ V}$
$V_F \leq 1.5\text{ V}$	$V_F \leq 1.08\text{ V}$
$I_{F(\text{peak})} = 7\text{ A}$	$I_{F(\text{peak})} = 7\text{ A}$
$I_{\text{FSM}} \leq 66\text{ A}$	$I_{\text{FSM}} \leq 70\text{ A}$
$t_{\text{tr}} \leq 170\text{ ns}$	$t_{\text{tr}} \leq 60\text{ ns}$

## GENERAL DESCRIPTION

Combined damper and modulator diodes in an isolated plastic envelope for horizontal deflection in PC monitors.


The BYM358X contains diodes with performance characteristics designed specifically for applications from 32kHz to 120kHz

The BYM358X series is supplied in the conventional leaded SOT186A package.

## PINNING

PIN	DESCRIPTION
1	damper cathode
2	common anode/cathode
3	modulator anode.

## SOT186A

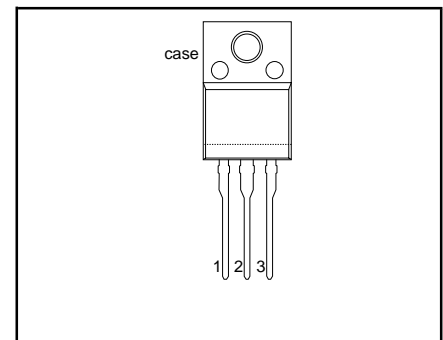

## LIMITING VALUES

$T_j = 25\text{ }^\circ\text{C}$  unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	DAMPER		MODULATOR		UNIT
			MIN	MAX	MIN	MAX	
$V_{\text{RSM}}$	Peak non-repetitive reverse voltage.		-	1500	-	600	V
$V_{\text{RRM}}$	Peak repetitive reverse voltage		-	1500	-	600	V
$V_{\text{RWM}}$	Crest working reverse voltage		-	1300	-	600	V
$I_{\text{F(peak)}}$	Peak forward current	31-70 kHz monitor.	-	7	-	7	A
$I_{\text{F(RMS)}}$	RMS forward current	sinusoidal; $a=1.57$	-	15.7	-	14.1	A
$I_{\text{FSM}}$	Peak non-repetitive forward current	$t = 10\text{ ms}$	-	60	-	70	A
		$t = 8.3\text{ ms}$ sinusoidal; with reapplied $V_{\text{RWM(MAX)}}$	-	66	-	77	A
$T_{\text{stg}}$	Storage temperature		-40	150	-40	150	$^\circ\text{C}$
$T_j$	Operating junction temperature		-	150	-	150	$^\circ\text{C}$

## Damper-Modulator fast, high-voltage

BYM358X

### ISOLATION LIMITING VALUE & CHARACTERISTIC

$T_{hs} = 25\text{ °C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{isol}$	R.M.S. isolation voltage from all three terminals to external heatsink	$f = 50\text{-}60\text{ Hz}$ ; sinusoidal waveform; R.H. $\leq 65\%$ ; clean and dustfree	-	-	2500	V
$C_{isol}$	Capacitance from T2 to external heatsink	$f = 1\text{ MHz}$	-	10	-	pF

### THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	DAMPER		MODULATOR		UNIT
			TYP.	MAX.	TYP.	MAX.	
$R_{th\ j\text{-}hs}$	Thermal resistance junction to heatsink	with heatsink compound	-	4.8	-	5.5	K/W
$R_{th\ j\text{-}a}$	Thermal resistance junction to ambient	in free air.	55	-	55	-	K/W

### STATIC CHARACTERISTICS OF DAMPER

$T_j = 25\text{ °C}$  unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	TYP	MAX.	UNIT
$V_F$	Forward voltage	$I_F = 6.5\text{ A}$	1.3	1.6	V
$I_R$	Reverse current	$I_F = 6.5\text{ A}; T_j = 125\text{ °C}$	1.2	1.5	V
		$V_R = V_{RWM}$	10	100	$\mu\text{A}$
		$V_R = V_{RWM}$ $T_j = 100\text{ °C}$	300	500	$\mu\text{A}$

### STATIC CHARACTERISTICS OF MODULATOR

$T_j = 25\text{ °C}$  unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	TYP	MAX.	UNIT
$V_F$	Forward voltage	$I_F = 8\text{ A}$	1.2	1.3	V
		$I_F = 8\text{ A}; T_j = 150\text{ °C}$	0.95	1.08	V
$I_R$	Reverse current.	$I_F = 20\text{ A}$	1.3	1.45	V
		$V_R = V_{RWM}$	10	50	$\mu\text{A}$
		$V_R = V_{RWM}$ $T_j = 100\text{ °C}$	100	350	$\mu\text{A}$

## Damper-Modulator fast, high-voltage

BYM358X

### ELECTRICAL CHARACTERISTICS OF DAMPER

$T_j = 25\text{ }^\circ\text{C}$  unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$t_{rr}$	Reverse recovery time	$I_F = 1\text{ A}$ ; $V_R \geq 30\text{ V}$ ; $-di_F/dt = 50\text{ A}/\mu\text{s}$	130	170	ns
$Q_s$	Reverse recovery charge	$2\text{ A}$ , $30\text{ V}$ , $20\text{ A}/\mu\text{s}$	0.65	0.9	$\mu\text{C}$
$V_{fr}$	Peak forward recovery voltage	$I_F = 6.5\text{ A}$ ; $di_F/dt = 50\text{ A}/\mu\text{s}$	29	-	V







### ELECTRICAL CHARACTERISTICS OF MODULATOR

$T_j = 25\text{ }^\circ\text{C}$  unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$t_{rr}$	Reverse recovery time	$I_F = 1\text{ A}$ ; $V_R \geq 30\text{ V}$ ; $-di_F/dt = 100\text{ A}/\mu\text{s}$	35	60	ns
$I_{rrm}$	Peak reverse recovery current	$I_F = 10\text{ A}$ to $V_R \geq 30\text{ V}$ ; $di_F/dt = 50\text{ A}/\mu\text{s}$ ; $T_j = 100\text{ }^\circ\text{C}$	3.0	5.5	A
$Q_s$	Reverse recovery charge	$2\text{ A}$ , $30\text{ V}$ , $20\text{ A}/\mu\text{s}$	40	70	nC
$V_{fr}$	Peak forward recovery voltage	$I_F = 10\text{ A}$ ; $di_F/dt = 10\text{ A}/\mu\text{s}$	5.0	-	V






Damper-Modulator  
fast, high-voltage

BYM358X

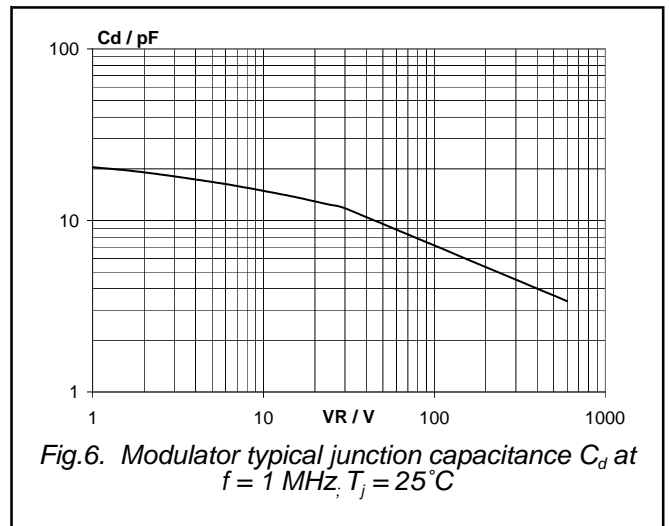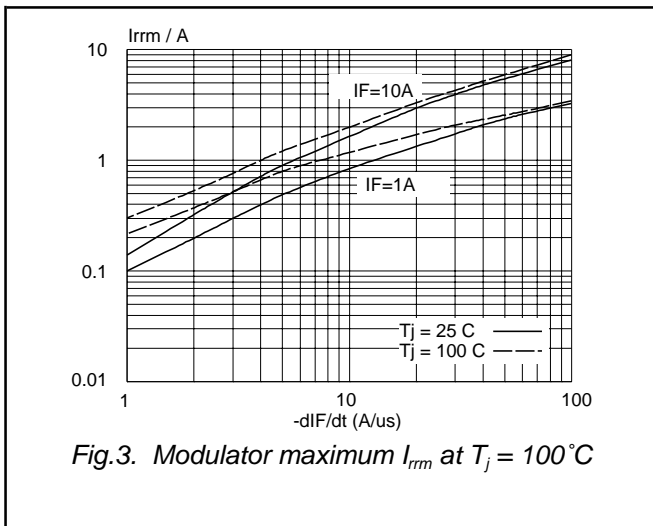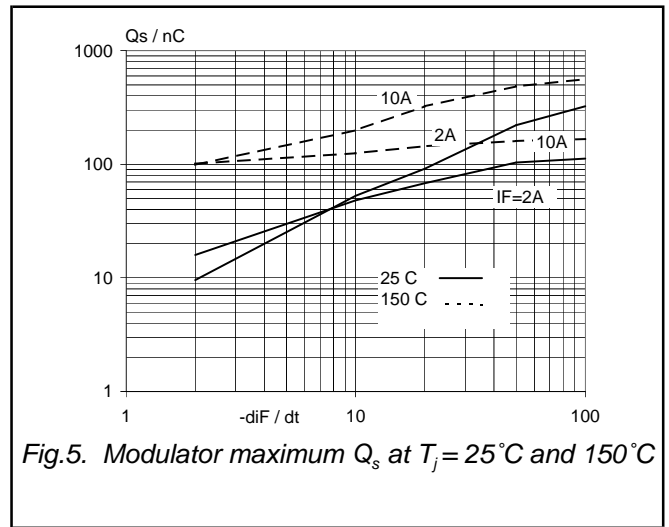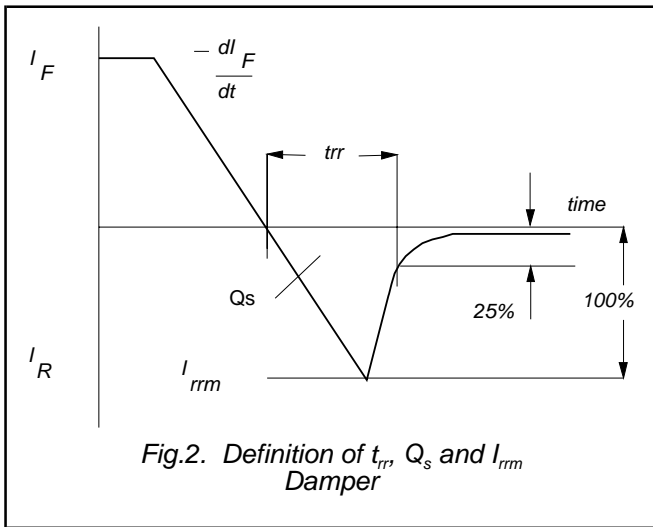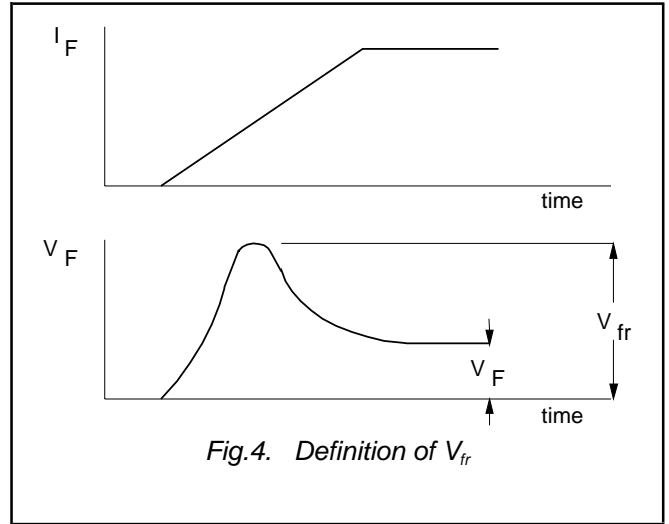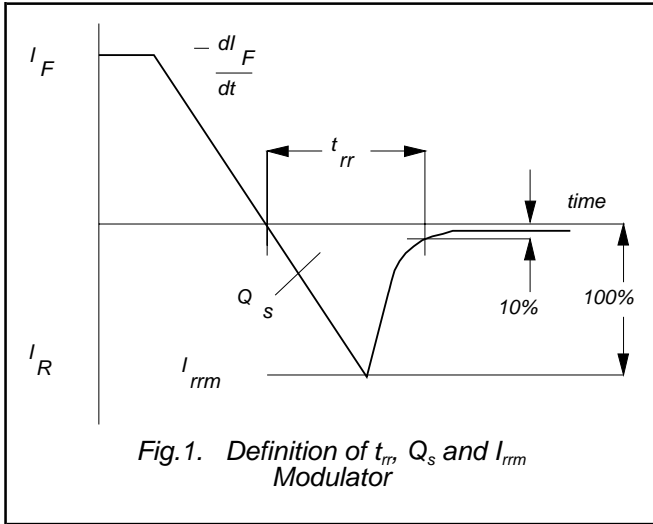

Damper-Modulator  
fast, high-voltage

BYM358X

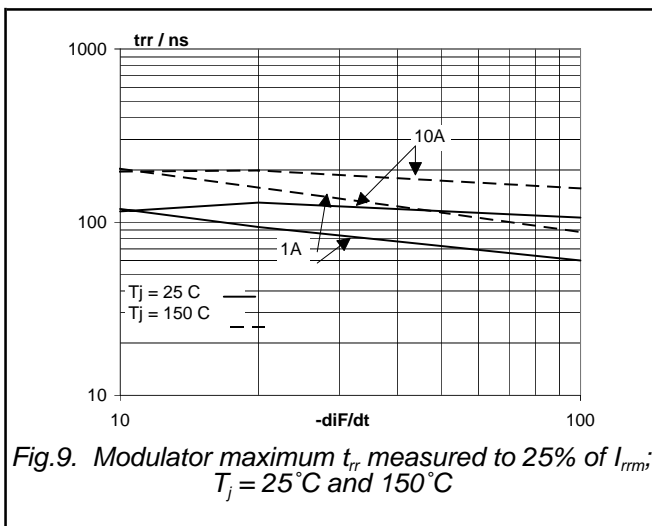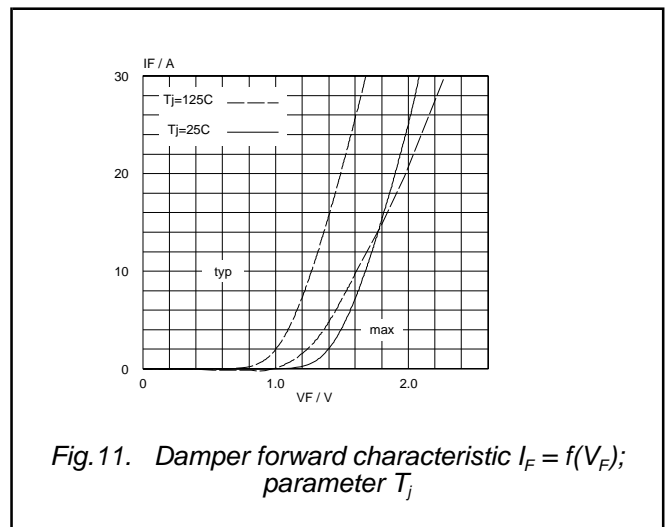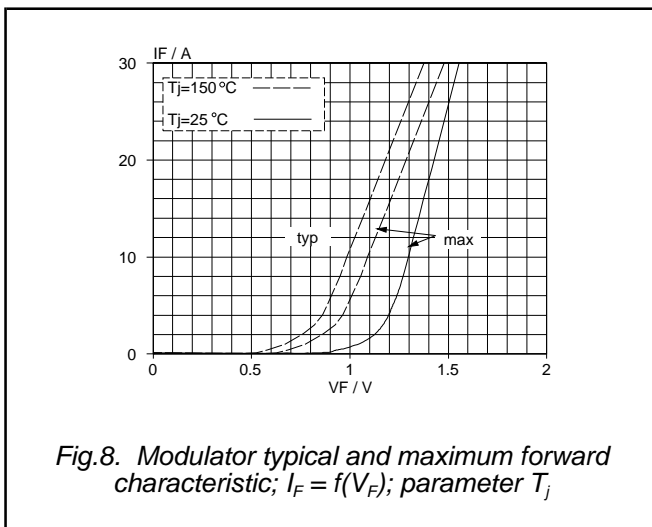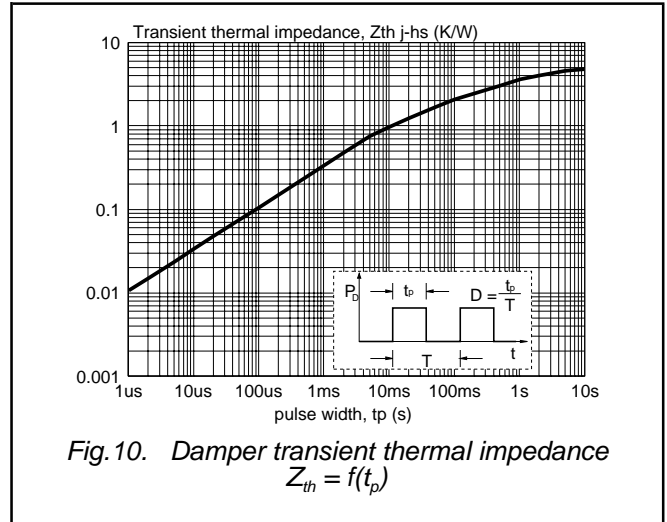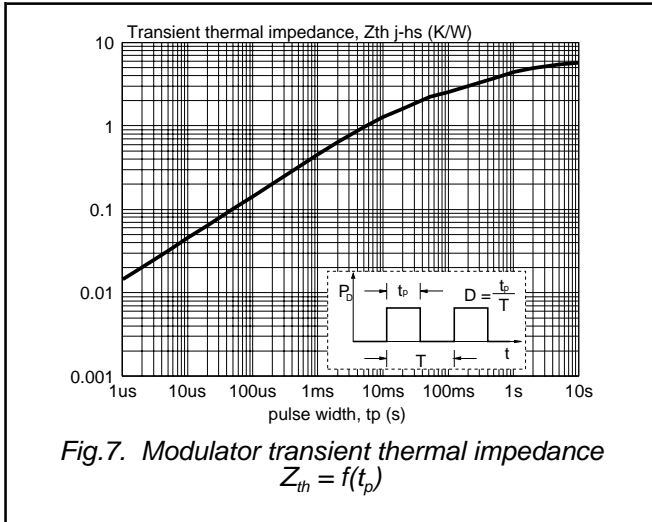



## Damper-Modulator fast, high-voltage

BYM358X

### DEFINITIONS

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 2000	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.