


# High transition frequency (dual transistors)

## EMX4 / UMW6N / UMW10N / UMX4N / FMW6 / FMW10 / IMX4

### ●Features

- 1) Two 2SC3837K chips in a EMT or UMT or SMT package.
- 2) High transition frequency. ( $f_T=1.5\text{GHz}$ )
- 3) Low output capacitance. ( $C_{ob}=0.95\text{pF}$ )

### ●Equivalent circuit

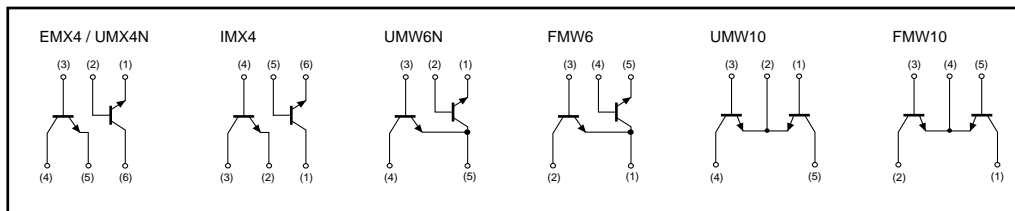

### ●Absolute maximum ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Limits	Unit
Collector-base voltage	$V_{CB0}$	30	V
Collector-emitter voltage	$V_{CE0}$	18	V
Emitter-base voltage	$V_{EB0}$	3	V
Collector current	$I_c$	50	mA
Collector power dissipation	EMX4 / UMW6N / UMW10N / UMX4N	150(TOTAL)	mW <sup>※1</sup>
	FMW6 / FMW10 / IMX4	300(TOTAL)	
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55~+150	$^\circ\text{C}$

<sup>※1</sup> 120mW per element must not be exceeded.  
<sup>※2</sup> 200mW per element must not be exceeded.

### ●Electrical characteristics ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	$BV_{CB0}$	30	-	-	V	$I_c=10\mu\text{A}$
Collector-emitter breakdown voltage	$BV_{CE0}$	18	-	-	V	$I_c=1\text{mA}$
Emitter-base breakdown voltage	$BV_{EB0}$	3	-	-	V	$I_E=10\mu\text{A}$
Collector cutoff current	$I_{cBO}$	-	-	0.5	$\mu\text{A}$	$V_{CB}=10\text{V}$
Emitter cutoff current	$I_{EBO}$	-	-	0.5	$\mu\text{A}$	$V_{EB}=2\text{V}$
DC current transfer ratio	$h_{FE}$	27	-	270	-	$V_{CE}/I_c=10\text{V}/10\text{mA}$
Collector-emitter saturation voltage	$V_{CE(sat)}$	-	-	0.5	V	$I_c/I_B=20\text{mA}/4\text{mA}$
$h_{FE}$ pairing	$h_{FE1} / h_{FE2}$	0.5	1	2	-	$V_{CE}/I_c=10\text{V}/10\text{mA}$
Transition frequency	$f_T$	600	1500	-	MHz	$V_{CE}/I_c=10\text{V}/10\text{mA}$ , $f=200\text{MHz}$ *
Output capacitance	$C_{ob}$	-	0.95	1.6	pF	$V_{CB}/f=10\text{V}/1\text{MHz}$ , $I_E=0\text{A}$

\*Transition frequency of the device.


# EMX4 / UMW6N / UMW10N / UMX4N / FMW6 / FMW10 / IMX4

## Transistors

### ●Package, marking, and packaging specifications

Type	EMX4	UMW6N	UMW10N	UMX4N	FMW6	FMW10	IMX4
Package	EMT6	UMT5	UMT6	UMT6	SMT5	SMT6	SMT6
Marking	X4	W6	W10	X4	W6	W10	X4
Code	T2R	TR	TR	TR	T148	T148	T108
Basic ordering unit (pieces)	8000	3000	3000	3000	3000	3000	3000

### ●External dimensions (Units : mm)

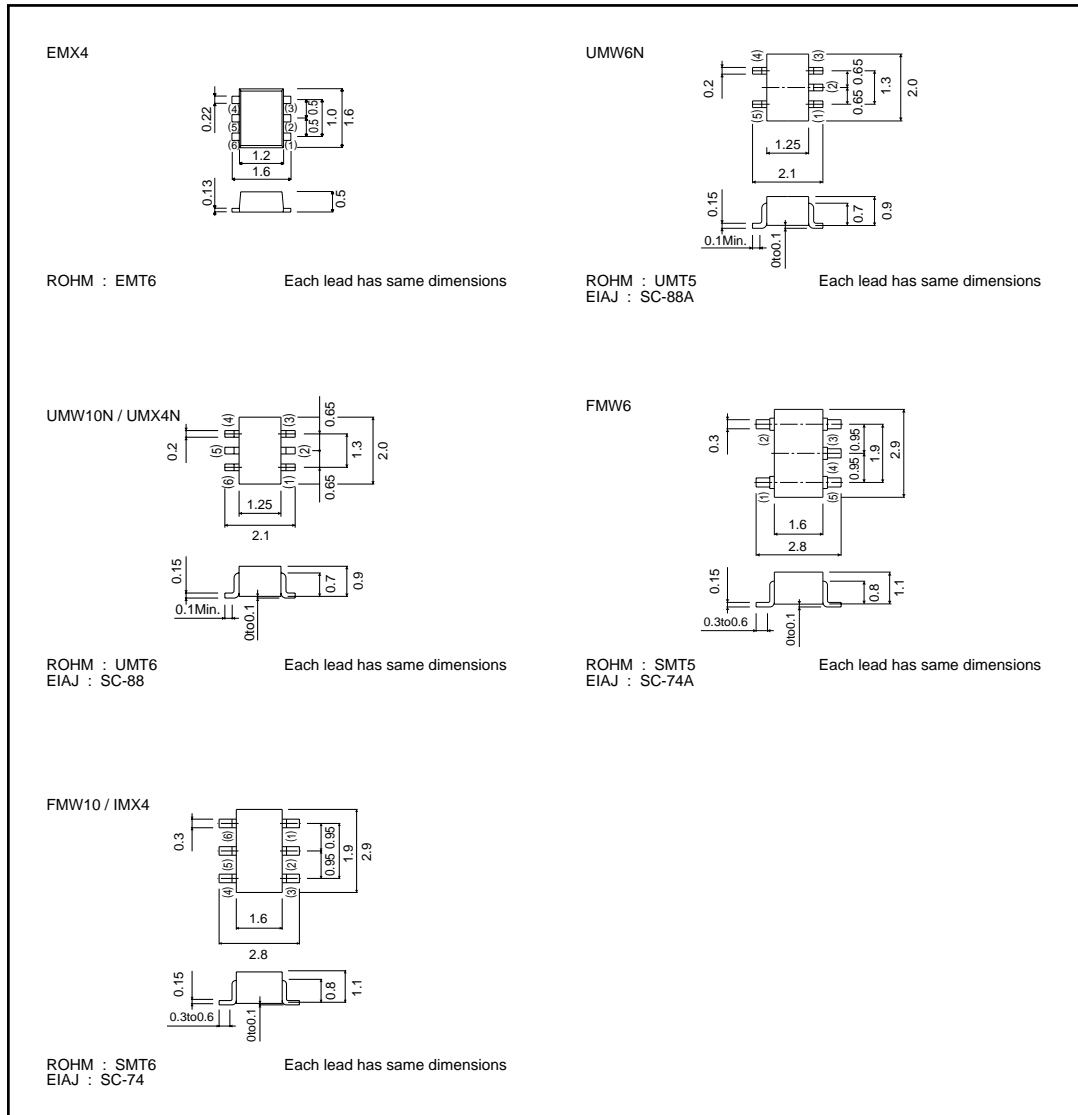

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.