

Zener diode

FTZ5.6E

●Applications

Constant voltage control
Noise suppression on signal line


●Features

- 1) Small surface mounting type.(SMD5)
- 2) Multiple diodes with common anode configuration.
- 3) High reliability.

●Construction

Silicon epitaxial planar

●External dimensions (Units : mm)

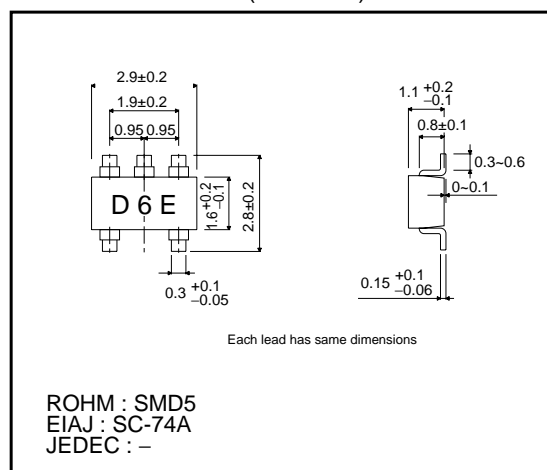


●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power dissipation*	P	200	mW
Junction temperature	T _J	125	°C
Storage temperature	T _{stg}	-55~+125	°C

* Total of 4 elements

●Equivalent circuit



●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Zener voltage	V _Z	5.31	-	5.92	V	I _Z =5mA
Reverse current	I _R	-	-	1	μA	V _R =2.5V
Operating resistance	Z _Z	-	-	60	Ω	I _Z =5mA
Rising operating resistance	Z _{ZK}	-	-	200	Ω	I _Z =0.5mA

●Others

Parameter	IEC61000-4-2
Device configuration	<ul style="list-style-type: none"> • Charge / discharge capacitance : 150pF • Discharge resistance : 330Ω
Judgment contents	<ul style="list-style-type: none"> • 10 repetitions • No malfunction • Contact : ±8kV • Suspended : ±15kV

Diodes

●Electrical characteristic curve (Ta=25°C)

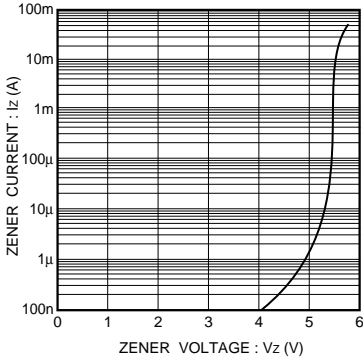


Fig.1 Zener characteristics

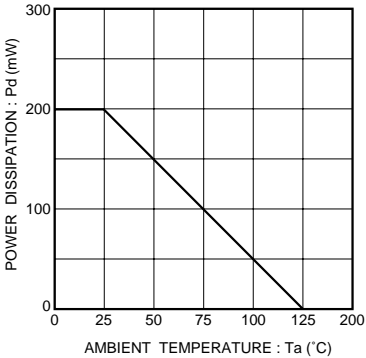


Fig.2 Derating curve



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.