

Zener diode

FTZ6.8E

●Applications

Noise suppression on single line

Constant voltage control


●Features

- 1) Small surface mounting type. (SMD5)
- 2) Multiple diodes with common anode configuration.
- 3) High reliability.


●Construction

Silicon epitaxial planar

●Circuit



●External dimensions (Units : mm)

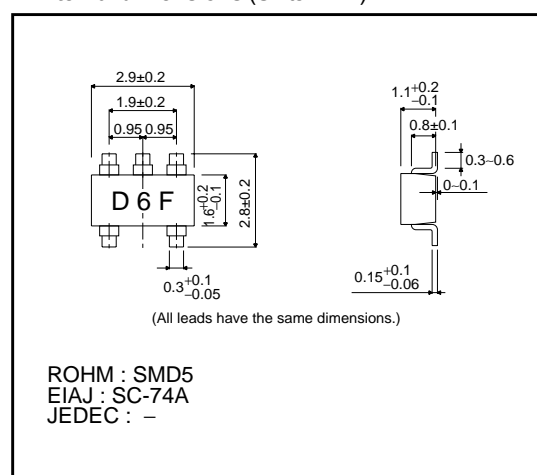

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power dissipation*	P	200	mW
Junction temperature	T _j	125	°C
Storage temperature	T _{stg}	-55~+125	°C

* Total of 4 elements

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Zener voltage	V _z	6.47	-	7.14	V	I _z =5mA
Reverse current	I _R	-	-	0.5	μA	V _R =3.5V
Operating resistance	Z _z	-	-	40	Ω	I _z =5mA
Rising operating resistance	Z _{zk}	-	-	60	Ω	I _z =0.5mA

Diodes

●Others

Item	Standard 1	IEC1000-4-2
Device configuration	Charge/discharge capacitance : 200 pF ± 10% Discharge resistance : 400 Ω ± 10%	Charge/discharge capacitance : 150 pF Discharge resistance : 330 Ω
Judgment contents	5 repetitions No spark or smoke emitted : ± 25 kV No element destruction : ± 20 kV No malfunction : ± 8 kV	10 repetitions No malfunction Contact : ± 8 kV Suspended : ± 15 kV

●Electrical characteristic curves (Ta=25°C)

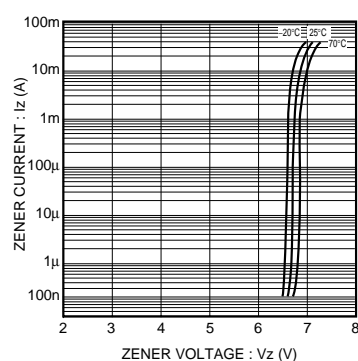


Fig.1 Zener characteristics

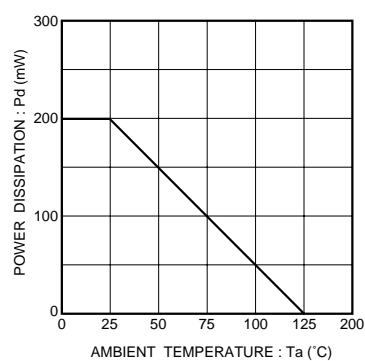


Fig.2 Derating curve



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.