


SIEMENS AKTIENGESELLSCHAFT

Main ratings


Drain-source voltage $V_{DS} = 500$ V
 Continuous drain current $I_D = 8,5$ A
 Drain-source on-resistance $R_{DS(on)} = 0,6 \Omega$

N-Channel



Description FREDET with fast-recovery reverse diode, N-channel, enhancement mode
Case Plastic package TO 238 AA with insulated metal base plate in accordance with JEDEC, compatible with TO 3; AMP plug-in connections.
 Approx. weight 21 g

Type	Ordering code
BUZ 213	C67078-A1700-A2

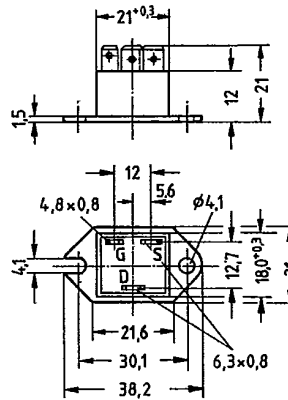

Maximum ratings

Dimensions in mm

Description	Symbols	Ratings	Units	Conditions
Drain-source voltage	V_{DS}	500	V	
Drain-gate voltage	V_{DGR}	500	V	$R_{GS} = 20 \text{ k}\Omega$
Continuous drain current	I_D	8,5	A	$T_C = 25 \text{ }^\circ\text{C}$
Pulsed drain current	$I_{D,puls}$	34	A	$T_C = 25 \text{ }^\circ\text{C}$
Gate-source voltage	V_{GS}	± 20	V	
Max. power dissipation	P_D	83,3	W	$T_C = 25 \text{ }^\circ\text{C}$
Operating and storage temperature range	T_j	-40 ... +150	$^\circ\text{C}$	
Isolation test voltage	V_{is}	3500	Vdc ¹⁾	$t = 1 \text{ min}$
DIN humidity category	F			DIN 40040
IEC climatic category	40/150/56			DIN IEC 68-1

Thermal resistance

Chip - case | R_{thJC} | $\leq 1,5$ | K/W |


¹⁾ Isolation test voltage between drain and base plate referred to standard climate 23/50 in accordance with DIN 50014.

Electrical characteristics(at $T_j = 25^\circ\text{C}$ unless otherwise specified)


Description	Symbol	Characteristics			Unit	Conditions
		min.	typ.	max.		
Static ratings						
Drain-source breakdown voltage	$V_{(BR)DSS}$	500	—	—	V	$V_{GS} = 0V$ $I_D = 0,25mA$
Gate threshold voltage	$V_{GS(th)}$	2,1	3,0	4,0		$V_{DS} = V_{GS}$ $I_D = 1mA$
Zero gate voltage drain current	I_{DSS}	—	20	250	μA	$T_j = 25^\circ\text{C}$ $T_j = 125^\circ\text{C}$ $V_{DS} = 500V$ $V_{GS} = 0V$
Gate-source leakage current	I_{GSS}	—	10	100	nA	$V_{GS} = 20V$ $V_{DS} = 0V$
Drain-source on-resistance	$R_{DS(on)}$	—	0,55	0,6	Ω	$V_{GS} = 10V$ $I_D = 5,5A$
Dynamic ratings						
Forward transconductance	g_{fs}	2,7	5,3	—	S	$V_{DS} = 25V$ $I_D = 5,5A$
Input capacitance	C_{iss}	—	3,8	4,9	nF	$V_{GS} = 0V$
Output capacitance	C_{oss}	—	250	400	pF	$V_{DS} = 25V$
Reverse transfer capacitance	C_{rss}	—	100	170		$f = 1MHz$
Turn-on time t_{on} ($t_{on} = t_{d(on)} + t_r$)	$t_{d(on)}$	—	50	75	ns	$V_{CC} = 30V$ $I_D = 2,8A$ $V_{GS} = 10V$ $R_{GS} = 50\Omega$
	t_r	—	80	120		
Turn-off time t_{off} ($t_{off} = t_{d(off)} + t_f$)	$t_{d(off)}$	—	330	430		
	t_f	—	110	140		
Fast-recovery reverse diode						
Continuous reverse drain current	I_{DR}	—	—	8,5	A	$T_C = 25^\circ\text{C}$
Pulsed reverse drain current	I_{DRM}	—	—	34		
Diode forward on-voltage	V_{SD}	—	1,3	1,7	V	$I_F = 2 \times I_{DR}$ $V_{GS} = 0V, T_j = 25^\circ\text{C}$
Reverse recovery time	t_{rr}	—	180	250	ns	$T_j = 25^\circ\text{C}$
		—	220	300		$T_j = 150^\circ\text{C}$
Reverse recovery charge	Q_{rr}	—	0,65	1,2	μC	$T_j = 25^\circ\text{C}$
		—	2,6	5,0		$T_j = 150^\circ\text{C}$
Repetitive peak reverse current	I_{RRM}	—	—	—	A	$T_j = 25^\circ\text{C}$
		—	15	—		$T_j = 150^\circ\text{C}$

SIEMENS AKTIENGESELLSCHAFT


Power dissipation $P_D = f(T_C)$

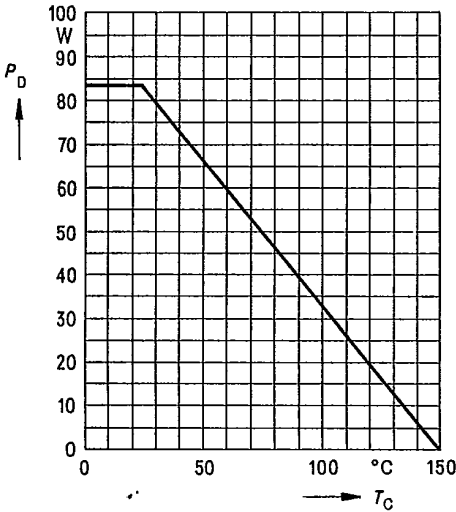


Typical output characteristics $I_D = f(V_{DS})$
parameter: 80 μ s pulse test,
 $T_J = 25^\circ\text{C}$

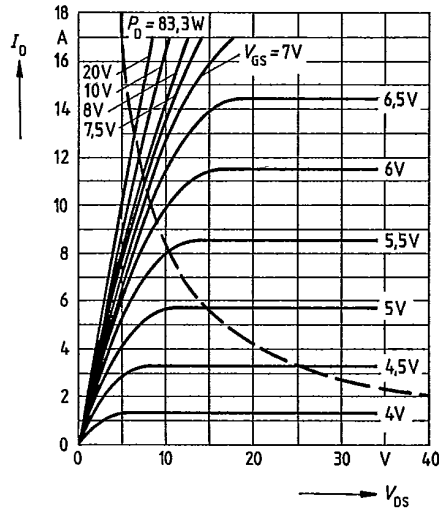

Safe operating area $I_D = f(V_{DS})$
parameter: $D = 0.01$, $T_C = 25^\circ\text{C}$

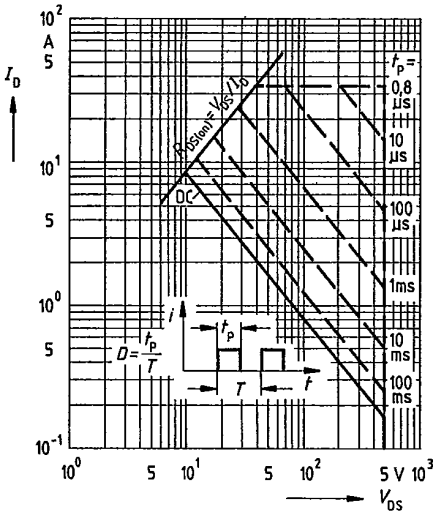


Typical transfer characteristic $I_D = f(V_{GS})$
parameter: 80 μ s pulse test,
 $V_{DS} = 25\text{V}$, $T_J = 25^\circ\text{C}$

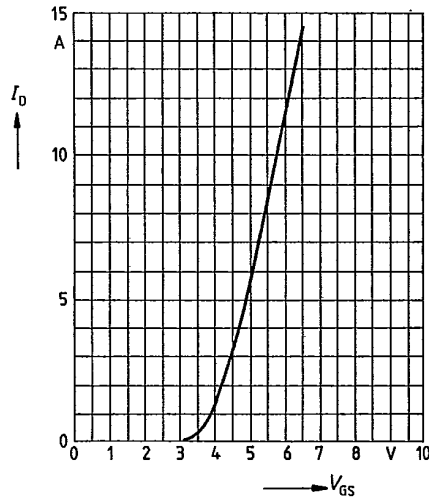

SIEMENS AKTIENGESELLSCHAFT


Typical drain-source on-state resistance

$R_{DS(on)} = f(I_D)$
parameter: $V_{GS} = 10V, T_J = 25^\circ C$

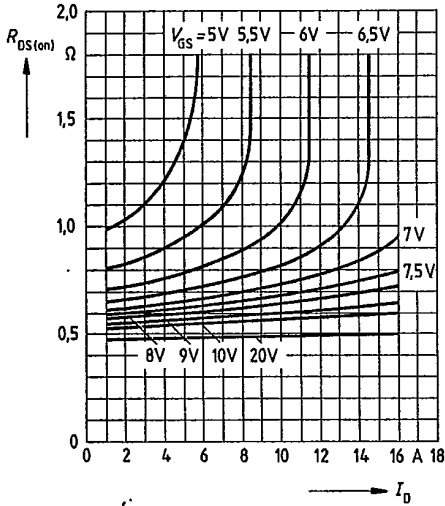


Drain-source on-state resistance

$R_{DS(on)} = f(T_J)$
parameter: $I_D = 5.5A, V_{GS} = 10V$
(spread)

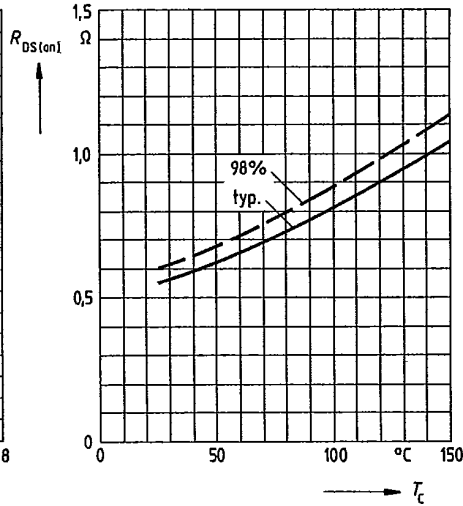


Typical transconductance $g_{fs} = f(I_D)$

parameter: 80 μs pulse test,
 $V_{DS} = 25V, T_J = 25^\circ C$

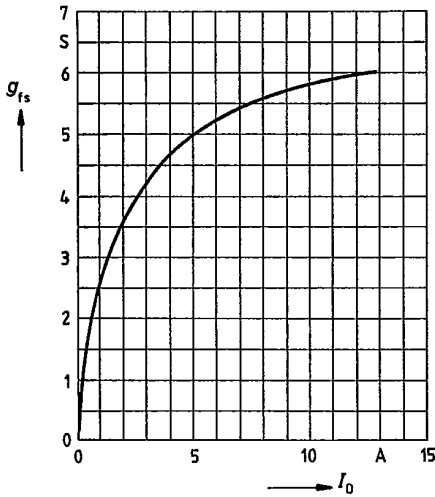


Gate threshold voltage $V_{GS(th)} = f(T_J)$

parameter: $V_{DS} = V_{GS}, I_D = 1mA$
(spread)

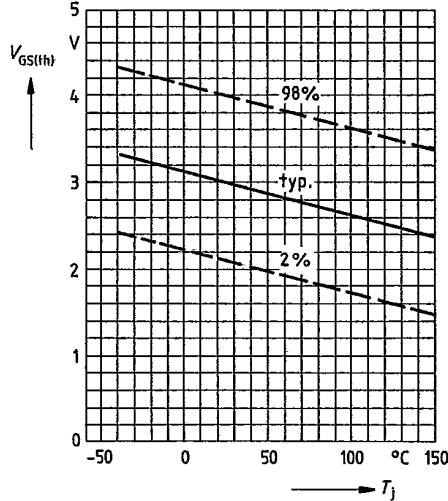


SIEMENS AKTIENGESELLSCHAFT

Typical capacitances $C = f(V_{DS})$
parameter: $V_{GS} = 0, f = 1\text{MHz}$

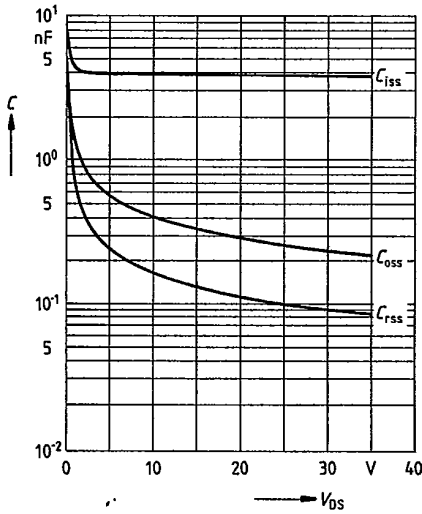


Continuous drain current $I_D = f(T_C)$
parameter: $V_{GS} \geq 10\text{V}$

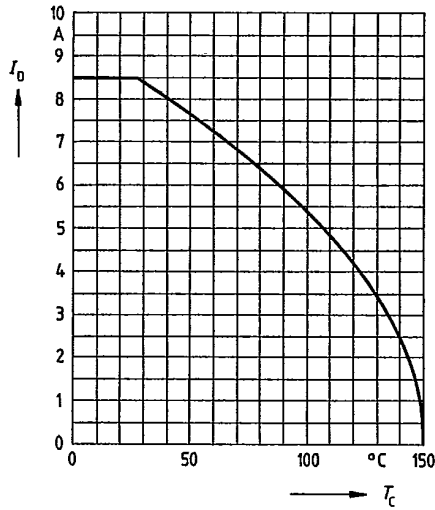

Forward characteristic of reverse diode

$I_F = f(V_{SD})$
parameter: $T_j, t_p = 80 \mu\text{s}$
(spread)

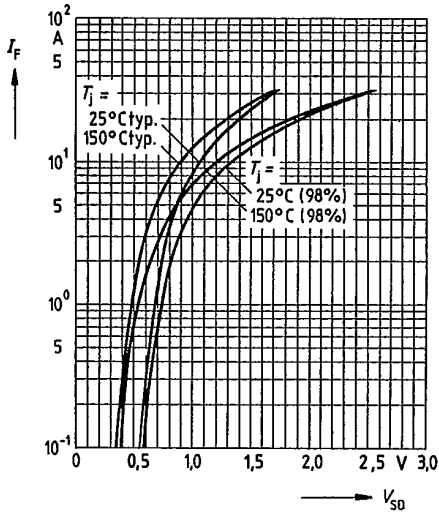


626

1208


B-13

SIEMENS AKTIENGESELLSCHAFT

Transient thermal impedance $Z_{thJC} = f(t)$
 parameter: $D = t_p/T$

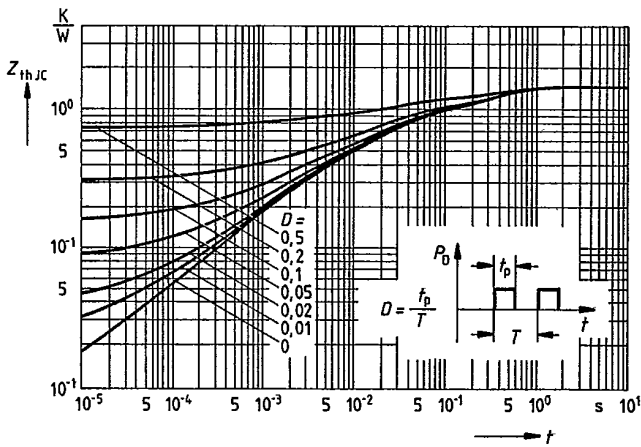

Typical gate-charge $V_{GS} = f(Q_{Gate})$
 parameter: $I_{D\,puls} = 14,4A$

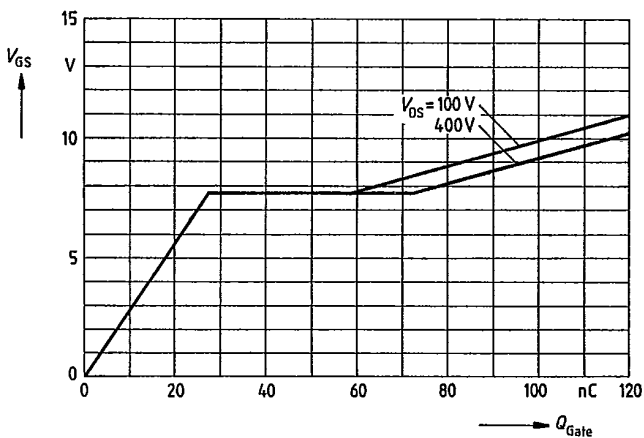



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.