


Glass Passivated Junction Rectifiers

Reverse Voltage
50 to 1000V
Forward Current 2.0A

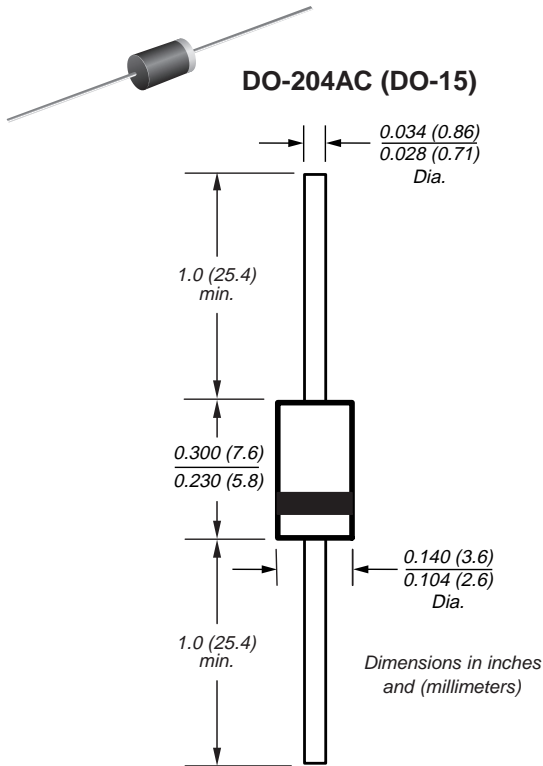

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- Capable of meeting environmental standards of MIL-S-19500
- 2.0 Ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1\mu\text{A}$

Mechanical Data

Case: JEDEC DO-204AC, molded plastic over glass passivated chip

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: $250^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.015 oz., 0.4 g

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	GPP 20A	GPP 20B	GPP 20D	GPP 20G	GPP 20J	GPP 20K	GPP 20M	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{F(AV)}$	2.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	70							A
Typical thermal resistance ⁽¹⁾	$R_{\theta JA}$ $R_{\theta JL}$	25 20							$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	GPP 20A	GPP 20B	GPP 20D	GPP 20G	GPP 20J	GPP 20K	GPP 20M	Unit
Maximum instantaneous forward voltage at 2.0A	V_F	1.1							V
Maximum reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 100^\circ\text{C}$	I_R	5.0 50							μA
Maximum junction capacitance at 4.0V, 1MHz	C_J	25							pF

Note: (1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

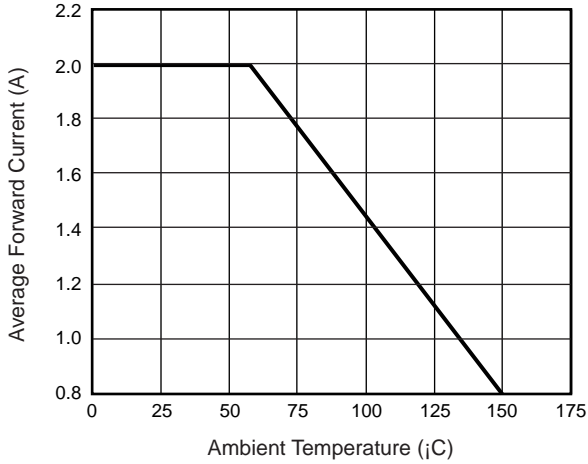


Fig. 2 – Typical Instantaneous Forward Characteristics

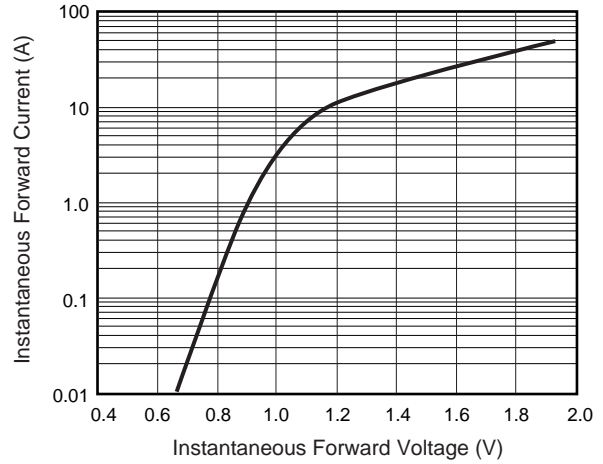


Fig. 3 – Typical Reverse Characteristics


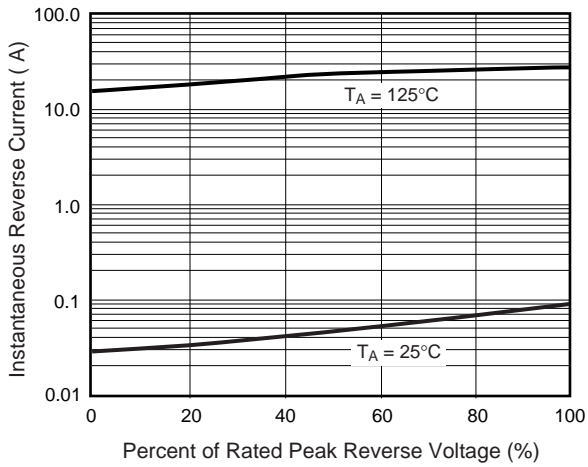


Fig. 4 – Typical Junction Capacitance



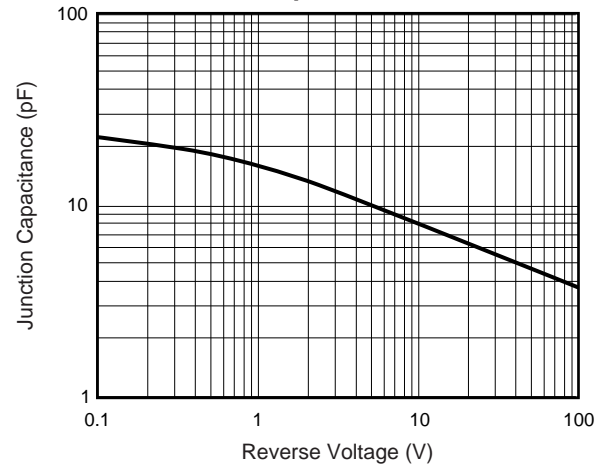

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.