


### Features

- Very Low Forward Voltage Drop
- Guard Ring Die Construction for Transient Protection
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- Surge Overload Rating to 70A Peak

### Mechanical Data

- Case: Molded Plastic
- Plastic Material - UL Flammability Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please See Ordering Information, Note 4, on Page 2
- Polarity: Cathode Band or Cathode Notch
- Approx. Weight: SMA 0.064 grams  
SMB 0.093 grams
- Marking: Type Number

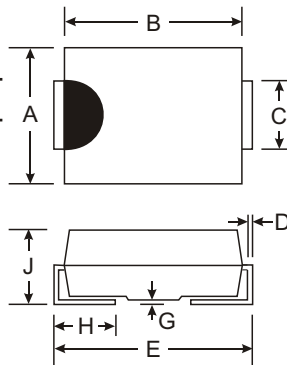

Dim	SMA		SMB	
	Min	Max	Min	Max
A	2.29	2.92	3.30	3.94
B	4.00	4.60	4.06	4.57
C	1.27	1.63	1.96	2.21
D	0.15	0.31	0.15	0.31
E	4.80	5.59	5.00	5.59
G	0.10	0.20	0.10	0.20
H	0.76	1.52	0.76	1.52
J	2.01	2.62	2.00	2.62

All Dimensions in mm

"A" Suffix Designates SMA Package  
 "B" Suffix Designates SMB Package

### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load unless otherwise noted.  
 For capacitive load, derate current by 20%.

Characteristic	Symbol	B340LA/B	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	40	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	28	V
Average Rectified Output Current (Note 1) T <sub>L</sub> = 90°C	I <sub>O</sub>	3.0	A
Non-Repetitive Peak Forward Surge Current, single sine-wave superimposed on rated load, 60Hz	I <sub>FSM</sub>	70	A
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-40 to +125	°C

### Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified


Characteristic	Symbol	Min	Typ	Max	Unit	Conditions
Reverse Breakdown Voltage (Note 2)	V <sub>(BR)R</sub>	40	—	—	—	I <sub>R</sub> = 2.0mA
Forward Voltage Drop (Note 2)	V <sub>FM</sub>	—	0.310	0.350 0.450	V	I <sub>F</sub> = 1.0A I <sub>F</sub> = 3.0A
Leakage Current (Note 2)	I <sub>RM</sub>	—	—	150	uA	V <sub>R</sub> = 15V
				1.0 2.0	mA	V <sub>R</sub> = 20V V <sub>R</sub> = 40V
Typical Total Capacitance	C <sub>T</sub>	—	180	—	pF	f = 1MHz, V <sub>R</sub> = 4.0VDC
Typical Thermal Resistance, Junction to Terminal	R <sub>θJT</sub>	—	25	—	°C/W	Mounted on alumina substrate

- Notes: 1. When mounted on alumina substrate, 180° half sine wave.  
 2. Short duration test pulse used to minimize self-heating effect.


**Ordering Information** (Note 3 & 4)

Device	Packaging	Shipping
B340LA-13 B340LB-13	SMA SMB	5000/Tape & Reel 3000/Tape & Reel


- Notes:
- For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
  - For lead free terminal plating part number, please add "-F" suffix to part number above. Example: B340LA-13-F.




XXX = Product type marking code, ex: B340LA (SMA package)  
 XXXX = Product type marking code, ex: B340LB (SMB package)  
 DII = Manufacturers' code marking  
 YWW = Date code marking  
 Y = Last digit of year ex: 2 for 2002  
 WW = Week code 01 to 52

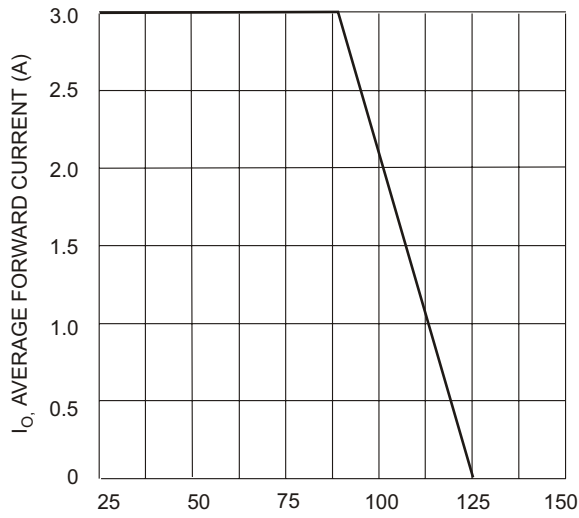


$T_T$ , TERMINAL TEMPERATURE (°C)  
Fig. 1 Forward Current Derating Curve

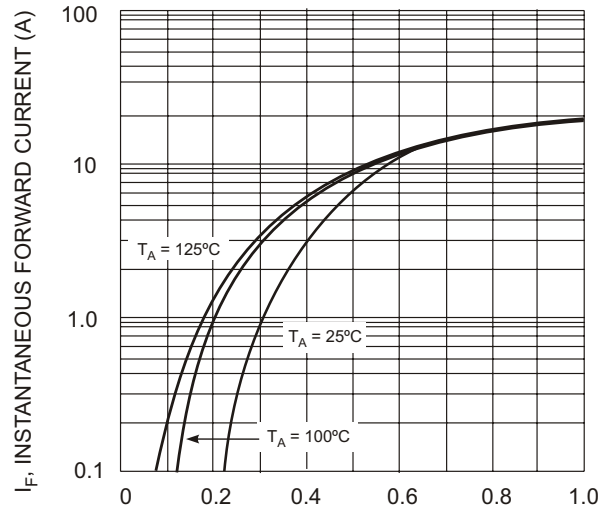


$V_F$ , INSTANTANEOUS FORWARD VOLTAGE (V)  
Fig. 2 Typical Forward Characteristics

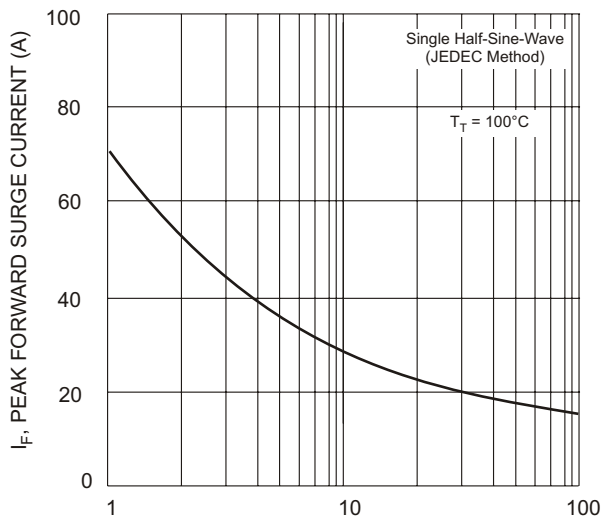

NUMBER OF CYCLES AT 60 Hz  
Fig. 3 Max Non-Repetitive Peak Forward Surge Current

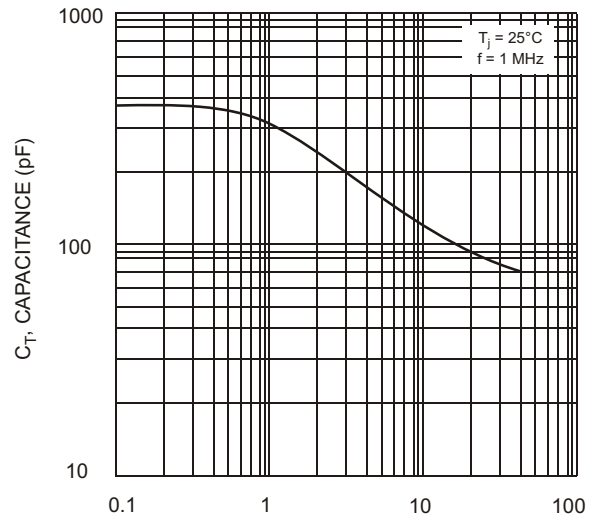

$V_R$ , REVERSE VOLTAGE (V)  
Fig. 4 Typical Total Capacitance

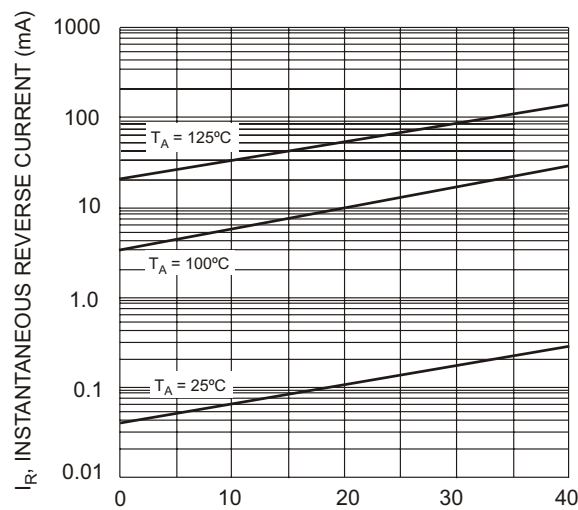

$V_R$ , INSTANTANEOUS REVERSE VOLTAGE (V)  
Fig. 5 Typical Reverse Characteristics



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.