

**1N6620 thru
1N6625**
ULTRA FAST RECTIFIERS

Features

- AXIAL AND SURFACE MOUNT CONFIGURATIONS
- HIGH VOLTAGE WITH ULTRA FAST RECOVERY TIME
- VERY LOW SWITCHING LOSS AT HIGH TEMPERATURE
- LOW CAPACITANCE
- METALLURGICALLY BONDED
- NON-CAVITY GLASS PACKAGE
- SURFACE MOUNT DIODES THERMALLY MATCHED FOR USE ON CERAMIC PRINTED WIRING BOARDS
- AXIAL AND SURFACE MOUNT AVAILABLE AS JANTX AND JANTXV PER MIL-S-19500/585

Maximum Ratings @ 25°C

TYPE NUMBER	REVERSE VOLTAGE	OPERATING CURRENT (Note 1)	OPERATING CURRENT (Note 3)	PEAK FORWARD SURGE CURRENT (Note 2)	R _θ JL L = .375"	R _θ JEC
1N6620 and US	200	2.0A	1.2A	20A	38°C/W	20°C/W
1N6621 and US	400	2.0A	1.2A	20A	38°C/W	20°C/W
1N6622 and US	600	2.0A	1.2A	20A	38°C/W	20°C/W
1N6623 and US	800	1.5A	1.0A	20A	38°C/W	20°C/W
1N6624 and US	900	1.5A	1.0A	20A	38°C/W	20°C/W
1N6625 and US	1000	1.5A	1.0A	15A	38°C/W	20°C/W

Operating Temperature: -65°C to +175°C.

Storage Temperature: -65°C to +200°C.

Note 1: TL = +55°C, L = .375 inch for axial parts. Derate linearly at 0.80% / °C for TL > +55°C. For surface mount devices, US suffix, these currents apply with a maximum end cap temperature of 110°C. Derate linearly at 1.5% / °C above 110°C.

Note 2: Test pulse = 8.3ms, half sine wave.

Note 3: Independent of heatsinking.

Electrical Characteristics @ 25°C

TYPE NUMBER	MINIMUM BREAK-DOWN VOLTAGE V _R I _R = 50μA	MAXIMUM FORWARD VOLTAGE V _F @ I _F		MAXIMUM D.C. REVERSE CURRENT @ RATED REVERSE VOLTAGE I _R		MAXIMUM REVERSE RECOVERY TIME t _{rr} Note 1	MAXIMUM JUNCTION CAPACITANCE C _J V _R = 10V	PEAK RECOVERY CURRENT I _{RM} (ave.) I _F = 2A, I _F = 0.5A tr = 12ns	FORWARD RECOVERY VOLTAGE V _{FRM} Max. I _F = 0.5A
		V @ A	V @ A	μA	μA				
		TA=25°C	TA=150°C	TA=25°C	TA=150°C				
	V	V @ A	V @ A	μA	μA	ns	pf	A	V
1N6620 and US	220	1.40V @ 1.2A	1.60V @ 2.0A	0.5	150	30	10	3.5	12
1N6621 and US	440	1.40V @ 1.2A	1.60V @ 2.0A	0.5	150	30	10	3.5	12
1N6622 and US	660	1.40V @ 1.2A	1.60V @ 2.0A	0.5	150	30	10	3.5	12
1N6623 and US	880	1.55V @ 1.0A	1.80V @ 1.5A	0.5	150	50	10	4.2	18
1N6624 and US	990	1.55V @ 1.0A	1.80V @ 1.5A	0.5	150	50	10	4.2	18
1N6625 and US	1100	1.75V @ 1.0A	1.95V @ 1.5A	1.0	200	60	10	5.0	30

NOTE 1: Reverse Recovery Time Test Conditions: I_F = 0.5A, I_{RM} = 1.0A, I_{R(REC)} = 0.25A.




FIGURE 2
Typical Forward Current vs Forward Voltage




FIGURE 3
Typical Forward Current vs Forward Voltage




Figure 1A
Package A
Axial

**1N6620US
thru
1N6625US**




Figure 1B
Package A
Surface
Mount

	Inch		mm	
	MIN.	MAX.	MIN.	MAX.
A	0.185	0.200	4.699	5.080
B	0.019	0.028	0.483	0.711
C	0.003	—	0.076	—
D	0.097	0.103	2.464	2.616

Mechanical Characteristics

AXIAL LEADED DEVICES

CASE: Voidless Hermetically Sealed Hard Glass.

LEAD MATERIAL: Solder Dipped Copper.

MARKING: Body Painted, Alpha Numeric.

POLARITY: Cathode Band.

SURFACE MOUNT DEVICES

CASE: Voidless Hermetically Sealed Hard Glass.

END CAP MATERIAL: Solid Silver.

END CAP CONFIGURATION: Square.

POLARITY: Cathode Dot on End Cap.

1N6620 thru 1N6625 AXIAL LEADED 1N6620US thru 1N6625US SURFACE MOUNT

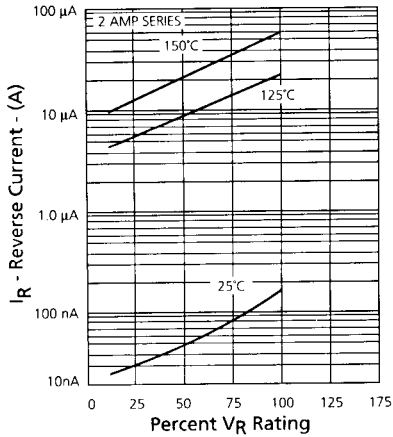


FIGURE 4
Typical Reverse Current vs
Applied Reverse Voltage

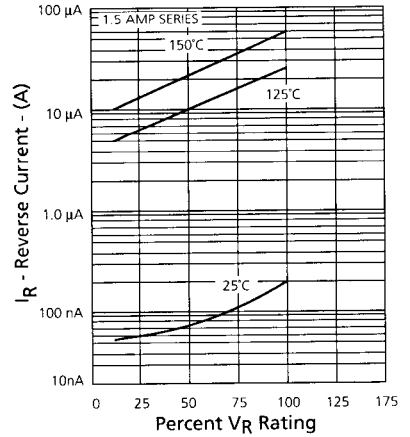


FIGURE 5
Typical Reverse Current vs
Applied Reverse Voltage

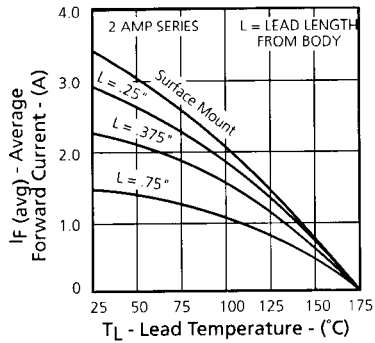


FIGURE 6
Average Forward Current vs
Lead Temperature (50% Duty Cycle, Square Wave)

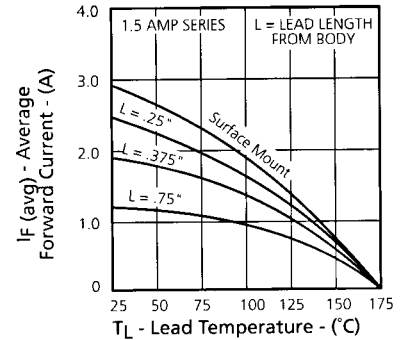


FIGURE 7
Average Forward Current vs
Lead Temperature (50% Duty Cycle, Square Wave)

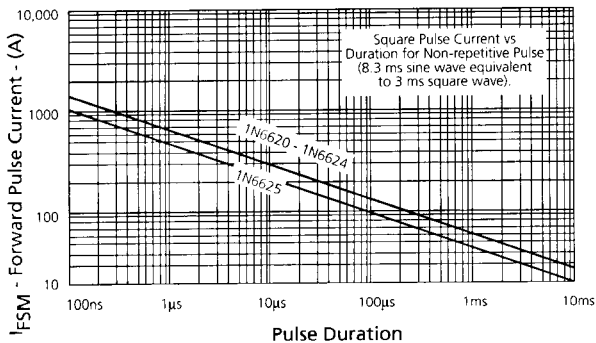


FIGURE 8
Forward Pulse Current vs Pulse Duration

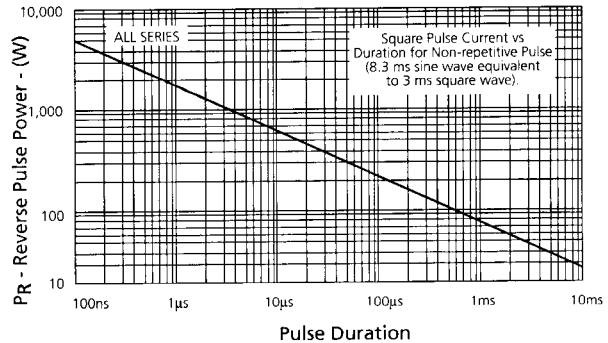


FIGURE 9
Reverse Pulse Power vs Pulse Duration



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.