

• 1N6638, 1N6642, 1N6643 AVAILABLE IN JAN, JANTX, JANTXV, AND JANS
PER MIL-PRF-19500/578

- SWITCHING DIODES
- NON-CAVITY GLASS PACKAGE
- METALLURGICALLY BONDED

1N6638

1N6642

1N6643

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
Operating Current: 300 mA
Derating: 3.0 mA/°C Above $T_L = +75^\circ\text{C}$ @ $L = 3/8"$
Surge Current: $I_{FSM} = 2.5\text{A}$, half sine wave, $P_W = 8.3\text{ms}$

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

TYPES	V_{BR} @ I_R = 100 μA	V_{RWM}	V_{F1} I_{FM} = 10 mA (Pulsed)	V_{F2} @ I_{F2} (Pulsed)		t_{fr} I_F = 50 mA	t_{rr}
	$V_{(PK)}$ (min)	$V_{(PK)}$	V dc	V dc	mA	ns	ns
1N6638	150	125	0.8	1.1	200	20	4.5
1N6642	100	75	1.0	1.2	100	20	5.0
1N6643	75	50	1.0	1.2	100	20	6.0

TYPES	I_{R1}	I_{R2}	I_{R3}	I_{R4}	C_{T1}	C_{T2}
	V_R = 20 V	@ V_R = V_{RWM}	$V_R = 20\text{V}$ $T_A = 150^\circ\text{C}$	$V_R = V_{RWM}$ $T_A = 150^\circ\text{C}$	$V_R =$ 0V	$V_R =$ 1.5V
	nA dc	μA dc	μA dc	μA dc	pF	pF
1N6638	35	0.5	50	100	2.5	2.0
1N6642	25	0.5	50	100	5.0	2.8
1N6643	50	0.5	75	160	5.0	2.8

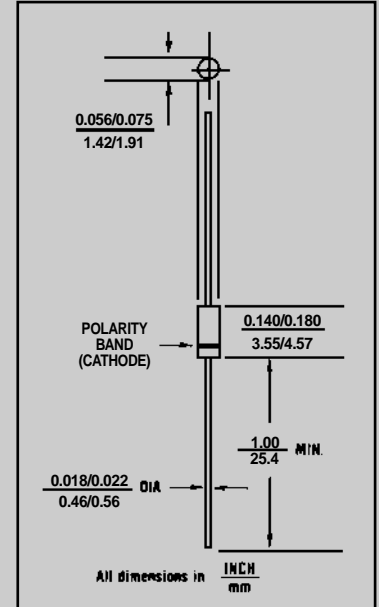


FIGURE 1

DESIGN DATA

CASE: Hermetically sealed, "D" Body per MIL-PRF- 19500/578. D-5D

LEAD MATERIAL: Copper clad steel

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ($R_{\theta JL}$): 160 °C/W maximum at $L = .375$

THERMAL IMPEDANCE: ($Z_{\theta JX}$): 25 °C/W maximum

POLARITY: Cathode end is banded.

MOUNTING POSITION: Any



COMPENSATED DEVICES INCORPORATED

22 COREY STREET, MELROSE, MASSACHUSETTS 02176
PHONE (781) 665-1071 FAX (781) 665-7379
WEBSITE: <http://www.cdi-diodes.com> E-mail: mail@cdi-diodes.com

IN6638, IN6642 and IN6643

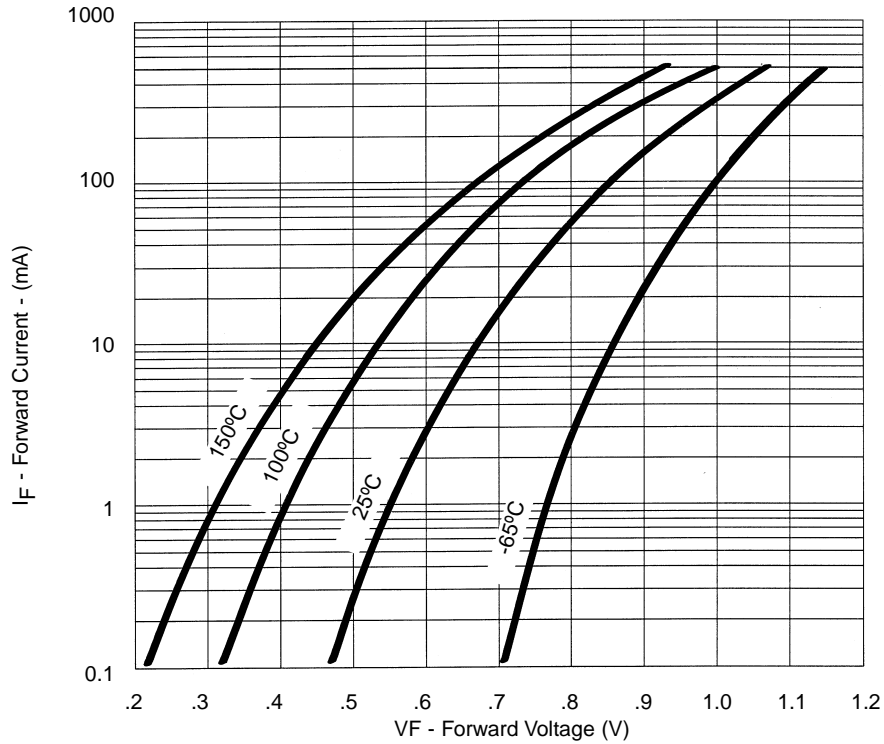


FIGURE 2
Typical Forward Current
vs Forward Voltage

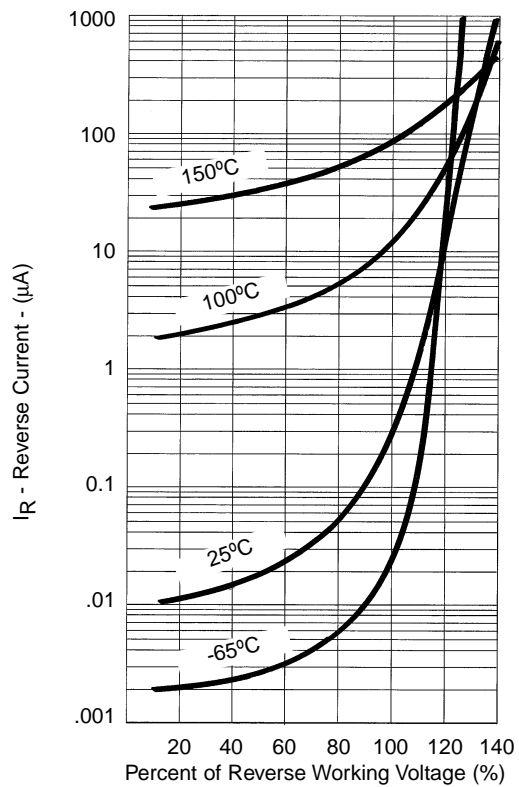


FIGURE 3
Typical Reverse Current
vs Reverse Voltage

NOTE : All temperatures shown on graphs are junction temperatures



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.