


BAT17WS

SCHOTTKY DIODES

SOD-323

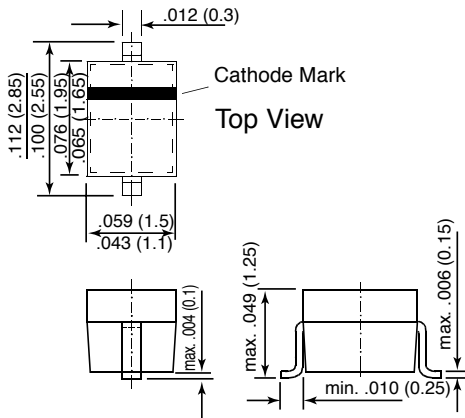

Dimensions in inches and (millimeters)

FEATURES

- ◆ Low turn-on voltage
- ◆ Low capacitance
- ◆ Ultrafast switching
- ◆ Microminiature plastic package
- ◆ Single, double, and ring balanced mixer in narrow-band receivers up to 1 GHz
- ◆ Detectors and fast switching up to 1 GHz
- ◆ Phase detectors
- ◆ Suitable for radios, TV, CTV, and hyperband tuners
- ◆ These diodes are also available in SOT-23 with type designation BAT17, and SOD-123 with type designation BAT17W



MECHANICAL DATA

Case: SOD-323 Plastic Package

Weight: approx. 0.004 g

Marking Code: L7

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOL	VALUE	UNIT
Minimum Reverse Breakdown Voltage at 10 μ A	V _R	4	Volts
Forward Current	I _F	30	mA
Power Dissipation T _C = 25°C	P _{tot}	150 (NOTE 1)	mW
Maximum Leakage Current at V _R = 3V at V _R = 3V, T _{amb} = 60°C	I _R I _R	0.25 1.25	μ A μ A
Maximum Forward Voltage at I _F = 10 mA	V _F	600	mV
Maximum Diodes Capacitance at V _R = 0 V, f = 1 MHz	C _D	1.0	pF
Thermal Resistance Junction to Ambient Air	R _{thja}	650 (NOTE 1)	°C/W
Junction Temperature	T _j	125	°C
Storage Temperature Range	T _s	-65 to + 150	°C

NOTES:

(1) Valid provided that electrodes are kept at ambient temperature



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.