

SOT223 PNP SILICON PLANAR MEDIUM POWER DARLINGTON TRANSISTOR

FZT704


ISSUE 2 - SEPTEMBER 1995

FEATURES

- * 2A CONTINUOUS CURRENT
- * FAST SWITCHING
- * GUARANTEED h_{FE} SPECIFIED UP TO 2A

COMPLEMENTARY TYPE – FZT 604

PART MARKING DETAIL – FZT704



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	-120	V
Collector-Emitter Voltage	V_{CEO}	-100	V
Emitter-Base Voltage	V_{EBO}	-10	V
Peak Pulse Current	I_{CM}	-4	A
Continuous Collector Current	I_C	-1.5	A
Power Dissipation	P_{TOT}	2	W
Operating and Storage Temperature Range	tj:tstg	-55 to +150	°C


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Breakdown Voltages	$V_{(BR)CBO}$	-120			V	$I_C = 100\mu\text{A}$
	$V_{(BR)CEO}$	-100			V	$I_C = 10\text{mA}$
	$V_{(BR)EBO}$	-10			V	$I_E = 100\mu\text{A}$
Collector Cut-Off Currents	I_{CBO}			-0.1	μA	$V_{CB} = 100\text{V}$
	I_{CES}			-10	μA	$V_{CB} = 100\text{V}, T_{amb} = 100^\circ\text{C}$
Emitter Cut-Off Current	I_{EBO}			-0.1	μA	$V_{EB} = 8\text{V}$
Saturation Voltages	$V_{CE(sat)}$			-1.3 -2.5	V	$I_C = 1\text{A}, I_B = 1\text{mA}^*$ $I_C = 2\text{A}, I_B = 2\text{mA}^*$
	$V_{BE(sat)}$			-1.8	V	$I_C = 1\text{A}, I_B = 10\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$			-1.7	V	$I_C = 1\text{A}, V_{CE} = 5\text{V}$
Static Forward Current Transfer	h_{FE}	3000 3000 3000 2000		30000		$I_C = 10\text{mA}, V_{CE} = 5\text{V}^*$ $I_C = 100\text{mA}, V_{CE} = 5\text{V}^*$ $I_C = 1\text{A}, V_{CE} = 5\text{V}^*$ $I_C = 2\text{A}, V_{CE} = 5\text{V}^*$
Transition Frequency	f_T		160		MHz	$I_C = 100\text{mA}, V_{CE} = 10\text{V}$ $f = 20\text{MHz}$
Input Capacitance	C_{ibo}		90		pF	$V_{EB} = 0.5\text{V}, f = 1\text{MHz}$
Output Capacitance	C_{obo}		15		pF	$V_{EB} = 10\text{V}, f = 1\text{MHz}$
Switching Times	T_{on}		0.6		μs	$I_C = 0.5\text{A}, V_{CE} = 10\text{V}$
	T_{off}		0.8		μs	$I_{B1} = I_{B2} = 0.5\text{mA}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
Spice parameter data is available upon request for this device
For typical graphs see FZT705 datasheet

FZT705 FZT704

TYPICAL CHARACTERISTICS

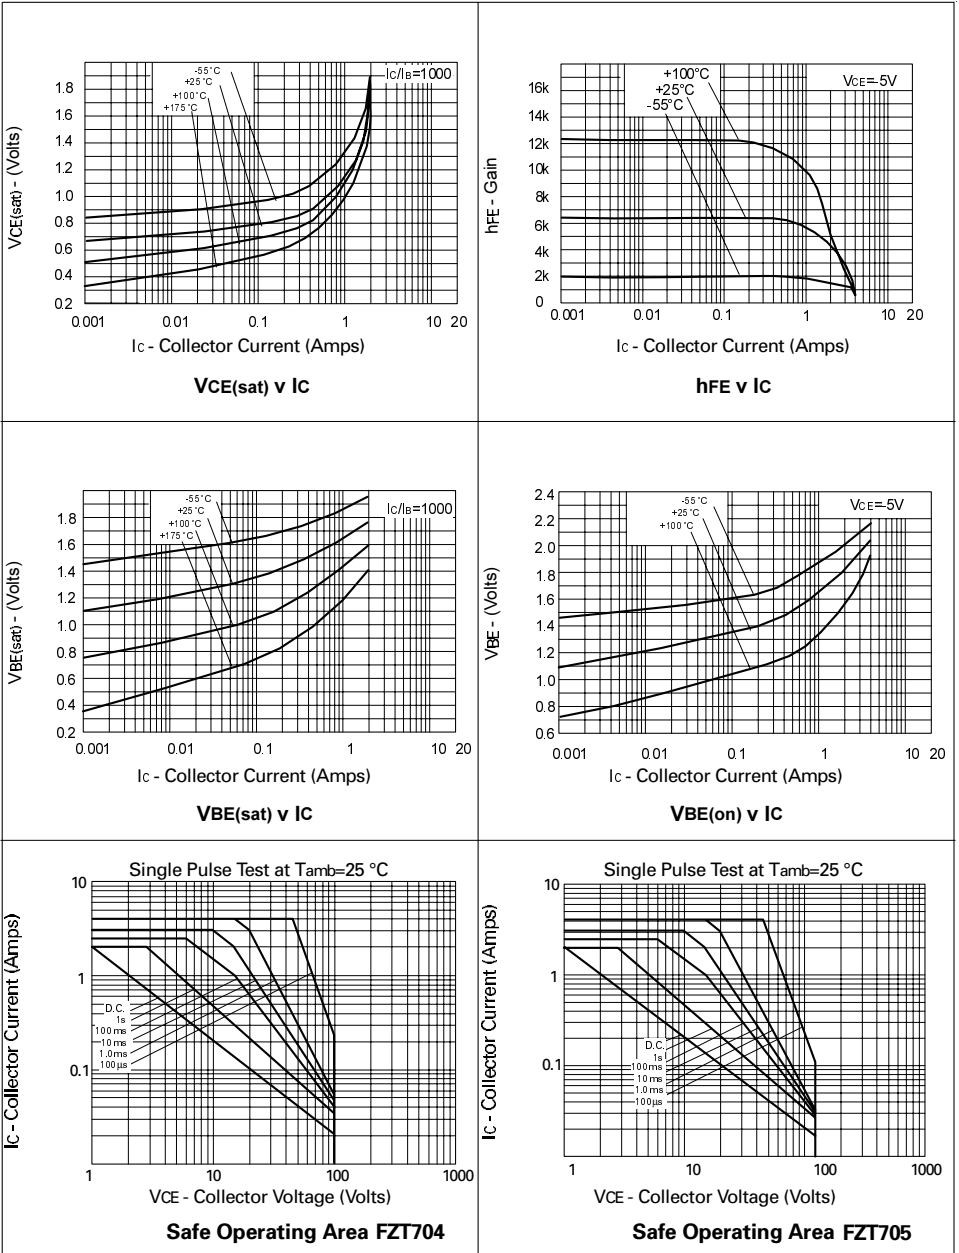



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.