

SOT23 NPN SILICON PLANAR AVALANCHE TRANSISTOR

FMMT413


PROVISIONAL DATASHEET ISSUE 2 – MARCH 1996

FEATURES

- * Avalanche mode operation
- * 50A Peak avalanche current
- * Low inductance packaging

APPLICATIONS

- * Laser LED drivers
- * Fast edge generation
- * High speed pulse generators



PARTMARKING DETAIL - 413

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	150	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	6	V
Continuous Collector Current	I_C	100	mA
Peak Collector Current (25ns Pulse Width)	I_{CM}	50	A
Power Dissipation	P_{tot}	330	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	°C

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Emitter Breakdown Voltage	$V_{(BR)CES}$	150			V	$I_C=100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{CEO(sus)}$	50			V	$I_C=10\text{mA}$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6			V	$I_E=100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			0.1	μA	$V_{CE}=120\text{V}$
Emitter Cut-Off Current	I_{EBO}			0.1	μA	$V_{EB}=4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			0.15	V	$I_C=10\text{mA}, I_B=1\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			0.8	V	$I_C=10\text{mA}, I_B=1\text{mA}$
Current in Second Breakdown (Pulsed)	I_{USB}	22 31			A A	$V_C=110\text{V}, C_{CE}=4.7\text{nF}^*$ $V_C=130\text{V}, C_{CE}=4.7\text{nF}^*$
Static Forward Current Transfer Ratio	h_{FE}	50				$I_C=10\text{mA}, V_{CE}=10\text{V}$


*Measured within a circuit possessing an approximate loop inductance of 12nH. The $I_{(USB)}$ monitor circuitry reflects 0.15 Ohm into the Collector-Emitter Discharge Loop
The FMMT413 device is a development product. Samples availability and release to production scheduled for June 1996

FMMT413

ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Emitter Inductance	L_e		2.5		nH	Standard SOT23 leads
Transition Frequency	f_T		150		MHz	$I_C=10mA$, $V_{CE}=5V$ $f=20MHz$
Collector-Base Capacitance	C_{cb}		2		pF	$V_{CB}=10V$, $I_E=0$ $f=1MHz$

TYPICAL CHARACTERISTICS

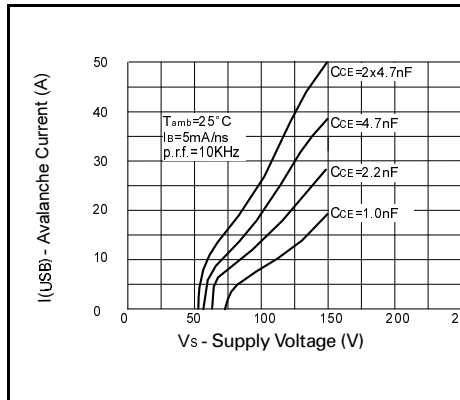



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.