

SOT23 NPN SILICON PLANAR AVALANCHE TRANSISTOR

FMMT415 FMMT417

ISSUE 4 - OCTOBER 1995




FEATURES

- * Specifically designed for Avalanche mode operation
- * 60A Peak Avalanche Current (Pulse width=20ns)

APPLICATIONS

- * Laser LED drivers
- * Fast edge generation
- * High speed pulse generators

PARTMARKING DETAIL – FMMT415 – 415
FMMT417 – 417



ABSOLUTE MAXIMUM RATINGS.


PARAMETER	SYMBOL	FMMT415	FMMT417	UNIT
Collector-Base Voltage	V_{CBO}	260	320	V
Collector-Emitter Voltage	V_{CEO}	100	100	V
Emitter-Base Voltage	V_{EBO}	6		V
Continuous Collector Current	I_C	500		mA
Peak Collector Current (Pulse Width=20ns)	I_{CM}	60		A
Power Dissipation	P_{tot}	330		mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150		°C

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ unless otherwise stated).


PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	FMMT415	$V_{(BR)CES}$	260			V	$I_C=1\text{mA}$ $T_{amb} = -55 \text{ to } +150^\circ\text{C}$
	FMMT417		320			V	$I_C=1\text{mA}$
Collector-Emitter Breakdown Voltage		$V_{CEO(sus)}$	100			V	$I_C=100\mu\text{A}$
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	6			V	$I_E=10\mu\text{A}$
Collector Cut-Off Current		I_{CBO}			0.1 10	μA μA	$V_{CB}=180\text{V}$ $V_{CE}=180\text{V}$ $T_{amb}=100^\circ\text{C}$
Emitter Cut-Off Current		I_{EBO}			0.1	μA	$V_{EB}=4\text{V}$
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			0.5	V	$I_C=10\text{mA}$, $I_B=1\text{mA}^*$
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			0.9	V	$I_C=10\text{mA}$, $I_B=1\text{mA}^*$
Current in Second Breakdown (Pulsed)		I_{SB}	15 25			A A	$V_C=200\text{V}$, $C_{CE}=620\text{pF}$ $V_C=250\text{V}$, $C_{CE}=620\text{pF}$
Static Forward Current Transfer Ratio		h_{FE}	25				$I_C=10\text{mA}$, $V_{CE}=10\text{V}^*$
Transition Frequency		f_T	40			MHz	$I_C=10\text{mA}$, $V_{CE}=20\text{V}$ $f=20\text{MHz}$
Collector-Base Capacitance		C_{cb}			8	pF	$V_{CB}=20\text{V}$, $I_E=0$ $f=100\text{MHz}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$


TYPICAL CHARACTERISTICS

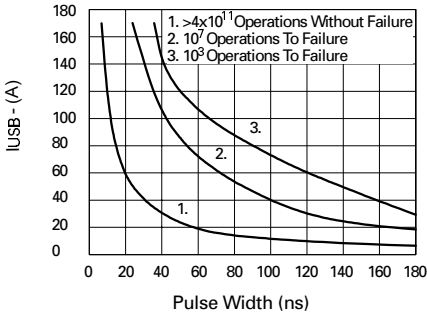


**Maximum Avalanche Current
v Pulse Width**

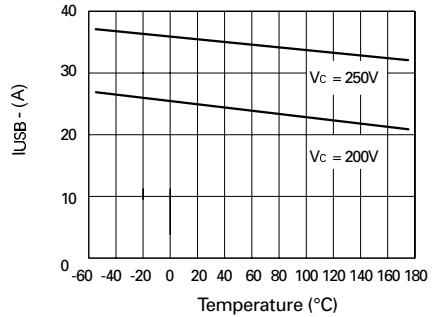


**IUSB v Temperature
for the specified conditions**

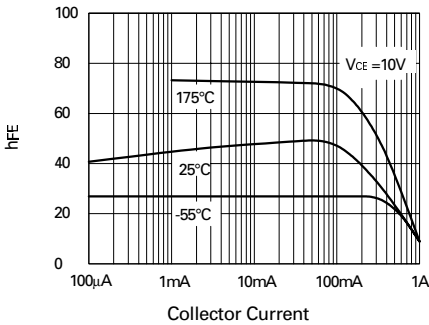


hFE v IC

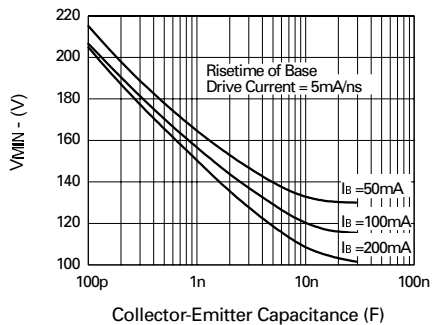

**Minimum starting voltage
as a function of capacitance**

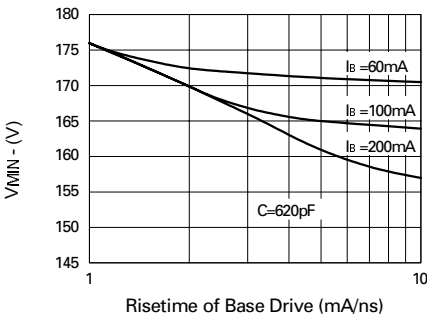

**Minimum starting voltage
as a function of drive current**

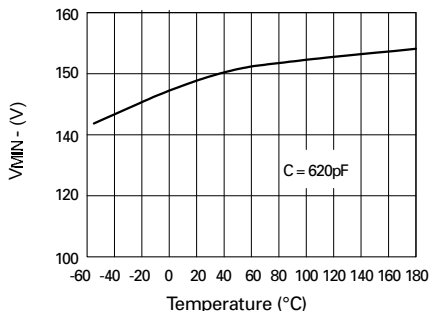

**Minimum starting voltage
as a function of temperature**



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.