

SOT23 PNP SILICON PLANAR HIGH VOLTAGE TRANSISTOR


FMMT560

ISSUE 1 – NOVEMBER 1998

FEATURES

- * Excellent h_{FE} characteristics up to $I_C=50\text{mA}$
- * Low Saturation voltages

PARTMARKING DETAIL – 560



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	-500	V
Collector-Emitter Voltage	V_{CEO}	-500	V
Emitter-Base Voltage	V_{EBO}	-5	V
Peak Pulse Current	I_{CM}	-500	mA
Continuous Collector Current	I_C	-150	mA
Power Dissipation	P_{tot}	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	°C







ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-500		V	$I_C=-100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{BR(CEO)}$	-500		V	$I_C=-10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5		V	$I_E=-100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}; I_{CES}$		-100	nA	$V_{CB}=-500\text{V}; V_{CE}=-500\text{V}$
Emitter Cut-Off Current	I_{EBO}		-100	nA	$V_{EB}=-5\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.2 -0.5	V V	$I_C=-20\text{mA}, I_B=-2\text{mA}^*$ $I_C=-50\text{mA}, I_B=-10\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.9	V	$I_C=-50\text{mA}, I_B=-10\text{mA}^*$
Base-Emitter Turn On Voltage	$V_{BE(on)}$		-0.9	V	$I_C=-50\text{mA}, V_{CE}=-10\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	100 80 15 typ	300 300		$I_C=-1\text{mA}, V_{CE}=-10\text{V}$ $I_C=-50\text{mA}, V_{CE}=-10\text{V}^*$ $I_C=-100\text{mA}, V_{CE}=-10\text{V}^*$
Transition Frequency	f_T	60		MHz	$V_{CE}=-20\text{V}, I_C=-10\text{mA}, f=50\text{MHz}$
Output Capacitance	C_{obo}		8	pF	$V_{CB}=-20\text{V}, f=1\text{MHz}$
Switching times	t_{on} t_{off}	110 typ. 1.5 typ.		ns μs	$V_{CE}=-100\text{V}, I_C=-50\text{mA}, I_{B1}=-5\text{mA}, I_{B2}=10\text{mA}$

* Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

FMMT560

TYPICAL CHARACTERISTICS

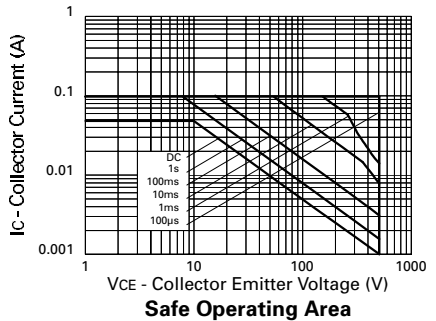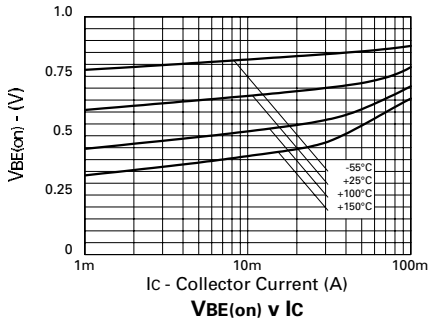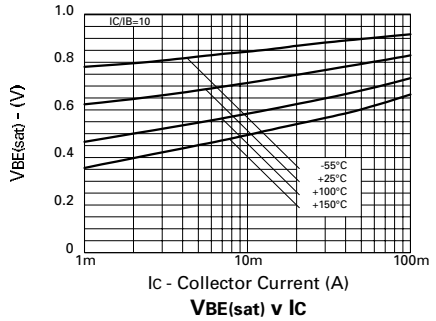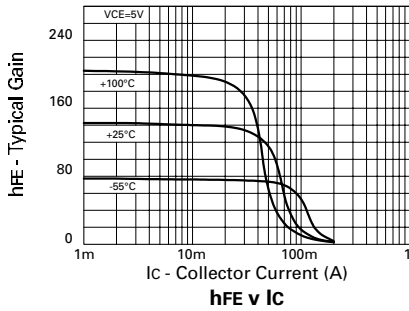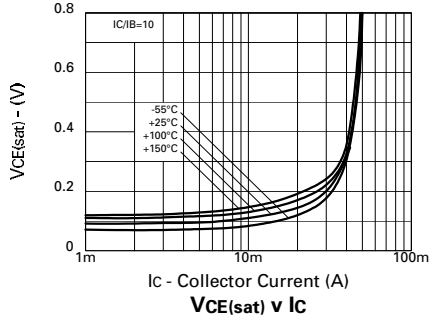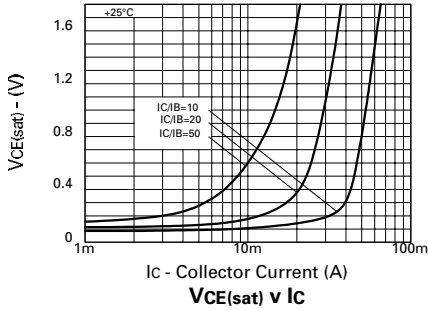



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.