

# SOT223 PNP SILICON PLANAR MEDIUM POWER HIGH GAIN TRANSISTOR

## FZT790A

ISSUE 3 - OCTOBER 1995

### FEATURES


- \* Very low equivalent on-resistance;  $R_{CE(sat)}$  125m $\Omega$  at 2A
- \* Gain of 200 at  $I_C=1$  Amp and very low saturation voltage

### APPLICATIONS

- \* DC-DC converters, Siren drivers.

COMPLEMENTARY TYPE - FZT690B

PARTMARKING DETAIL - FZT790A



### ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$V_{CBO}$	-50	V
Collector-Emitter Voltage	$V_{CEO}$	-40	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Peak Pulse Current	$I_{CM}$	-6	A
Continuous Collector Current	$I_C$	-3	A
Power Dissipation at $T_{amb}=25^\circ\text{C}$	$P_{tot}$	2	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ\text{C}$


### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ )

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Breakdown Voltages	$V_{(BR)CBO}$	-50	-70		V	$I_C=-100\mu\text{A}$
	$V_{(BR)CEO}$	-40	-60		V	$I_C=-10\text{mA}^*$
	$V_{(BR)EBO}$	-5	-8.5		V	$I_E=-100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}$			-0.1 -10	$\mu\text{A}$	$V_{CB}=-30\text{V}$ $V_{CB}=-30\text{V}, T_{amb}=100^\circ\text{C}$
Emitter Cut-Off Current	$I_{EBO}$			-0.1	$\mu\text{A}$	$V_{EB}=-4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.15 -0.30 -0.40	-0.25 -0.45 -0.75	V	$I_C=500\text{mA}, I_B=5\text{mA}^*$ $I_C=1\text{A}, I_B=10\text{mA}^*$ $I_C=2\text{A}, I_B=50\text{mA}^*$
			-0.8	-1.0	V	$I_C=1\text{A}, I_B=10\text{mA}^*$
					V	$I_C=1\text{A}, V_{CE}=-2\text{V}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		-0.75		V	$I_C=1\text{A}, V_{CE}=-2\text{V}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	300		800		$I_C=10\text{mA}, V_{CE}=-2\text{V}$
		250				$I_C=500\text{mA}, V_{CE}=-2\text{V}^*$
		200				$I_C=1\text{A}, V_{CE}=-2\text{V}^*$
		150				$I_C=2\text{A}, V_{CE}=-2\text{V}^*$
Transition Frequency	$f_T$	100			MHz	$I_C=50\text{mA}, V_{CE}=-5\text{V}$ $f=50\text{MHz}$
Output Capacitance	$C_{obo}$		24		pF	$V_{CB}=-10\text{V}, f=1\text{MHz}$
Switching Times	$t_{on}$		35		ns	$I_C=500\text{mA},$ $I_{B1}=-50\text{mA},$ $I_{B2}=-50\text{mA}, V_{CC}=-10\text{V}$
	$t_{off}$		600		ns	

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$   
Spice parameter data is available upon request for this device

# FZT790A

## TYPICAL CHARACTERISTICS

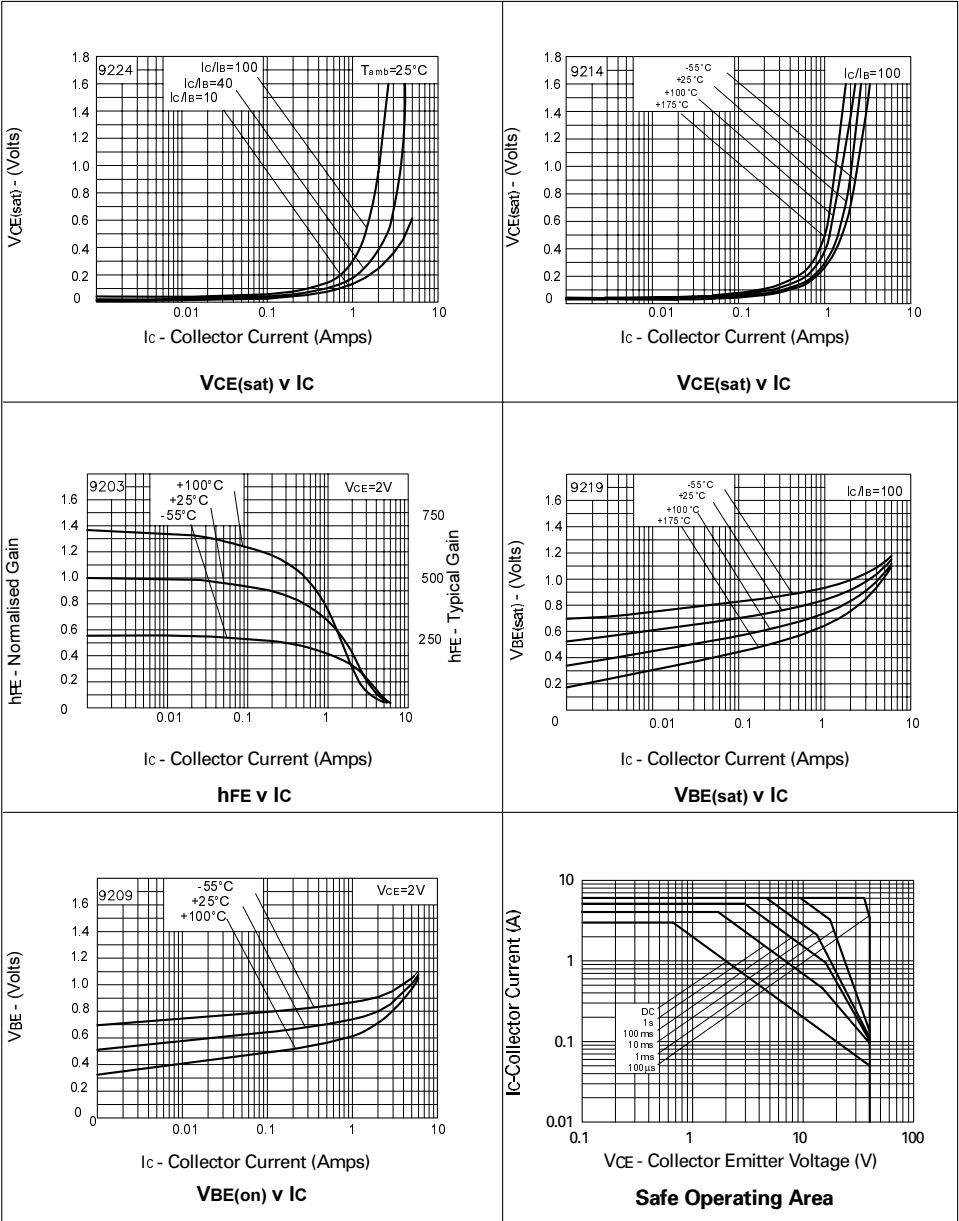



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.