

# SOT23 PNP SILICON PLANAR MEDIUM POWER TRANSISTOR

## FMMT591A


ISSUE 3 - OCTOBER 1995

### FEATURES

Low equivalent on resistance  $R_{CE(sat)} = 350\text{m}\Omega$  at 1A

PART MARKING DETAIL - 91A

COMPLEMENTARY TYPE - FMMT491A



### ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$V_{CBO}$	-40	V
Collector-Emitter Voltage	$V_{CEO}$	-40	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Peak Pulse Current	$I_{CM}$	-2	A
Continuous Collector Current	$I_C$	-1	A
Base Current	$I_B$	-200	mA
Power Dissipation at $T_{amb}=25^\circ\text{C}$	$P_{tot}$	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ ).


PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-40		V	$I_C = -100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-40		V	$I_C = -10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5		V	$I_E = -100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}$		-100	nA	$V_{CB} = -30\text{V}$
Emitter Cut-Off Current	$I_{EBO}$		-100	nA	$V_{EB} = -4\text{V}$
Collector-Emitter Cut-Off Current	$I_{CES}$		-100	nA	$V_{CES} = -30\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.2 -0.35 -0.5	V	$I_C = -100\text{mA}, I_B = -1\text{mA}^*$ $I_C = -500\text{mA}, I_B = -20\text{mA}^*$ $I_C = -1\text{A}, I_B = -100\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-1.1	V	$I_C = -1\text{A}, I_B = -50\text{mA}^*$
Base-Emitter Turn-on Voltage	$V_{BE(on)}$		-1.0	V	$I_C = -1\text{A}, V_{CE} = -5\text{V}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	300 300 250 160 30	800		$I_C = -1\text{mA},$ $I_C = -100\text{mA}^*,$ $I_C = -500\text{mA}^*, V_{CE} = -5\text{V}$ $I_C = -1\text{A}^*,$ $I_C = -2\text{A}^*,$
Transition Frequency	$f_T$	150		MHz	$I_C = -50\text{mA}, V_{CE} = -10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	$C_{obo}$		10	pF	$V_{CB} = -10\text{V}, f = 1\text{MHz}$

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$

Spice parameter data is available upon request for this device

# FMMT591A

## TYPICAL CHARACTERISTICS

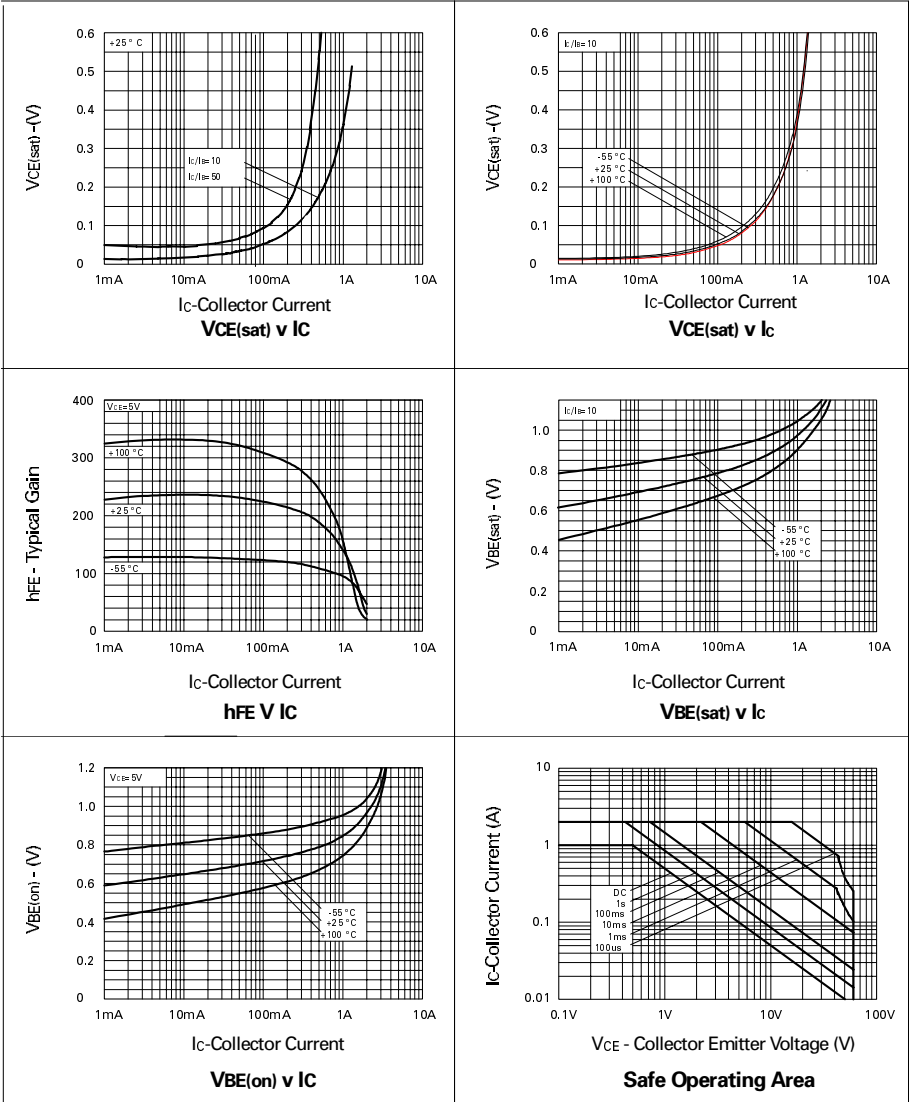



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.