

6KA24

Stand-off Voltage: 24V
Peak Pulse Power: 6000W (10/1000µs)




Features

- Designed for under the hood applications
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Exclusive patented PAR® oxide passivated chip construction
- Low incremental surge resistance
- Ideally suited for automotive “load dump” applications
- High temp. soldering guaranteed: 300°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension
- Available in unidirectional only

Mechanical data

- Case: Molded plastic body over nitride passivated die
- Terminals: Axial leads solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes positive end (cathode)
- Weight: 0.07 oz., 2.1 g
- Mounting Position: Any

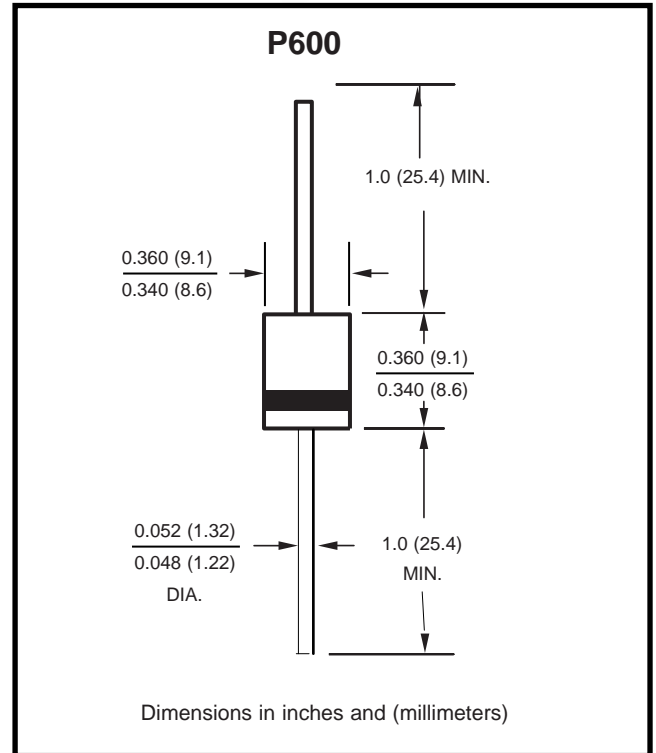

Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Peak pulse power dissipation w/ 10/1000µs waveform ⁽¹⁾	PPPM	6000	W
Peak pulse power dissipation w/ 10µs/50ms waveform ⁽²⁾	PPPM	2000	W
Steady state power dissipation lead lengths 0.375" (9.5mm), T _L = 85°C ⁽⁶⁾	PM(AV)	6.5	W
Maximum working stand-off voltage	V _{WM}	24	V
Peak forward surge current, 8.3ms single half sine-wave ⁽³⁾	I _{FSM}	400	A
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +185	°C

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Maximum DC reverse leakage current at V _{WM} = 24V	T _A = 25°C T _A = 150°C	I _D	1.0 50	µA
Reverse Breakdown Voltage at 100mA	T _A = 25°C min. T _A = 25°C max. T _A = 150°C min. T _A = 150°C max.	V _(BR)	26.7 32.6 29.7 36.7	V
Maximum clamping voltage at I _{PP} = 90A ⁽⁴⁾	T _A = 25°C T _A = 150°C	V _C	40 45	V
Maximum instantaneous forward voltage at 100A ⁽⁵⁾		V _F	1.8	V

Notes: (1) Non-repetitive current pulse, per Fig. 2, with a 10/1000µs waveform
(2) Non-repetitive current pulse, per Fig. 5, with a 10µs/50ms waveform
(3) Measured on 8.3ms half sine-wave, or equivalent square wave, duty cycle = 4 pulses maximum

(4) Measured on 80µs square pulse width
(5) Measured on 300µs second square pulse width
(6) Mounted on copper pad area of 1.6 x 1.6" (40 x 40mm) per Fig. 5

Rating and Characteristic Curves (6KA24) (TA = 25°C unless otherwise noted)

Fig. 1 – Peak Pulse Power Rating Curve

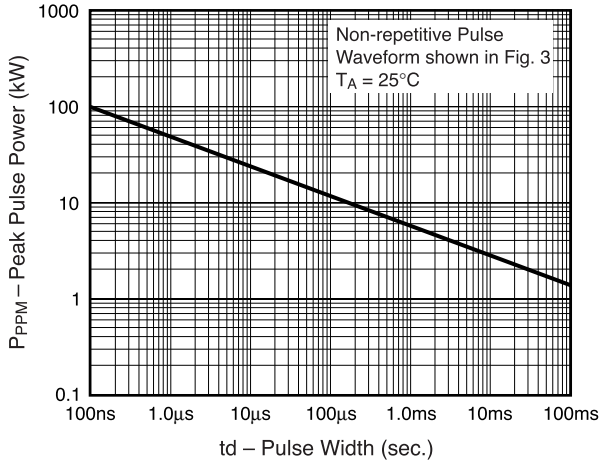


Fig. 2 – 10/1000µs Pulse Waveform

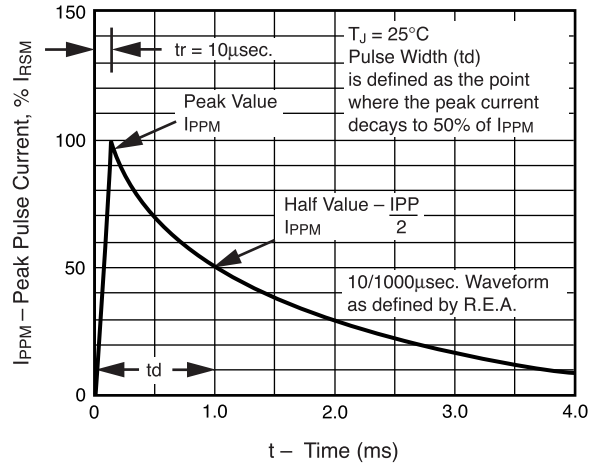


Fig. 3 – Pulse Derating Curve

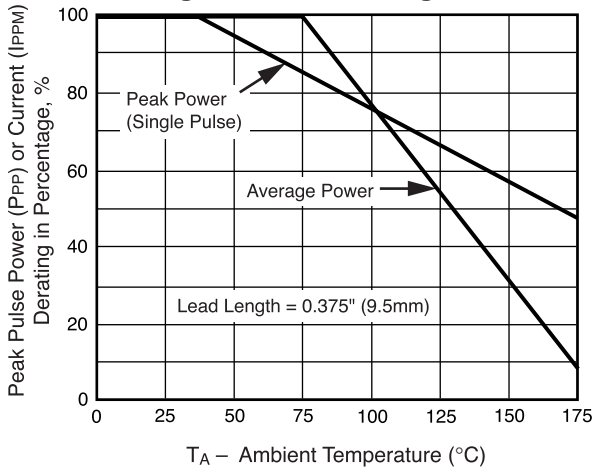


Fig. 4 – Maximum Non-Repetitive Peak Forward Surge Current


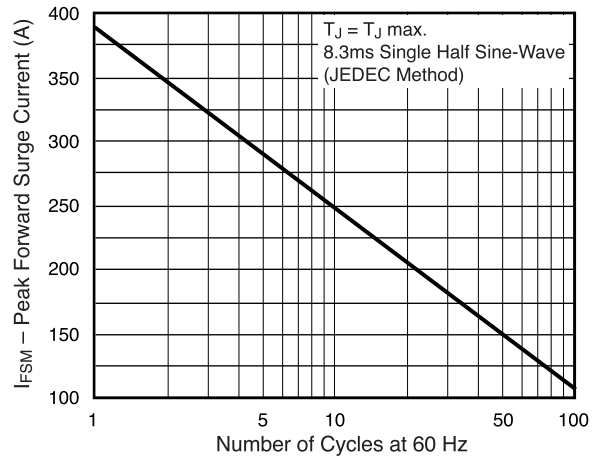


Fig. 5 – 10µs/50ms Pulse Waveform



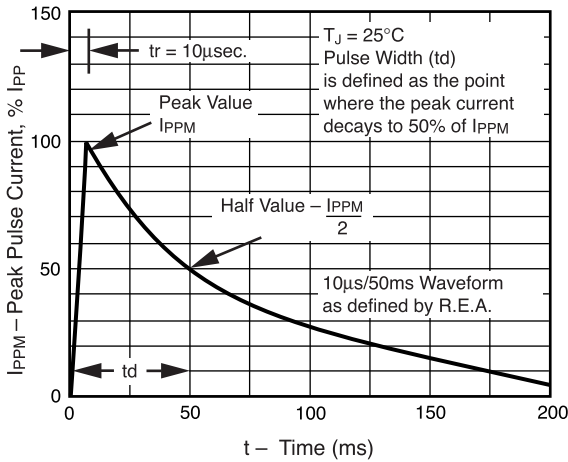

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.