

# 2SK2903-01MR

FUJI POWER MOS-FET


## N-CHANNEL SILICON POWER MOS-FET

### ■ Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

### ■ Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

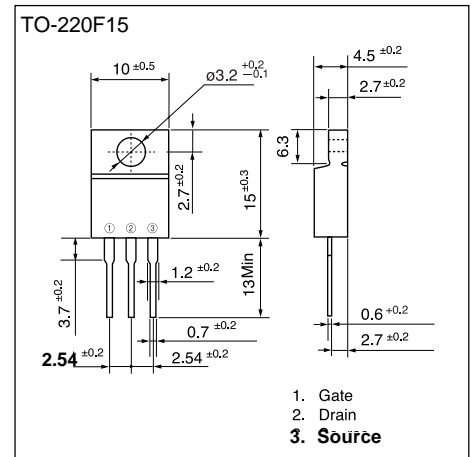


### ■ Maximum ratings and characteristic Absolute maximum ratings

● (T<sub>c</sub>=25°C unless otherwise specified)

Item	Symbol	Rating	Unit
Drain-source voltage	V <sub>DS</sub>	60	V
Continuous drain current	I <sub>D</sub>	±50	A
Pulsed drain current	I <sub>D(puls)</sub>	±200	A
Gate-source voltage	V <sub>GS</sub>	±30	V
Maximum Avalanche Energy	E <sub>AV</sub> *1	720.8	mJ
Max. power dissipation	P <sub>D</sub>	50	W
Operating and storage temperature range	T <sub>ch</sub> T <sub>stg</sub>	+150 -55 to +150	°C

\*1 L=0.384mH, V<sub>cc</sub>=24V

### ■ Equivalent circuit schematic

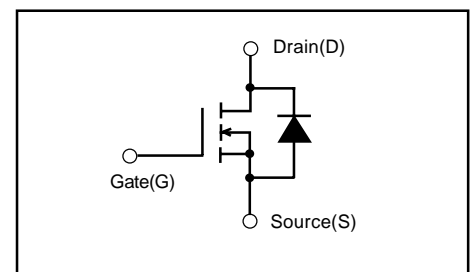







### ● Electrical characteristics (T<sub>c</sub> = 25°C unless otherwise specified)







Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	BV <sub>DSS</sub>	I <sub>D</sub> =1mA V <sub>GS</sub> =0V	60			V
Gate threshold voltage	V <sub>GS(th)</sub>	I <sub>D</sub> =10mA V <sub>DS</sub> =V <sub>GS</sub>	2.5	3.0	3.5	V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> =60V V <sub>GS</sub> =0V	T <sub>ch</sub> =25°C	10	500	μA
			T <sub>ch</sub> =125°C	0.2	1.0	mA
Gate-source leakage current	I <sub>GSS</sub>	V <sub>GS</sub> =±30V V <sub>DS</sub> =0V		10	100	nA
Drain-source on-state resistance	R <sub>DS(on)</sub>	I <sub>D</sub> =40A V <sub>GS</sub> =10V		9.5	12	mΩ
Forward transconductance	g <sub>fs</sub>	I <sub>D</sub> =40A V <sub>DS</sub> =25V	20	40		S
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> =25V		3100	4650	pF
Output capacitance	C <sub>oss</sub>	V <sub>GS</sub> =0V		1300	1950	pF
Reverse transfer capacitance	C <sub>rss</sub>	f=1MHz		350	530	pF
Turn-on time t <sub>on</sub>	t <sub>d(on)</sub>	V <sub>CC</sub> =30V I <sub>D</sub> =80A V <sub>GS</sub> =10V		20	30	ns
			t <sub>r</sub>		85	
	t <sub>d(off)</sub>	R <sub>GS</sub> =10Ω		88	130	
Turn-off time t <sub>off</sub>	t <sub>f</sub>			65	120	
Avalanche capability	I <sub>AV</sub>	L=100μH T <sub>ch</sub> =25°C	50			A
Diode forward on-voltage	V <sub>SD</sub>	I <sub>F</sub> =50A V <sub>GS</sub> =0V T <sub>ch</sub> =25°C		1.0	1.5	V
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =50A V <sub>GS</sub> =0V		70		ns
Reverse recovery charge	Q <sub>rr</sub>	-di/dt=100A/μs T <sub>ch</sub> =25°C		0.13		μC




### ● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R <sub>th(ch-c)</sub>	channel to case			2.5	°C/W
	R <sub>th(ch-a)</sub>	channel to ambient			62.5	°C/W

Characteristics

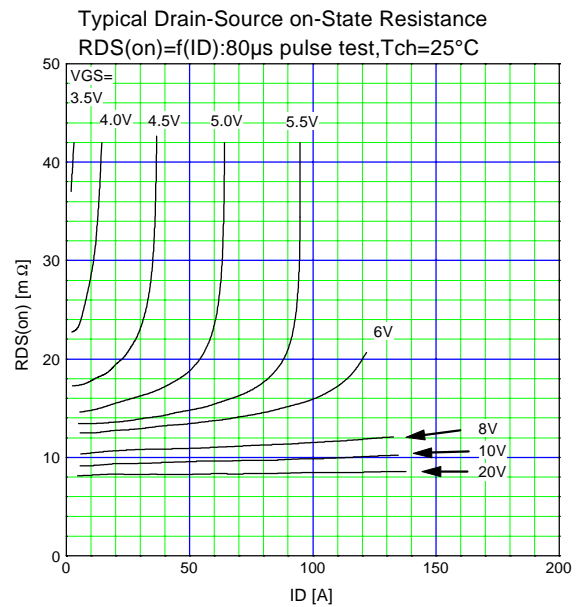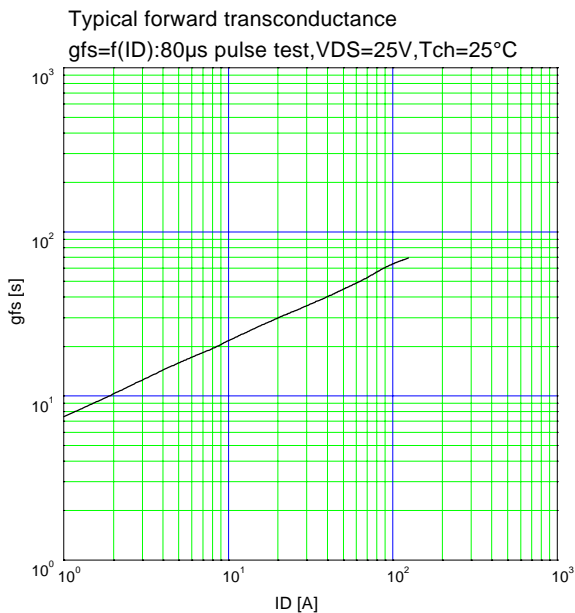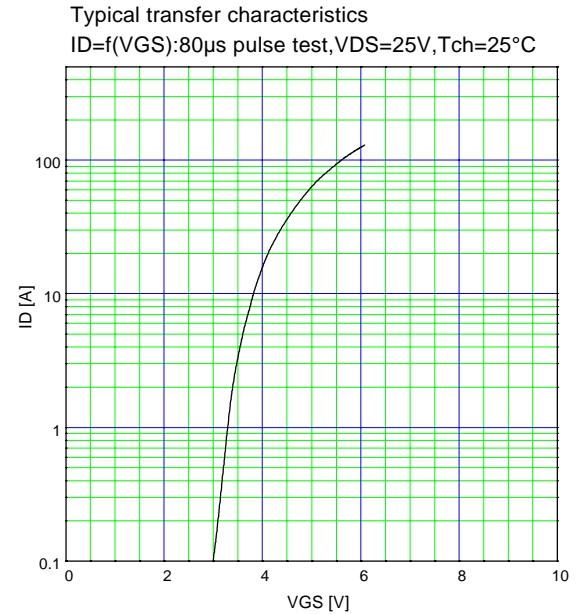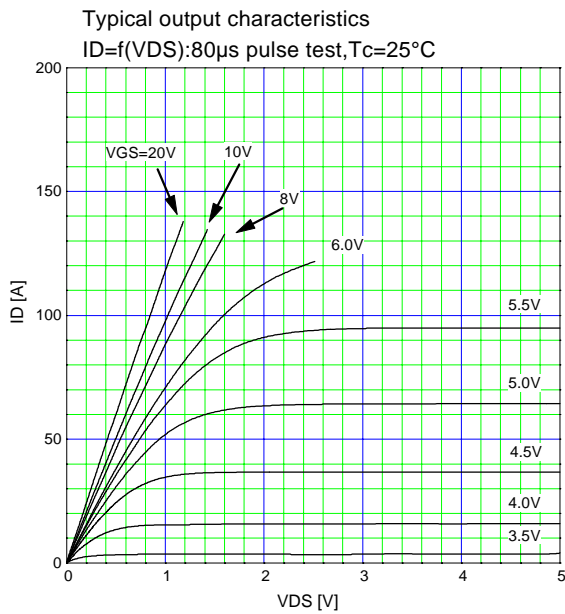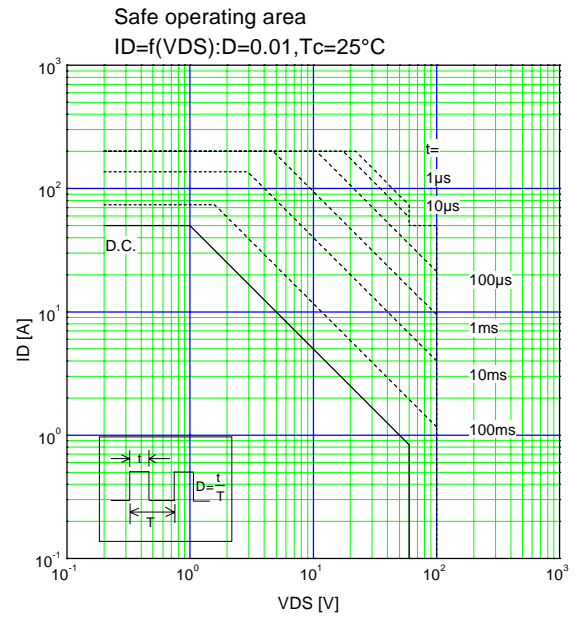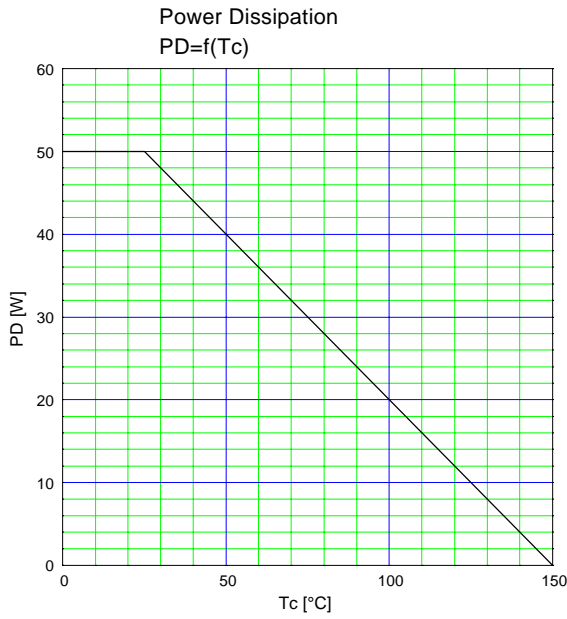

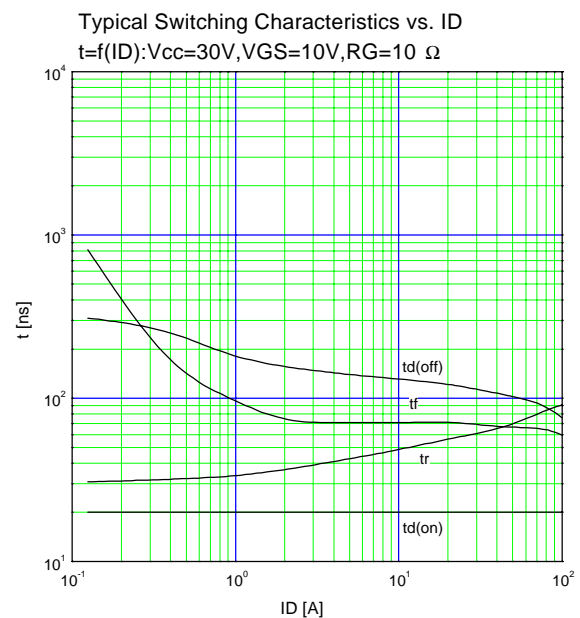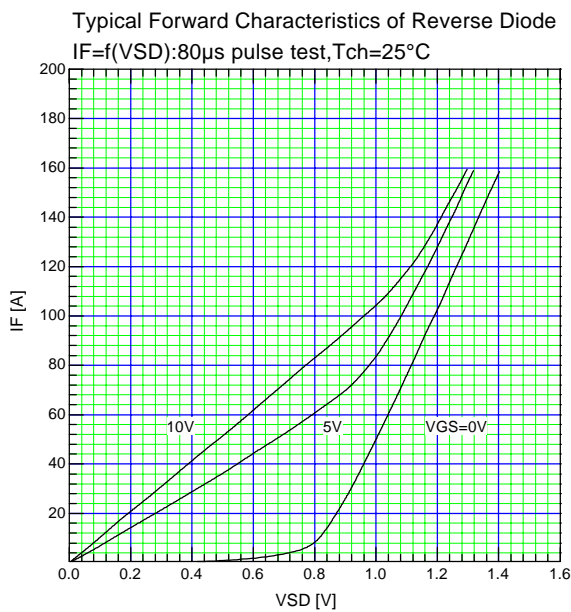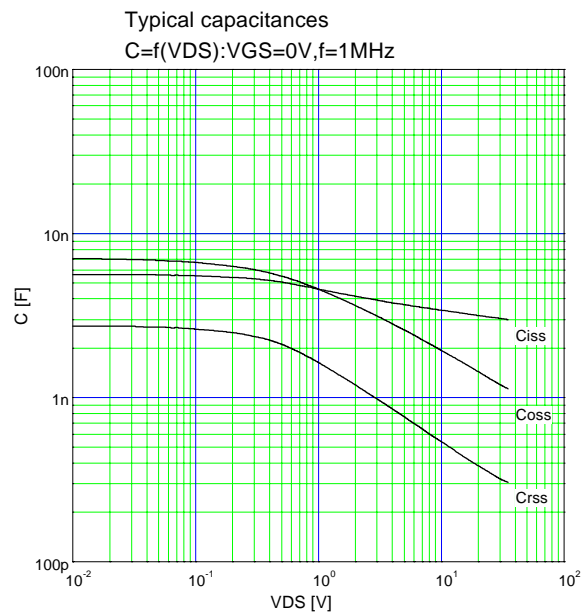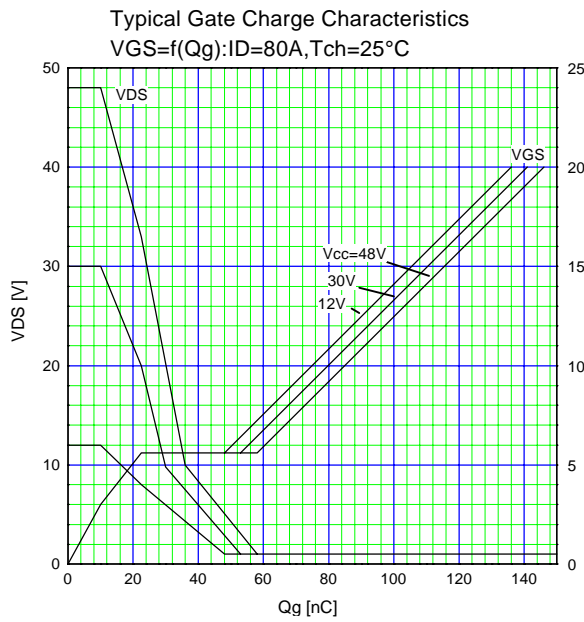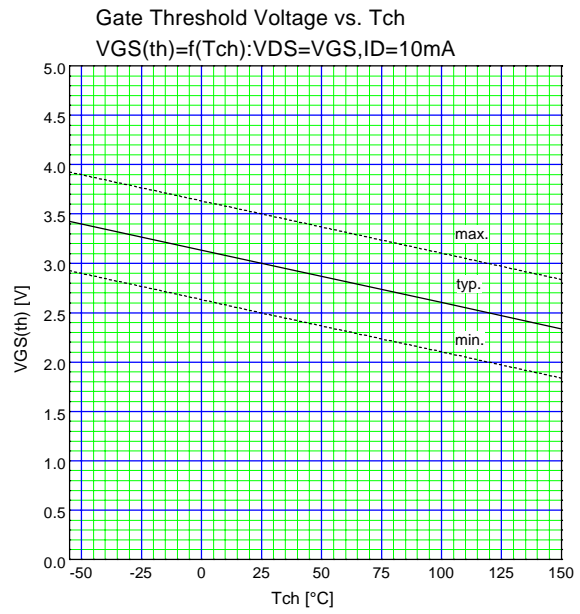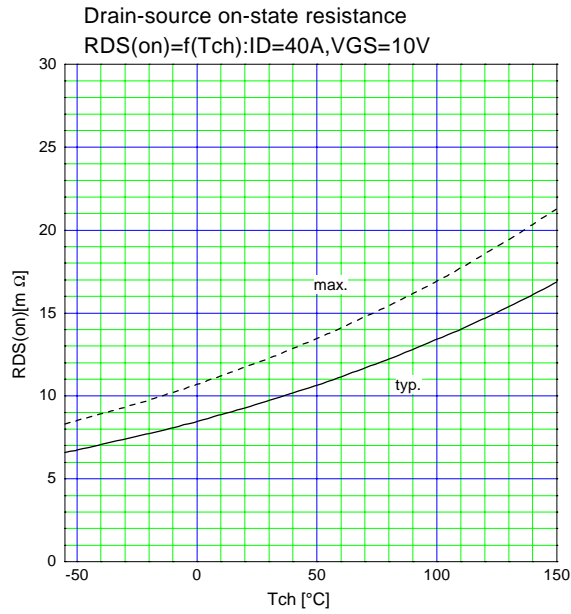

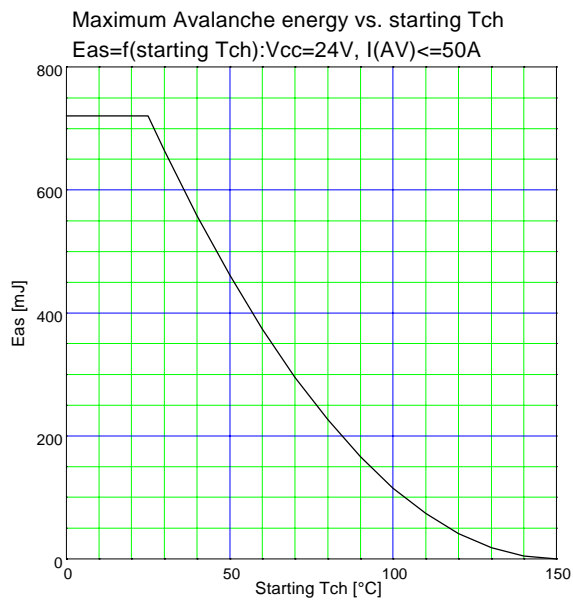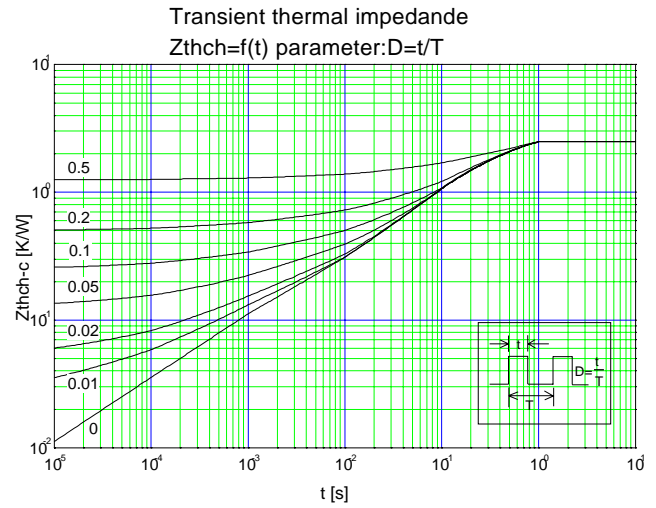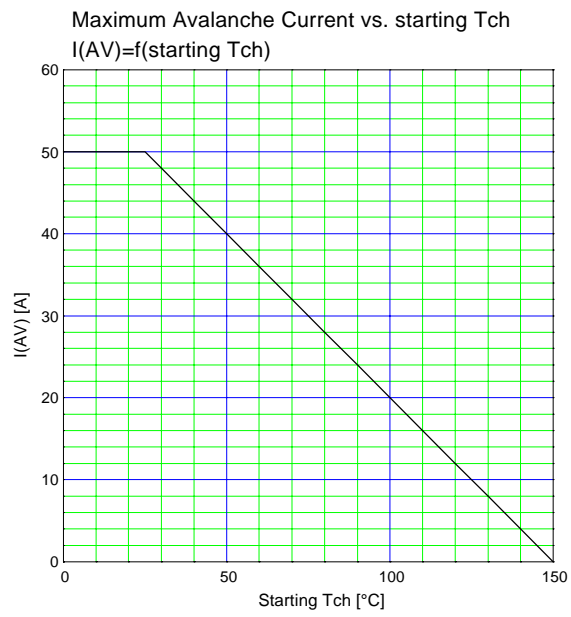

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.