


**PURE GREEN HLMP-D600 TINTED**  
**PURE GREEN HLMP-D640 CLEAR**  
**SOFT ORANGE HLMP-D400 TINTED**  
**SOFT ORANGE HLMP-D401 TINTED**

**PACKAGE DIMENSIONS**

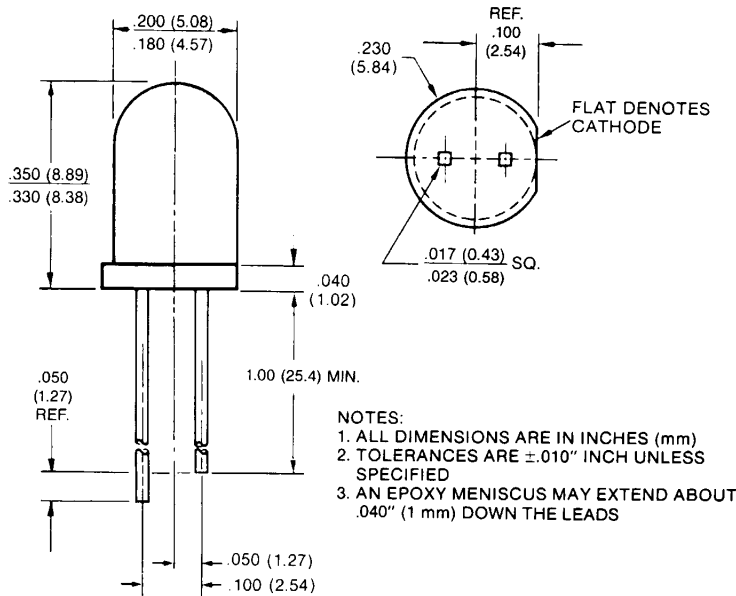

**DESCRIPTION**

These T-1 $\frac{3}{4}$  LEDs are widely used as general purpose indicators. The pure green lamps are made with a GaP LEDs on a GaP substrate. The soft orange are made with GaAsP LEDs on a GaP substrate. They are encapsulated in epoxy packages and are designed to provide superior light output and a wide viewing angle.

**FEATURES**

- Popular T-1 $\frac{3}{4}$  package
- Low drive current
- Solid state reliability
- Wide viewing angle
- Choice of pure green or soft orange colors

C1062F

**ABSOLUTE MAXIMUM RATING** ( $T_A = 25^\circ\text{C}$  Unless Otherwise Specified)


DC forward current ( $I_f$ )	40 mA
Operating temperature range	$-40^\circ\text{C}$ to $+85^\circ\text{C}$
Storage temperature range	$-40^\circ\text{C}$ to $+100^\circ\text{C}$
Lead soldering time (at $\frac{1}{16}$ inch from the bottom of lamp)	5 seconds @ $260^\circ\text{C}$
Peak forward current ( $I_p$ ) (at $f=1.0$ KHz, Duty factor= 1/10)	200 mA
Power dissipation ( $P_d$ )	110 mW
Recommended operating current ( $I_f$ , Rec)	20 mA






## T-1 $\frac{3}{4}$ (5 mm) SOLID STATE LAMPS

<b>ELECTRO-OPTICAL CHARACTERISTICS</b> ( $T_A = 25^\circ\text{C}$ Unless Otherwise Specified)					
PART NUMBER HLMP-	D600	D640*	D400	D401	TEST CONDITIONS
Luminous intensity (mcd)					$I_F = 10 \text{ mA}$
minimum	1.0	6.7	2.1	4.0	
typical	3.0	60	3.5	7.0	
Forward voltage ( $V_F$ )					$I_F = 10 \text{ mA}$
minimum			1.5	1.5	
typical	2.1	2.2	1.9	1.9	
maximum	2.7	3.0	2.4	2.4	
Peak wavelength (nm)	560	560	612	612	$I_F = 10 \text{ mA}$
Spectral line half width (nm)	24	24	40	40	$I_F = 10 \text{ mA}$
Reverse breakdown voltage ( $V_R$ )	5	5	5	5	$I_F = 100 \mu\text{A}$
Viewing angle ( $^\circ$ )	60	24	60	60	$I_F = 10 \text{ mA}$

\*NOTE: HLMP-D640 test condition is  $I_F = 20 \text{ mA}$

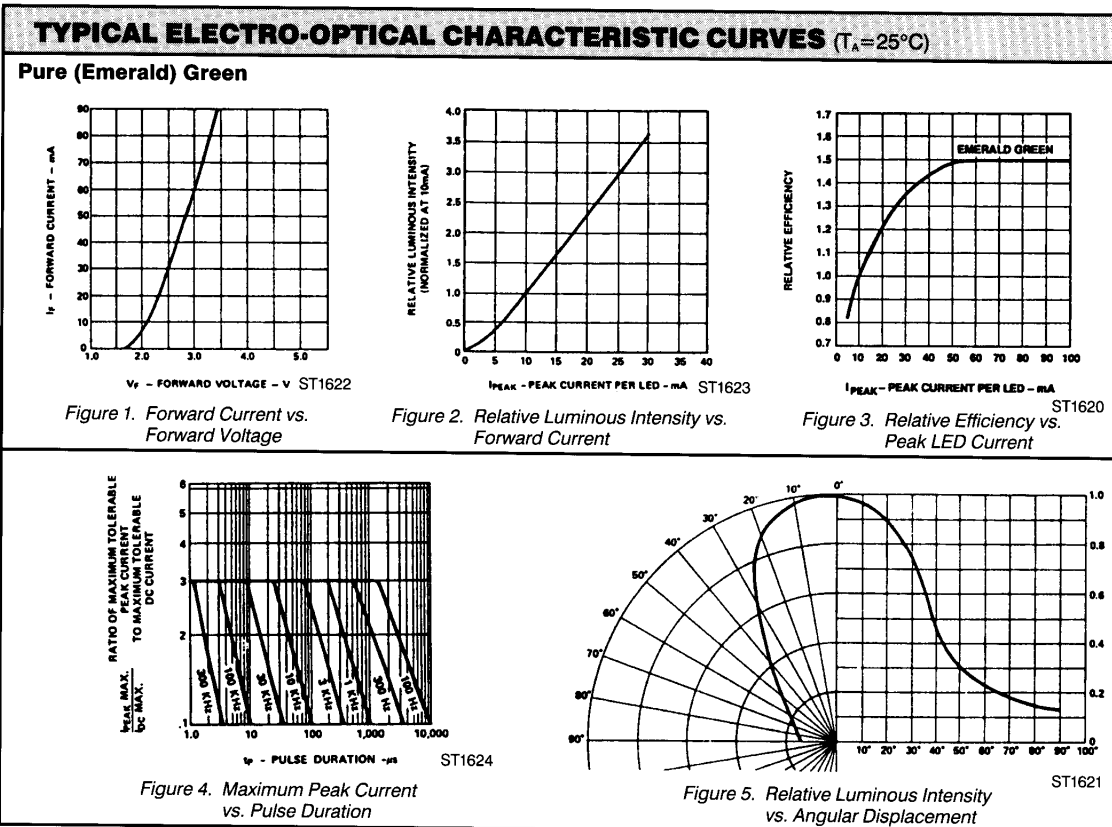

**TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES ( $T_A=25^\circ\text{C}$ )**

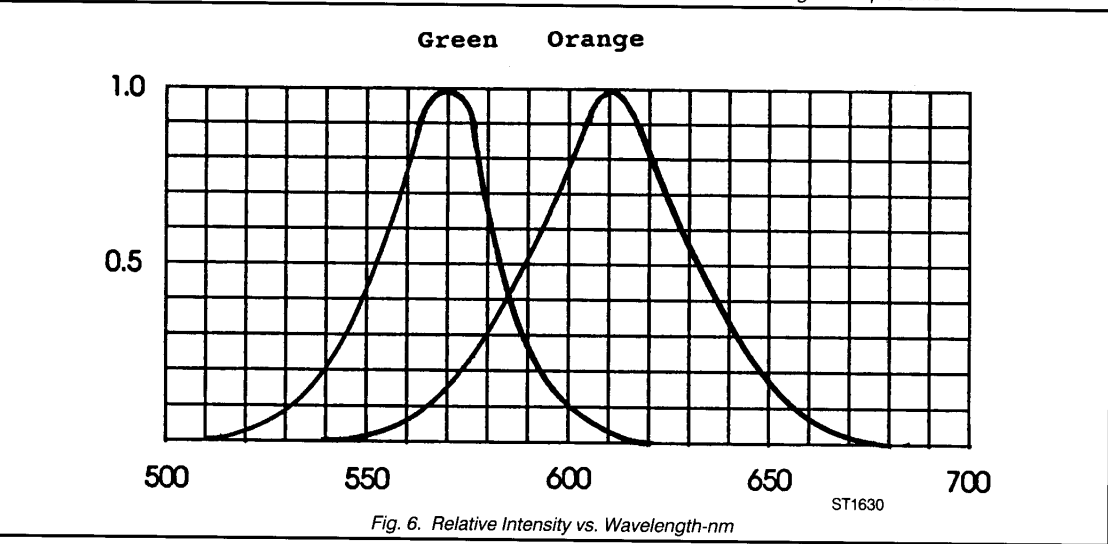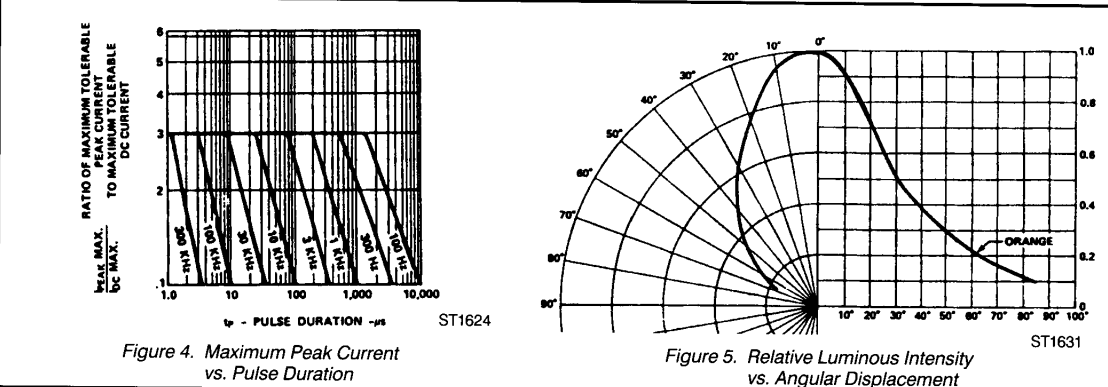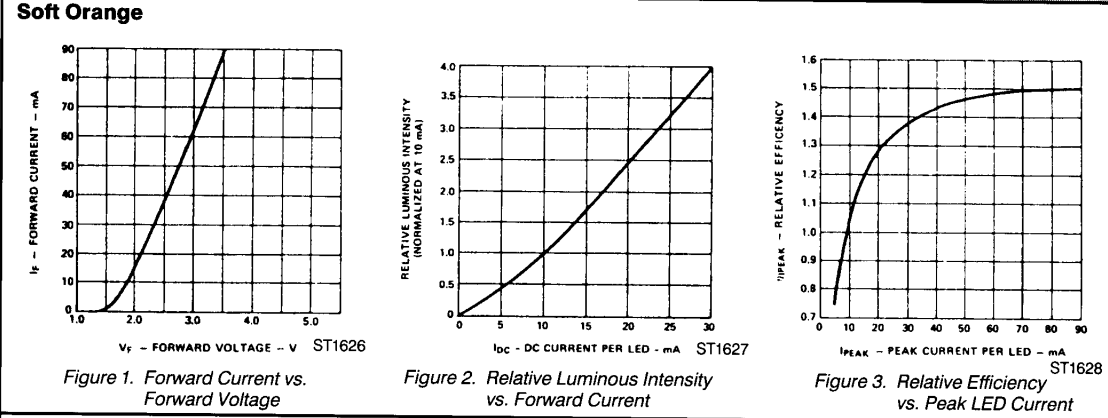



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.