



1N746 THRU 1N759 AND 1N4370 THRU 1N4372

500mW SILICON ZENER DIODES



FEATURES

- * Zener voltage 2.4V to 12.0V
- * Metallurgically bonded device types


MECHANICAL CHARACTERISTICS

- * CASE: Hermetically sealed glass case. DO - 35.
- * FINISH: All external surfaces are corrosion resistant and leads solderable.
- * THERMAL RESISTANCE: 200°C/W (Typical) junction to lead at 0.375 - inches from body. Metallurgically bonded DO - 35, exhibit less than 100°C/W at zero distance from body.
- * POLARITY: banded end is cathode.
- * WEIGHT: 0.2 grams
- * MOUNTING POSITIONS: Any

MAXIMUM RATINGS

Junction and Storage temperatures: - 65°C to + 175°C
 DC Power Dissipation: 500mW
 Power Derating: 4.0mW/°C above 50°C
 Forward Voltage @ 200mA: 1.5 Volts

VOLTAGE RANGE
2.4 to 12.0 Volts

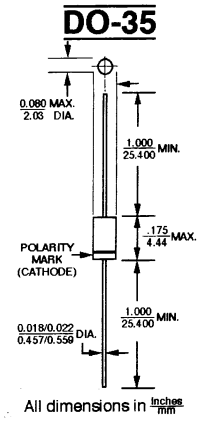

ELECTRICAL CHARACTERISTICS @ 25°C

JEDEC TYPE NO. (Note 1)	NOMINAL ZENER VOLTAGE $V_Z @ I_{ZT}$ (Note 2)	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE $Z_{ZT} @ I_{ZT}$ (Note 3)	MAXIMUM REVERSE CURRENT @ $V_R = 1$ VOLT		MAXIMUM ZENER CURRENT I_{ZM} (Note 4)	TYPICAL TEMP COEFF. OF ZENER VOLTAGE α_{VZ}
				@ 25°C	@ +150°C		
	VOLTS	mA	OHMS	μA	μA	mA	%/°C
1N4370	2.4	20	30	100	200	150	-0.065
1N4371	2.7	20	30	75	150	135	-0.060
1N4372	3.0	20	29	50	100	120	-0.075

1N746	3.3	20	28	10	30	110	-0.066
1N747	3.6	20	24	10	30	100	-0.068
1N748	3.9	20	23	10	30	95	-0.046
1N749	4.3	20	22	2	30	85	-0.033
1N750	4.7	20	19	2	30	75	-0.015
1N751	5.1	20	17	1	20	70	± 0.010
1N752	5.6	20	11	1	20	65	+0.030
1N753	6.2	20	7	1	20	60	+0.049
1N754	6.8	20	5	1	20	55	+0.063
1N755	7.5	20	6	1	20	50	+0.067
1N756	8.2	20	8	1	20	45	+0.060
1N757	9.1	20	10	1	20	40	+0.061
1N758	10.0	20	17	1	20	35	+0.062
1N759	12.0	20	30	1	20	30	+0.062

NOTE 1

Standard tolerance on JEDEC types shown is $\pm 10\%$. Suffix letter A denotes $\pm 5\%$ tolerance; suffix letter C denotes $\pm 2\%$; and suffix letter D denotes $\pm 1\%$ tolerance.

NOTE 2

Voltage measurements to be performed 20 sec. after application of D. C. test current.

NOTE 3

Zener impedance derived by superimposing on I_{ZT} , a 60 cps, rms ac current equal to 10% I_{ZT} (2mA ac).

NOTE 4

Allowance has been made for the increase in V_Z due to Z_Z and for the increase in junction temperature as the unit approaches thermal equilibrium at the power dissipation of 400 mW.

* JEDEC Registered Data

RATINGS AND CHARACTERISTIC CURVES (1N746 THRU 1N759A AND 1N4370 THRU 1N4372A)

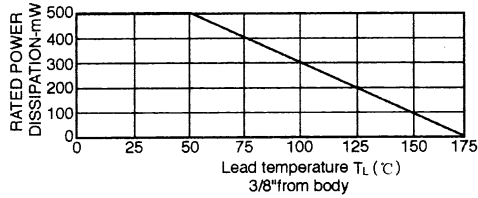


FIGURE 1
POWER DERATING CURVE

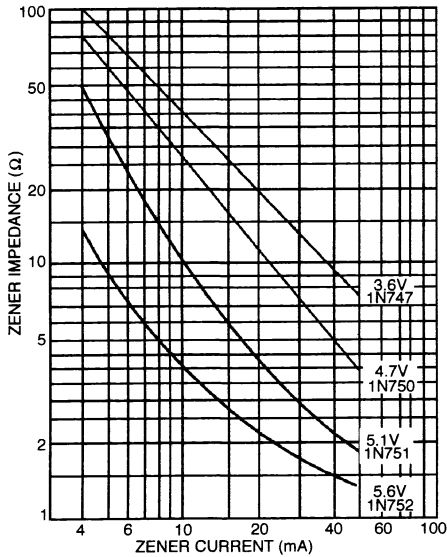


FIGURE 2
ZENER IMPEDANCE VS ZENER CURRENT
(TYPICAL)

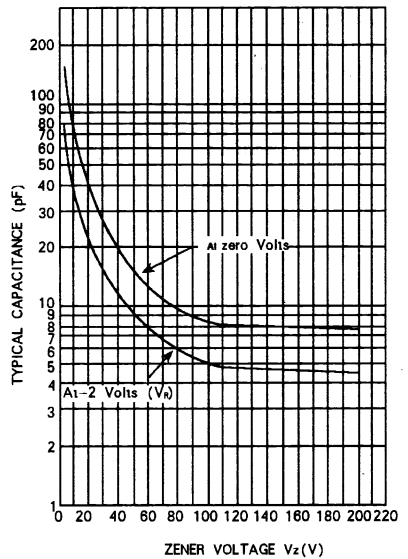


FIGURE 3
CAPACITANCE VS. ZENER VOLTAGE
(TYPICAL)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.