





## Schottky Barrier Rectifiers

**DO-214AC  
(SMA)**


**Reverse Voltage 25 to 45 V**  
**Forward Current 1.5 A**

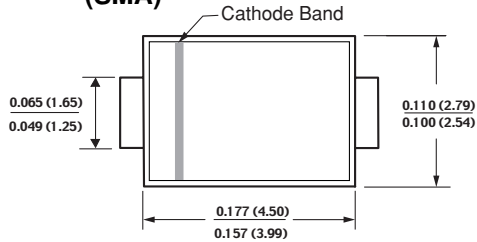

Dimensions in inches  
and (millimeters)

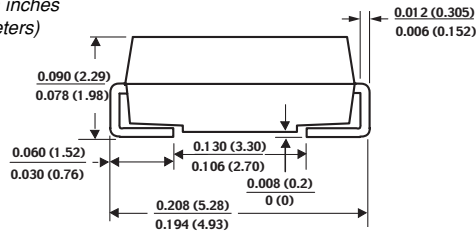

### Mounting Pad Layout

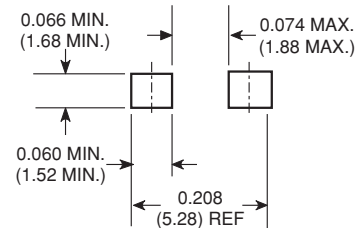

### Mechanical Data

**Case:** JEDEC DO-214AC molded plastic body

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**High temperature soldering guaranteed:**  
250°C/10 seconds at terminals

**Polarity:** Color band denotes cathode end

**Weight:** 0.002oz., 0.064g

### Features

- Low power loss, high efficiency
- Low profile surface mount package
- Built-in strain relief
- Very low switching losses
- Low reverse current
- High surge capability
- Guardring for overvoltage protection
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

### Maximum Ratings and Thermal Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Parameter	Symbol	BYS10-25	BYS10-35	BYS10-45	Unit
Device marking code		BYS 025	BYS 035	BYS 045	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	25	35	45	V
Maximum average forward rectified current	I <sub>F(AV)</sub>	1.5			A
Peak forward surge current single half sine-wave superimposed on rated load at 8.3ms at 10ms	I <sub>FSM</sub>	40 30			A
Maximum Thermal Resistance – Junction Lead	R <sub>θJL</sub>	25			°C/W
Maximum Thermal Resistance – Junction Ambient	R <sub>θJA</sub>	150 <sup>(1)</sup> 125 <sup>(2)</sup> 100 <sup>(3)</sup>			°C/W
Junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150			°C


### Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Maximum instantaneous forward voltage at 1A <sup>(4)</sup>	V <sub>F</sub>	500			mV
Maximum DC reverse current at V <sub>RRM</sub> <sup>(4)</sup>	I <sub>R</sub>	500 10			μA mA


- Notes:** (1) Mounted on epoxy-glass hard tissue  
 (2) Mounted on epoxy-glass hard tissue, 50 mm<sup>2</sup> 35 μm Cu  
 (3) Mounted on Al-oxide-ceramic (Al<sub>2</sub>O<sub>3</sub>), 50 mm<sup>2</sup> 35 μm Cu  
 (4) Pulse test: 300μs pulse width, 1% duty cycle

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Max. Reverse Power Dissipation vs. Junction Temperature**

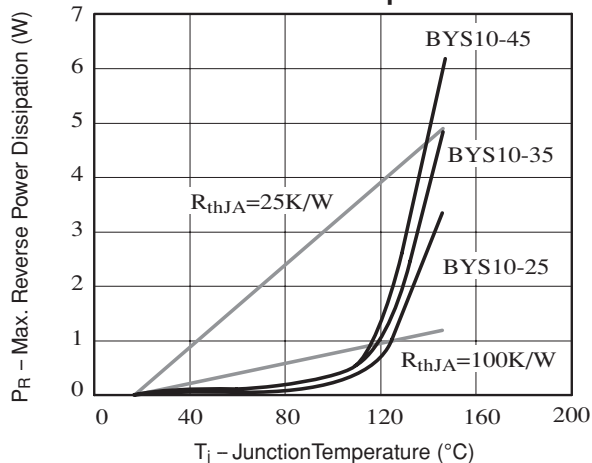


**Fig. 2 – Max. Reverse Current vs. Junction Temperature**

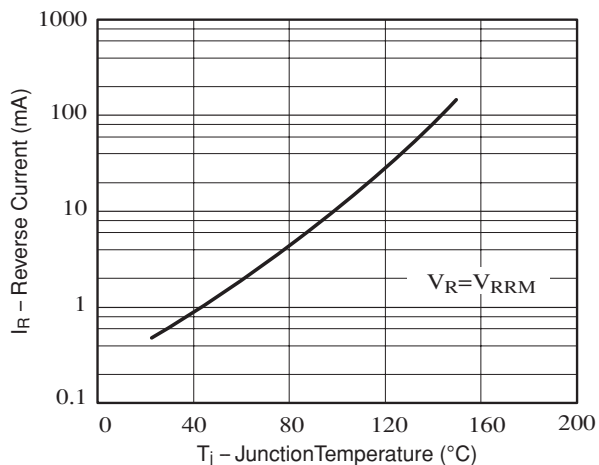


**Fig. 3 – Max. Average Forward Current vs. Ambient Temperature**

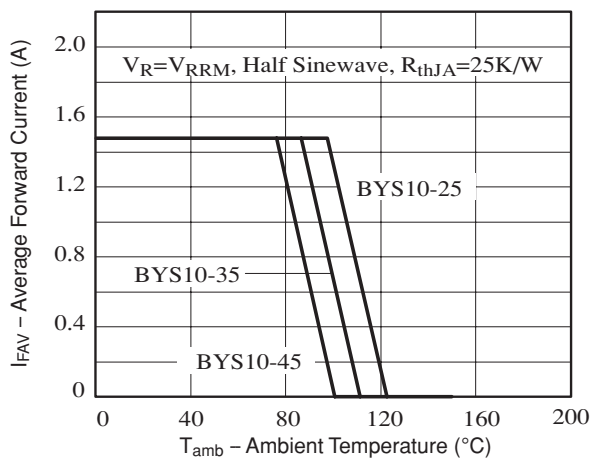


**Fig. 4 – Max. Average Forward Current vs. Ambient Temperature**

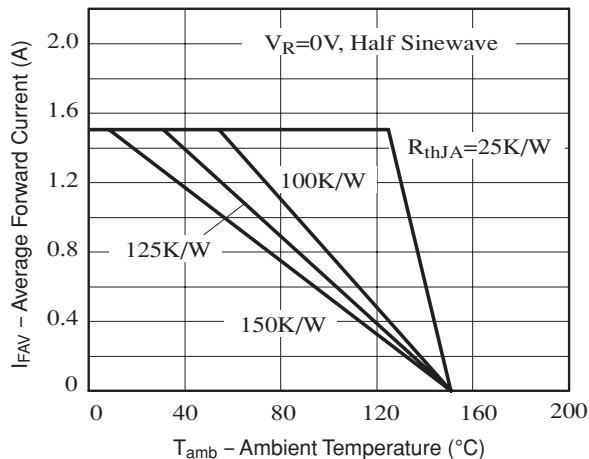

**Fig. 5 – Max. Forward Current vs. Forward Voltage**

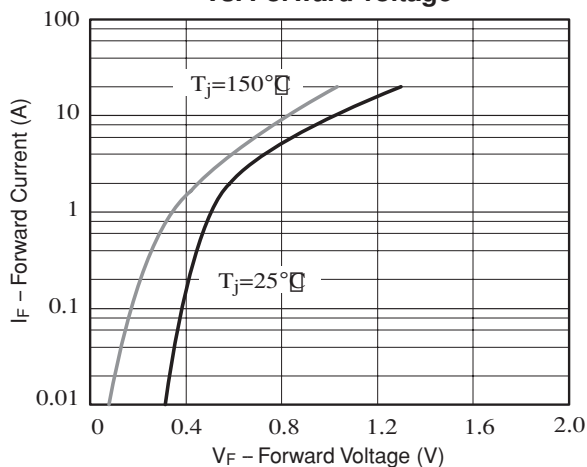

**Fig. 6 – Diode Capacitance vs. Reverse Voltage**

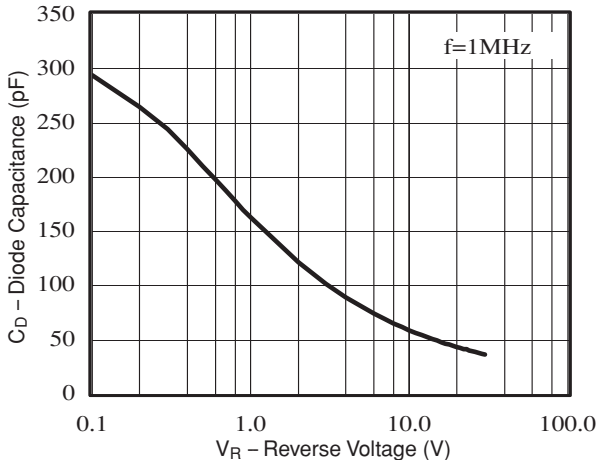



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.