


Features

- High Current Capability
- Low Forward Voltage Drop
- Guard Ring for Transient Protection
- Glass Package for High Reliability
- Packaged for Surface Mount Applications

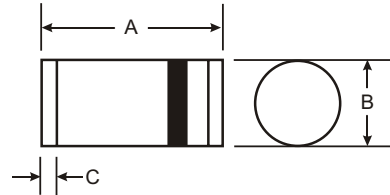

Mechanical Data

- Case: MELF, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Cathode band
- Approx Weight: 0.25 gram
- Mounting Position: Any

MELF		
Dim	Min	Max
A	4.80	5.20
B	2.40	2.60
C	0.55 Nominal	
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	1N5817M	1N5818M	1N5819M	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	20	30	40	V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	V
Maximum Average Forward Rectified Current @ T _T = 90°C (Note 1)	I _O	1.0			A
Maximum Forward Surge Current. Half Cycle @60Hz Superimposed on rated load, JEDEC Method	I _{FSM}	25			A
Maximum Forward Voltage Drop @ I _F = 1.0A @ I _F = 3.0A	V _F	0.450 0.750	0.550 0.875	0.600 0.900	V
Maximum Reverse Leakage Current @ V _{RRM} @ T _A = 25°C @ T _A = 100°C	I _R	1.0 10			mA
Typical Thermal Resistance, Junction to Ambient (Note 1)	R _{θJA}	130			K/W
Typical Junction Capacitance (Note 2)	C _j	110			pF
Storage and Operating Temperature Range	T _j , T _{STG}	-60 to +125			°C

- Notes: 1. Valid provided that terminals are kept at ambient temperature.
2. Measured at V_R = 4.0V, f = 1.0MHz.

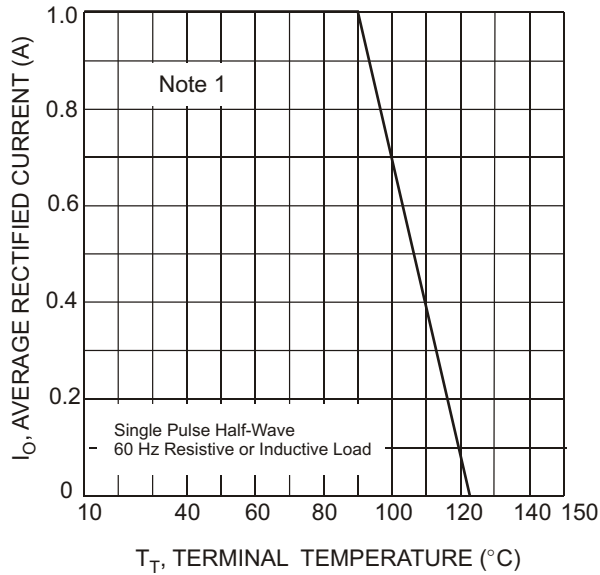


Fig. 1, Forward Current Derating Curve

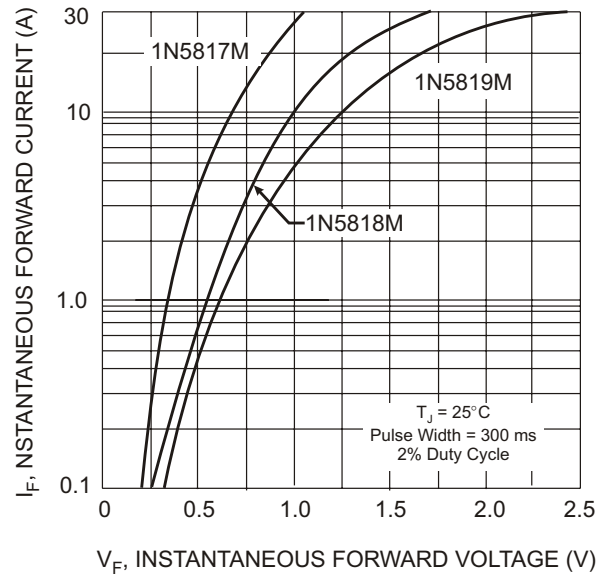


Fig. 2, Typical Forward Characteristics

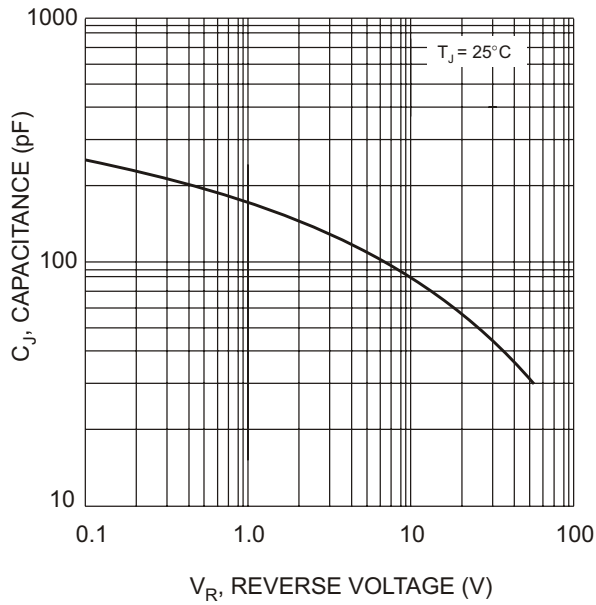


Fig. 3, Typical Junction Capacitance

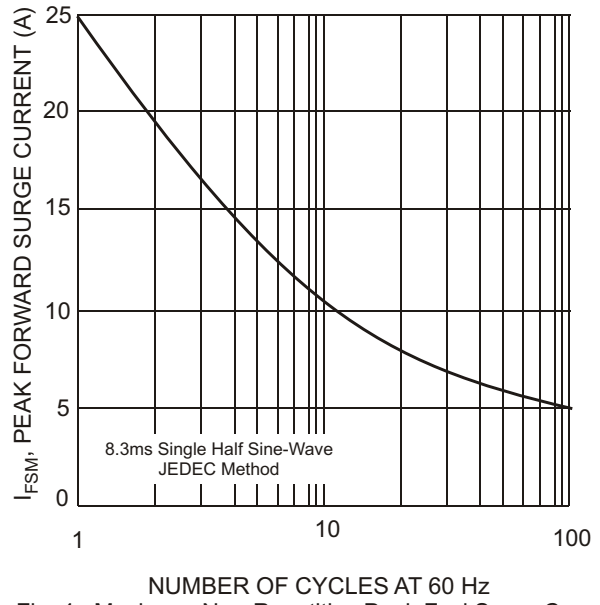


Fig. 4, Maximum Non-Repetitive Peak Fwd Surge Current



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.