

Microsemi Corp.

The diode experts



**1N5063 - 1N5117
MZ806 - MZ890,
MZ 210 - MZ 240**

SANTA ANA, CA

For more information call:
(714) 979-8220

FEATURES

- Microminiature package.
- Voidless hermetically sealed glass package.
- Triple layer passivation.
- Metallurgically bonded.
- High performance characteristics.
- Stable operation at temperatures to 200°C.
- Very low thermal impedance.


MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C.
Storage Temperature: -65°C to +200°C.

ELECTRICAL CHARACTERISTICS

TYPE (Note 1)		ELECTRICAL SPECIFICATIONS AT 25°C										MAXIMUM RATINGS	
JEDEC Registration	±10% Tolerance	NOMINAL ZENER VOLTAGE V _Z @ I _{ZT}	TEST CURRENT I _{ZT}	MAXIMUM REVERSE LEAKAGE CURRENT			MAX. ZENER IMPEDANCE Z _Z @ I _{ZT}	TYP. TEMP. COEFFICIENT T _C @ I _{ZT}	MAXIMUM CONTINUOUS CURRENT I _{ZM}	MAXIMUM SURGE CURRENT I _{SM}			
				I _R @ V _R	±5% V _R	±10% V _R					%/°C	mA	Amps
1N5063	MZ806	6.8	75	500	5.2	4.9	2	.04	440	10.0			
1N5064	MZ807	7.5	75	300	5.7	5.4	2	.04	400	8.0			
1N5065	MZ808	8.2	75	200	6.2	5.9	3	.05	360	7.0			
1N5066	MZ809	9.1	75	100	6.9	6.6	3	.05	330	6.0			
1N5067	MZ810	10.0	75	40	7.6	7.2	4	.06	300	5.0			
1N4883	MZ812	12	65	10	9.1	8.6	5	.07	250	4.0			
1N5069	MZ813	13	50	10	9.9	9.3	6	.07	230	4.0			
1N5070	MZ814	14	50	10	10.6	10.1	6	.07	210	4.0			
1N5071	MZ815	15	50	10	11.4	10.8	6	.07	200	3.0			
1N5072	MZ816	16	50	5	12.2	11.5	7	.07	185	3.0			
1N5073	MZ818	18	40	5	13.7	12.9	8	.08	170	2.0			
1N4884	MZ820	20	40	5	15.2	14.4	9	.08	150	2.0			
1N5074	MZ822	22	30	5	16.7	15.8	10	.08	135	2.0			
1N5075	MZ824	24	30	5	18.2	17.3	10	.08	125	1.5			
1N5076	MZ827	27	25	1	20.6	19.4	12	.09	110	1.5			
1N5077	MZ830	30	25	1	22.8	21.6	15	.090	100	1.5			
1N5078	MZ833	33	20	1	25.1	23.7	21	.090	90	1.2			
1N5079	MZ836	36	20	1	27.4	25.9	21	.090	85	1.0			
1N5081	MZ840	40	20	1	30.4	28.8	27	.095	75	1.0			
1N5083	MZ845	45	15	1	34.2	32.4	37	.095	65	0.8			
1N5085	MZ850	50	15	1	38.0	36.0	50	.095	60	0.8			
1N5087	MZ856	56	10	1	42.6	40.3	70	.095	55	0.7			
1N5088	MZ860	60	10	1	45.7	43.2	70	.095	50	0.6			
1N5091	MZ870	70	10	1	53.3	50.5	90	.095	45	0.6			
1N5092	MZ875	75	10	1	56.0	54.0	100	.095	40	0.5			
1N5093	MZ880	80	10	1	60.8	57.7	115	.095	35	0.4			
1N4096	MZ890	90	8.0	1	68.5	64.8	150	.095	30	0.4			
1N4097	MZ210	100	5.0	1	76.0	72.0	175	.100	30	0.4			
1N5096	MZ211	110	5.0	1	83.6	79.2	250	.100	25	0.3			
1N5097	MZ212	120	5.0	1	91.2	86.4	325	.100	25	0.2			
1N5098	MZ213	130	5.0	1	98.8	93.6	375	.100	20	0.20			
1N5099	MZ214	140	5.0	1	106	101	550	.100	20	0.20			
*1N4098	MZ215	150	5.0	1	114	108	650	.100	20	0.20			
1N5100	MZ216	160	4.0	1	122	115	700	.100	20	0.15			
1N5101	MZ217	170	4.0	1	129	122	750	.100	18	0.15			
1N5102	MZ218	180	4.0	1	137	129	850	.100	18	0.10			
1N5103	MZ219	190	4.0	1	144	137	900	.100	15	0.10			
1N5104	MZ220	200	4.0	1	152	144	950	.100	15	0.10			
1N5105	MZ222	220	3.0	1	167	158	1100	.100	15	0.09			
1N5106	MZ224	240	3.0	1	182	173	1300	.105	12	0.09			
1N5107	MZ226	260	3.0	1	198	187	1500	.105	12	0.08			
1N5109	MZ228	280	3.0	1	213	202	1700	.105	10	0.08			
1N5110	MZ230	300	3.0	1	228	216	1900	.105	10	0.07			
1N5111	MZ232	320	2.0	1	243	230	2100	.105	9	0.07			
1N5113	MZ234	340	2.0	1	258	245	2400	.110	9	0.06			
1N5114	MZ236	360	2.0	1	274	259	2700	.110	8	0.06			
1N5115	MZ238	380	2.0	1	289	274	3000	.110	8	0.06			
1N5117	MZ240	400	2.0	1	304	288	3500	.110	7	0.06			

**3-WATT
GLASS ZENER DIODES**

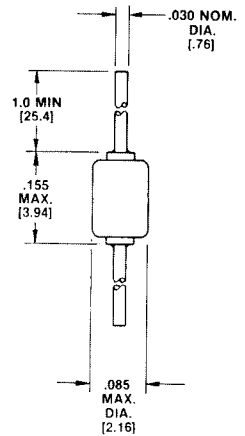

**FIGURE 1
PACKAGE A**

MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case.

LEAD MATERIAL: Tinned copper.

MARKING: Body painted, alpha numeric with JEDEC number.

POLARITY: Cathode band.

NOTE 1: JEDEC registration applies to ± 5% tolerance zeners only.
Specify 5% voltage tolerance by changing first numeral of type number from 8 to 7.
(MZ806 becomes 706) or from 2 to 1 (MZ211 becomes MZ111).

1N5063 - 1N5117, MZ806 - MZ890, MZ 210 - MZ 240

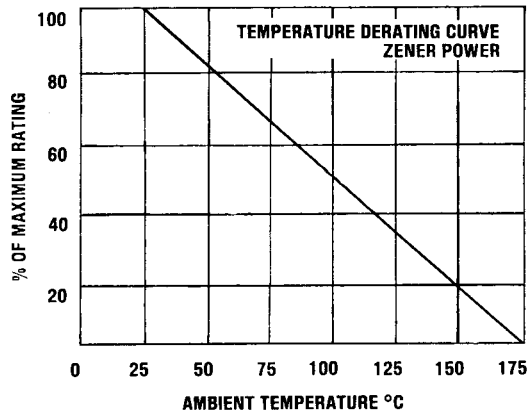


FIGURE 2

EXPLANATION OF ZENER CHARACTERISTICS

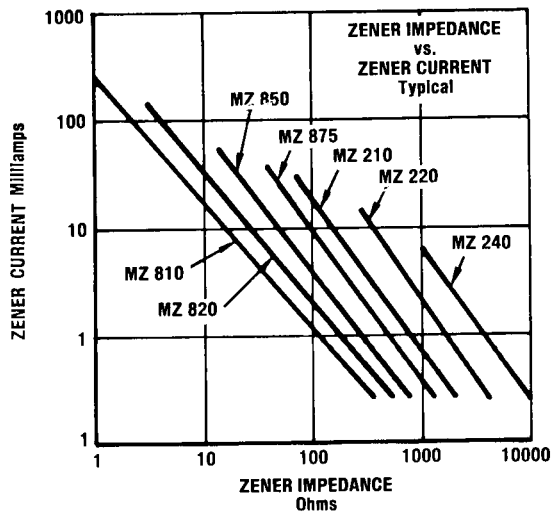


FIGURE 3

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.