

POWER SCHOTTKY RECTIFIERS

50 Amp, 30 and 40 Volts

1N6097
1N6098

2

FEATURES

- Very Low Forward Voltage
- Low Recovered Charge
- Rugged Package Design (DO-5)
- Low Thermal Resistance
- High Surge Current
- Reverse Energy Tested (2A pk)

DESCRIPTION

Microsemi's series of Schottky barrier power rectifiers is ideally suited for output rectifiers and catch diodes in low voltage power supplies. The Microsemi high conductivity design, using a heavy copper top post and 4 point crimp, ensures cool thermal operation and low dynamic impedance. Rugged design absorbs stress that can damage glass-to-metal seal during installation and use.

ABSOLUTE MAXIMUM RATINGS

	1N6097	1N6098
Working Peak Reverse Voltage, V_{RWM}	30V	40V
DC Blocking Voltage, V_R	30V	40V
Repetitive Peak Reverse Voltage, V_{RRM}	30V	40V
Non-repetitive Peak Reverse Voltage, V_{RSM}	36V	48V
Average Rectified Forward Current, I_O	50A ($T_C = 70^\circ C$) 20A ($T_C = 105^\circ C$)	
Non-repetitive Peak Surge Current (8.3 mS), I_{FSM}	800A	
Storage Temperature Range, T_{stg}	-65 to +125°C	
Peak Operating Junction Temperature, $T_{j(pk)}$	+150°C	
Thermal Resistance Junction to Case, $R_{\theta JC}$	1°C/WMax.	

ELECTRICAL CHARACTERISTICS ($T_{CASE} = 25^\circ C$)

Characteristic	Symbol	Both Types	Units	Conditions
Maximum Instantaneous Reverse Current	I_{RRM}	250	mA	$V_{RWM} = \text{Rated}$, $T_C = 125^\circ C$ Pulse Width = 300 μ s, Duty Cycle \leq 2 percent
Maximum Reverse Current	I_R	250	mA	$V_R = \text{Rated}$, $T_C = 115^\circ C$
Maximum Instantaneous Forward Voltage	V_{FM}	0.86	V	$I_O = 50A^*$ $T_C = 70^\circ C$
	V_{FM}	0.60	V	$I_F = 10A$ Pulse Width 300 μ s Duty Cycle \leq 2 percent
Capacitance	C_i	7000	pF	$V_R = 1.0V$

* $I_{FM} = 157A$

MECHANICAL SPECIFICATIONS

1N6097, 1N6098

	ins.	mm
A	.225 ± .005	5.72 ± 0.13
B	.060 MIN.	1.52 MIN.
C	.156 ± .020	3.96 ± 0.51
D	.156 MIN. FLAT	3.96 MIN. FLAT
E	.667 DIA. MAX	16.94 DIA. MAX.
F	.090 MAX.	2.29 MAX.
G	.677 ± .010	17.20 ± 0.25
H	.375 MAX.	9.53 MAX.
J	.140 MIN. DIA.	3.56 MIN. DIA.
K	1.000 MAX.	25.40 MAX.
L	.450 MAX.	11.43 MAX.
M	.438 ± .015	11.13 ± 0.38
N	.078 MAX.	1.98 MAX.


DO-5

Notes:


1. Cathode is stud.
2. Maximum unlubricated stud torque: 30 inch pounds.
3. Angular orientation of terminal is undefined.
4. Maximum tension (90°) anode terminal 15 pounds for 30 seconds.

Microsemi Corp.
Watertown
The diode experts

Typical Forward Current vs Forward Voltage

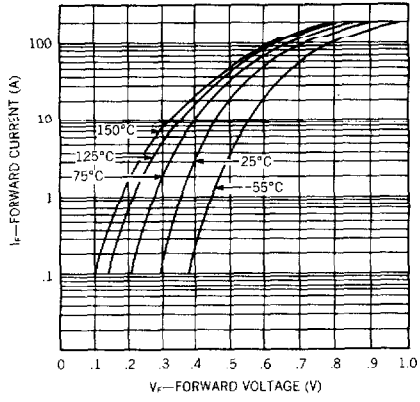

Typical Reverse Current vs Reverse Voltage

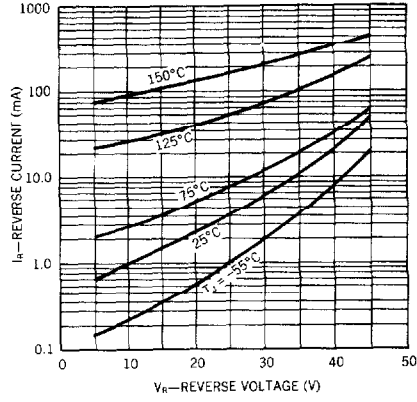



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.