


# 80 Amp Schottky OR'ing Rectifier FST8515

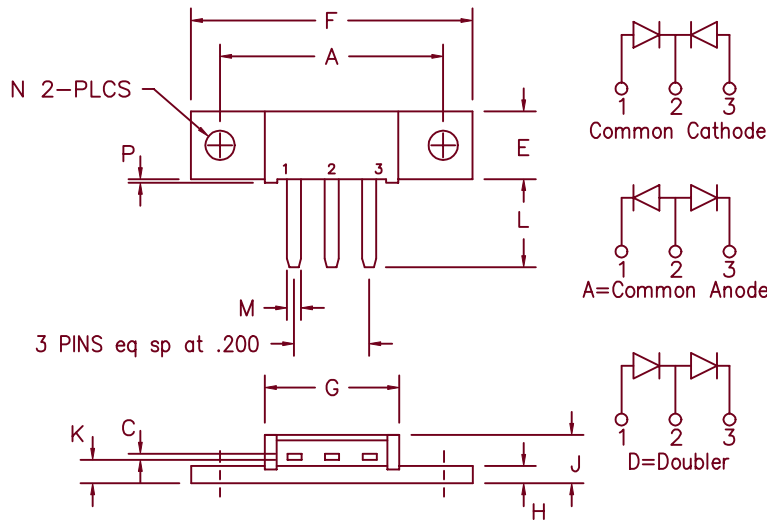

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.180	1.195	29.97	30.35	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Dia.
P	.015	.025	0.38	0.64	

Note: Baseplate Common with Pin 2

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST8515*	85CNQ015	15V	15V

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- 0.28V Vf@40A per leg, 100°C
- Optimized for OR'ing applications
- Guard ring reverse protection
- 125°C Operation (Vr<5V)

## Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 80 Amps	T <sub>C</sub> = 84°C, V <sub>R</sub> = 5V
Average forward current per pkg	I <sub>F(AV)</sub> 80 Amps	T <sub>C</sub> = 78°C, V <sub>R</sub> = 15V
Average forward current per leg	I <sub>F(AV)</sub> 40 Amps	T <sub>C</sub> = 84°C, V <sub>R</sub> = 5V
Average forward current per leg	I <sub>F(AV)</sub> 40 Amps	T <sub>C</sub> = 78°C, V <sub>R</sub> = 15V
Maximum surge current per leg	I <sub>FSM</sub> 800 Amps	8.3 ms, half sine, T <sub>J</sub> = 100°C
Max repetitive peak reverse current	I <sub>R(OV)</sub> 2 Amps	f = 1 KHZ, 25°C, 1 μsec square wave
Max peak forward voltage per leg	V <sub>FM</sub> 0.35 Volts	I <sub>FM</sub> = 40A: T <sub>J</sub> = 25°C*
Max peak forward voltage per leg	V <sub>FM</sub> 0.28 Volts	I <sub>FM</sub> = 40A: T <sub>J</sub> = 100°C*
Max peak reverse current per leg	I <sub>RM</sub> 750 mA	V <sub>R</sub> = 5V, T <sub>J</sub> = 100°C*
Max peak reverse current per leg	I <sub>RM</sub> 1500 mA	V <sub>R</sub> = 15V, T <sub>J</sub> = 100°C*
Max peak reverse current per leg	I <sub>RM</sub> 12 mA	V <sub>R</sub> = 5V, T <sub>J</sub> = 25°C
Max peak reverse current per leg	I <sub>RM</sub> 20 mA	V <sub>R</sub> = 15V, T <sub>J</sub> = 25°C
Typical junction capacitance per leg	C <sub>J</sub> 5600 pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 150°C
Operating junction temp range	T <sub>J</sub>	-55°C to 125°C
Max thermal resistance per leg	R <sub>θJC</sub>	1.0°C/W Junction to case
Max thermal resistance per pkg	R <sub>θJC</sub>	0.5°C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.3°C/W Case to sink
Mounting Base Torque		10 inch pounds maximum
Weight		0.3 ounce (8.4 grams) typical

# FST8515

Figure 1  
Typical Forward Characteristics – Per Leg

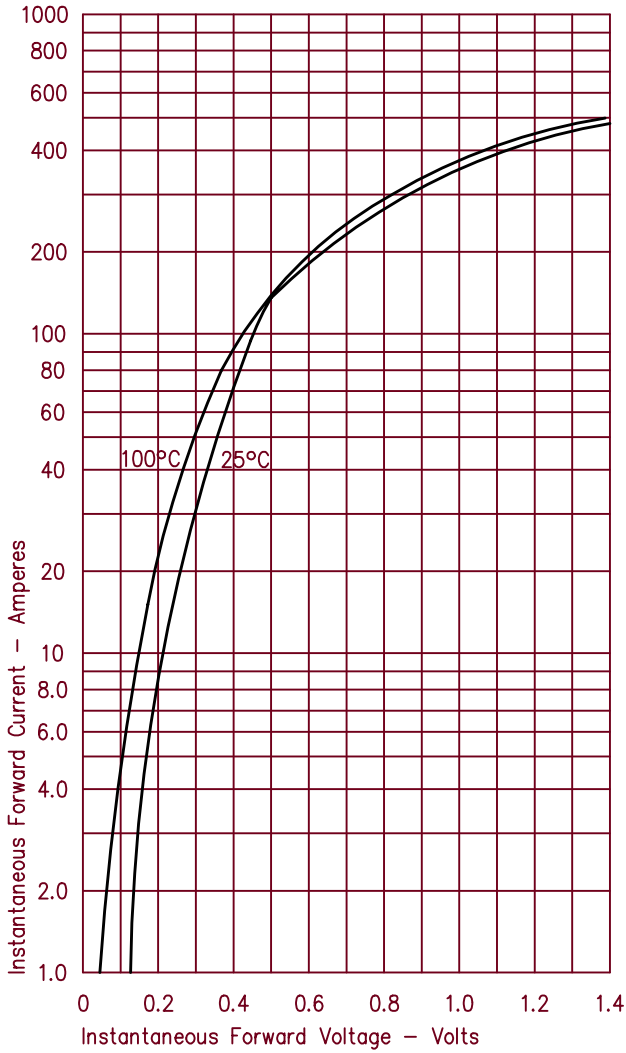


Figure 3  
Typical Junction Capacitance – Per Leg

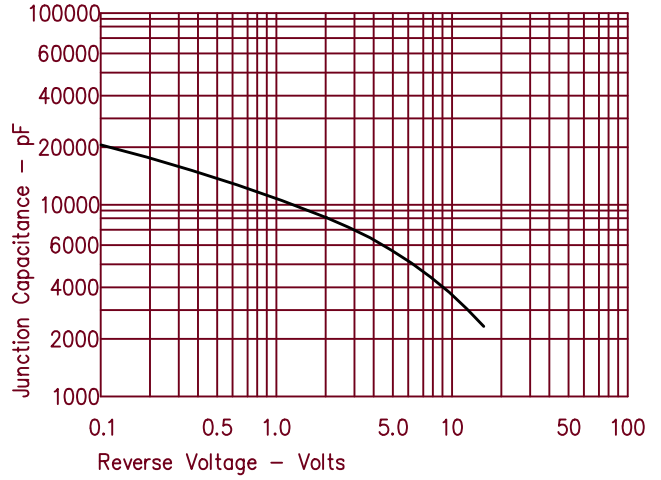


Figure 4  
Forward Current Derating – Per Leg

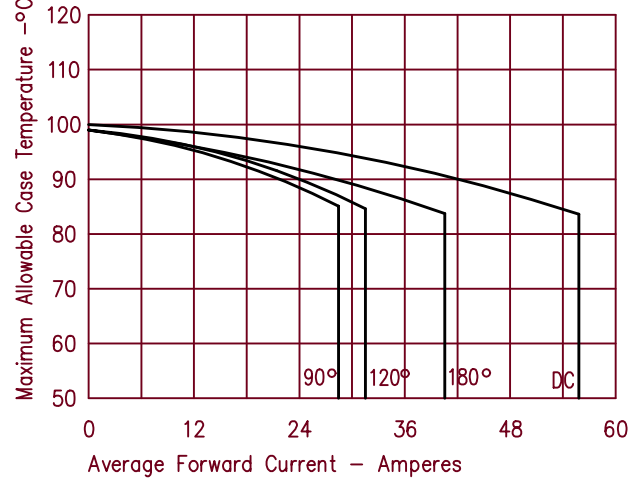


Figure 2  
Typical Reverse Characteristics – Per Leg


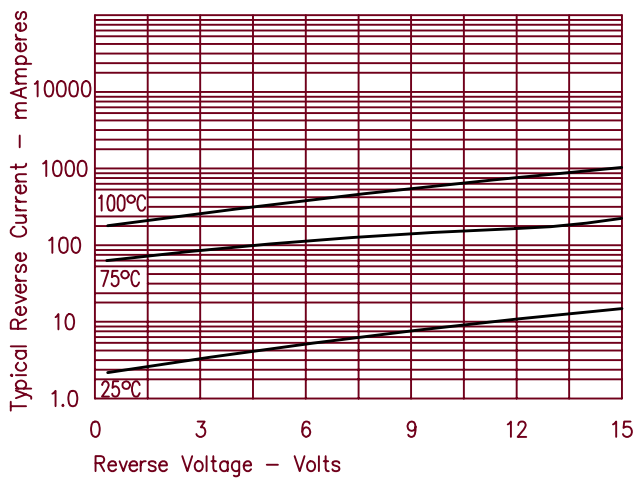


Figure 5  
Maximum Forward Power Dissipation – Per Leg



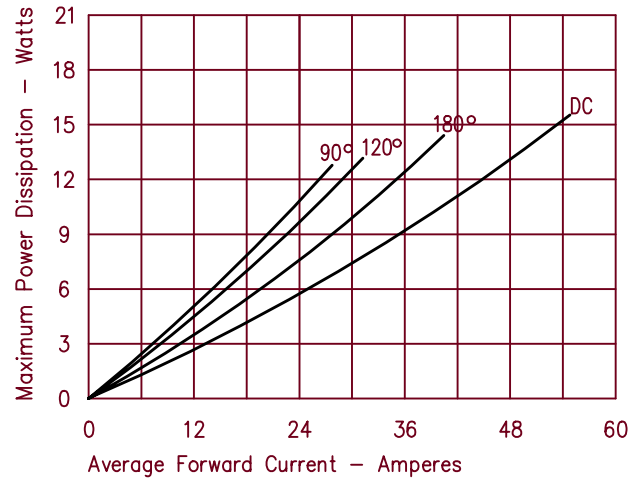

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.