DF005S - DF10S

1.0A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

Features

- Glass Passivated Die Construction
- Diffused Junction
- Low Forward Voltage Drop, High Current Capability
- Surge Overload Rating to 50A Peak
- Designed for Surface Mount Application
- Plastic Material - UL Flammability Classification 94V-0
- UL Listed Under Recognized Component Index, File Number E94661

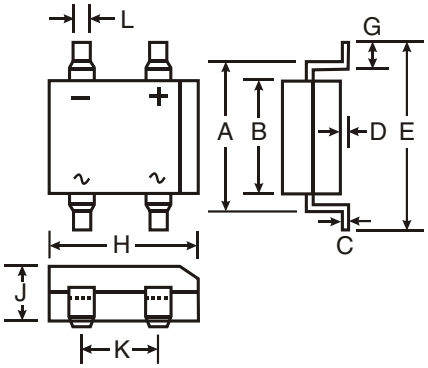

DF-S		
Dim	**Min**	**Max**
A	7.40	7.90
B	6.20	6.50
C	0.22	0.30
D	0.076	0.33
E	—	10.40
G	1.02	1.53
H	8.13	8.51
J	2.40	2.60
K	5.00	5.20
L	1.00	1.20
All Dimensions in mm		

Mechanical Data

- Case: Molded Plastic
- Terminals: Solder Plated Leads, Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 3
- Polarity: As marked on Case
- Approx. Weight: 0.38 grams
- Mounting Position: Any
- Marking: Type Number

Maximum Ratings and Electrical Characteristics

@ T_A = 25°C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	DF 005S	DF 01S	DF 02S	DF 04S	DF 06S	DF 08S	DF 10S	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RMM} V_{RWM} V_R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Average Forward Rectified Current @ T_A = 40°C	I_O	1.0							A
Non-Repetitive Peak Forward Surge Current, 8.3 ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50							A
Forward Voltage (per element) @ I_F = 1.0A	V_{FM}	1.1							V
Peak Reverse Current at Rated DC Blocking Voltage (per element) @ T_A = 25°C @ T_A = 125°C	I_{RM}	10 500							μA
I^2t Rating for Fusing (t<8.3ms)	I^2t	10.4							A^2s
Typical Total Capacitance (per element) (Note 1)	C_T	25							pF
Typical Thermal Resistance, Junction to Ambient (Note 2)	$R_{\theta JA}$	40							°C/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150							°C

Notes: 1. Measured at 1.0 MHz and Applied Reverse Voltage of 4.0V DC.
2. Thermal resistance, junction to ambient, measured on PC board with 5.0mm^2 (0.03mm thick) land areas.

© Diodes Incorporated

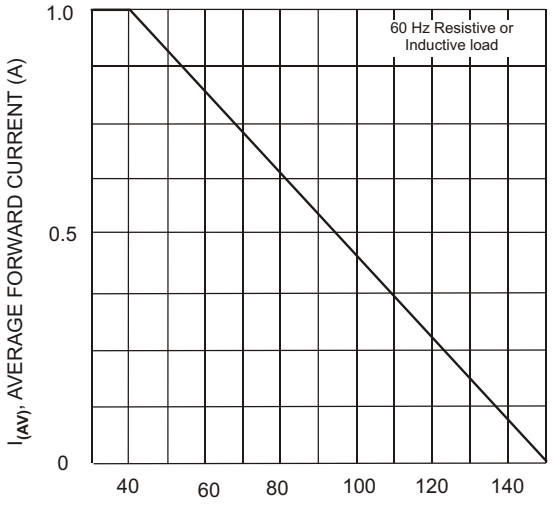

T_A, AMBIENT TEMPERATURE (°C)
Fig. 1 Output Current Derating Curve

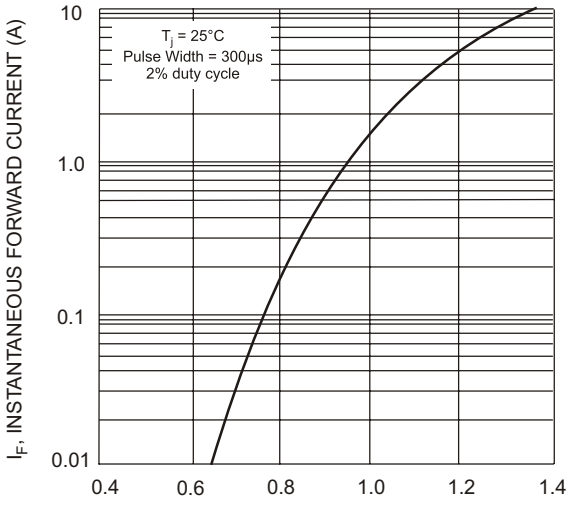

V_F, INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typ Forward Characteristics (per element)

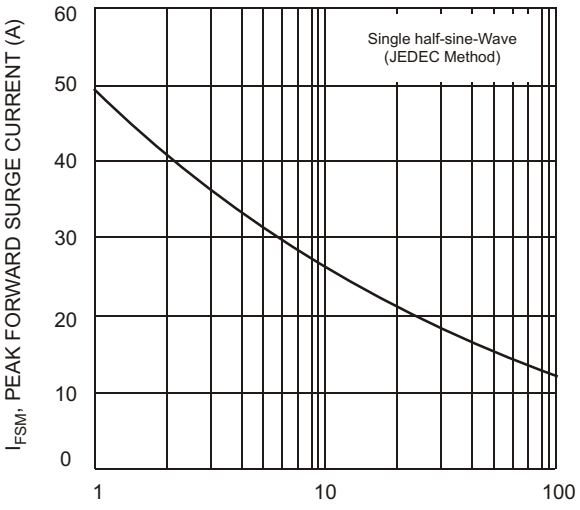

NUMBER OF CYCLES AT 60 Hz
Fig. 3 Max Non-Repetitive Peak Forward Surge Current

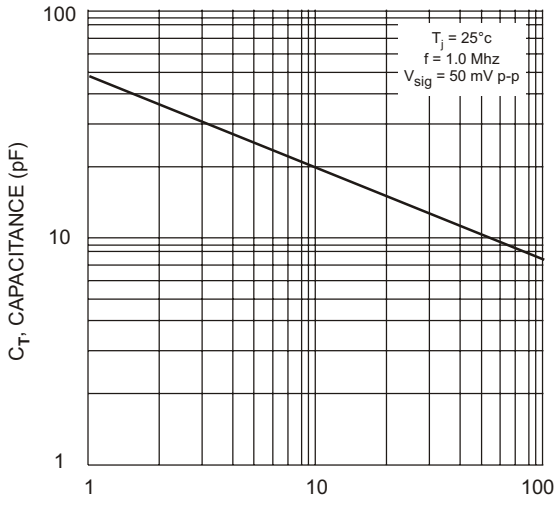

V_R, REVERSE VOLTAGE (V)
Fig. 4 Typ Junction Capacitance (per element)

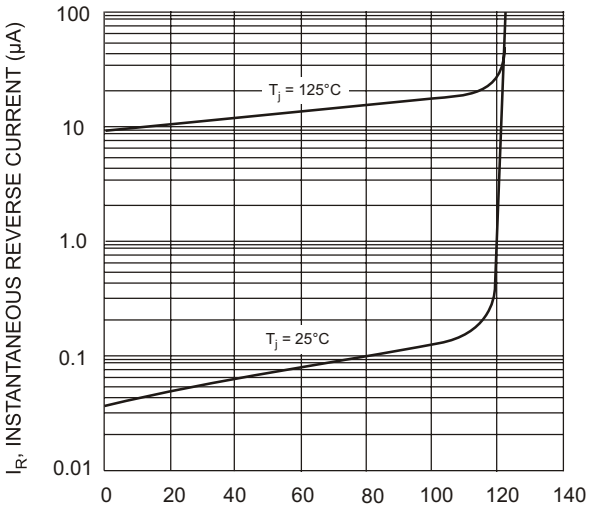

PERCENT OF RATED PEAK REVERSE VOLTAGE (%)
Fig. 5 Typ Reverse Characteristics (per element)

Ordering Information (Notes 3 & 4)

Device*	Packaging	Shipping
DFxS DFxS-T	DF-S DF-S	Tube 1500/Tape & Reel, 13-inch

* x = Device type, e.g. DF005S or DF10S, etc.

Notes: 3. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.
4. For lead free terminal plating part number, please add "-F" suffix to part number above. Example: DF10S-T-F.

Marking Information



= Manufacturers' code marking
XXXXX = Product type marking code, ex: DF10S
YWW = Date code marking
Y = Last digit of year ex: 2 for 2002
WW = Week code 01 to 52

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.