

E-Series 4-Way 0° Power Divider

5 - 1000 MHz

ESJ-4-1-75

V3.00

Features

- 4 Way
- 0°
- Surface Mount

Specifications @ 25°C

Frequency Range	5 - 1000 MHz		
Insertion Loss	Typical	Maximum	
	5 - 50 MHz	0.6 dB	0.9 dB
	50 - 500 MHz	0.7 dB	1.2 dB
	500 - 1000 MHz	1.0 dB	2.0 dB
Isolation	Typical	Minimum	
	5 - 50 MHz	30 dB	20 dB
	50 - 500 MHz	30 dB	20 dB
	500 - 1000 MHz	21 dB	13 dB
Amplitude Unbalance	Maximum		
	5 - 50 MHz	0.1 dB	
	50 - 500 MHz	0.3 dB	
	500 - 1000 MHz	0.7 dB	
Phase Unbalance	Maximum		
	5 - 50 MHz	1°	
	50 - 500 MHz	5°	
	500 - 1000 MHz	10°	
Return Loss	Typical	Minimum	
	Input	17 dB	12 dB
	Output	17 dB	14 dB

Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
ESJ-4-1-75	Tube
ESJ-4-1-75TR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temperature (10 sec)	260°C
Storage Temperature	-55°C to 100°C

SM-46

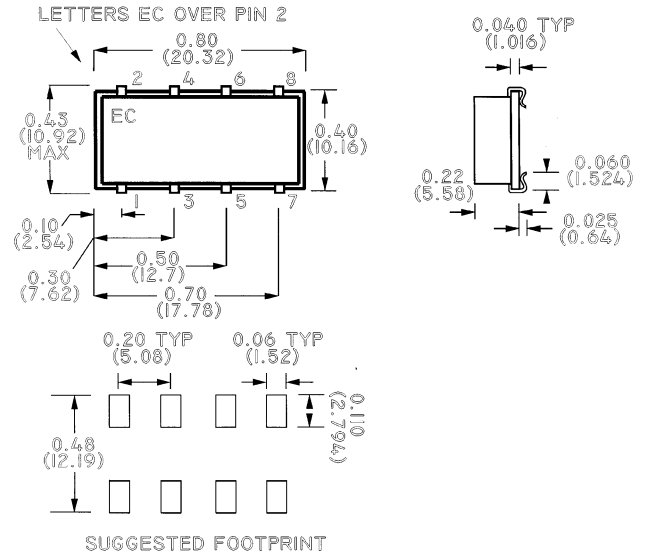

Dimensions in () are in mm.
 Unless Otherwise Noted: .x = ±0.04 (1.00)
 .xx = ±0.02 (0.50)
 .xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
Ground	1,5,7
Input	3
Port 1	2
Port 2	4
Port 3	6
Port 4	8

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.